


SY0-701 Dumps

CompTIA Security+ Exam

<https://www.certleader.com/SY0-701-dumps.html>

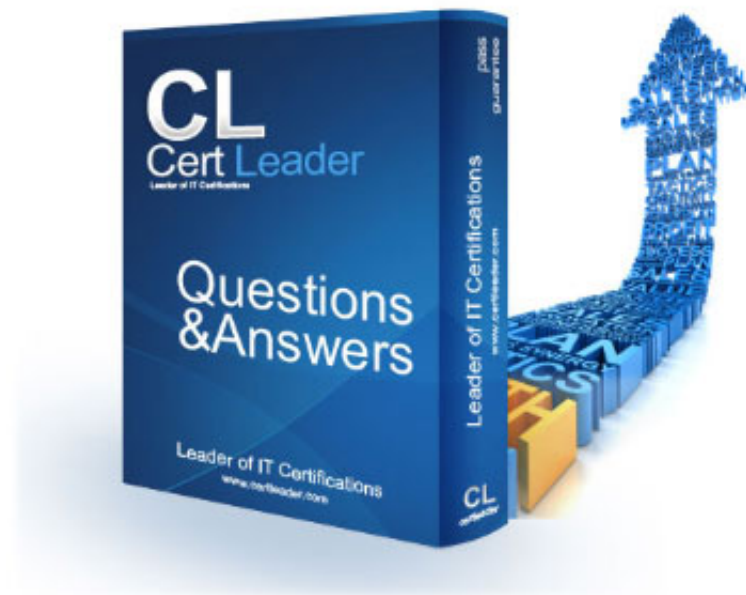

NEW QUESTION 1

Which of the following is the best reason to complete an audit in a banking environment?

- A. Regulatory requirement
- B. Organizational change
- C. Self-assessment requirement
- D. Service-level requirement

Answer: A

Explanation:

A regulatory requirement is a mandate imposed by a government or an authority that must be followed by an organization or an individual. In a banking environment, audits are often required by regulators to ensure compliance with laws, standards, and policies related to security, privacy, and financial reporting. Audits help to identify and correct any gaps or weaknesses in the security posture and the internal controls of the organization. References:

? Official CompTIA Security+ Study Guide (SY0-701), page 507

? Security+ (Plus) Certification | CompTIA IT Certifications 2

NEW QUESTION 2

An administrator assists the legal and compliance team with ensuring information about customer transactions is archived for the proper time period. Which of the following data policies is the administrator carrying out?

- A. Compromise
- B. Retention
- C. Analysis
- D. Transfer
- E. Inventory

Answer: B

Explanation:

A data retention policy is a set of rules that defines how long data should be stored and when it should be deleted or archived. An administrator assists the legal and compliance team with ensuring information about customer transactions is archived for the proper time period by following the data retention policy of the organization. This policy helps the organization to comply with legal and regulatory requirements, optimize storage space, and protect data privacy and security. References

? CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, Chapter 3, Section 3.4, page 1211

? CompTIA Security+ Practice Tests: Exam SY0-701, 3rd Edition, Chapter 3, Question 15, page 832

NEW QUESTION 3

Which of the following allows for the attribution of messages to individuals?

- A. Adaptive identity
- B. Non-repudiation
- C. Authentication
- D. Access logs

Answer: B

Explanation:

Non-repudiation is the ability to prove that a message or document was sent or signed by a particular person, and that the person cannot deny sending or signing it.

Non-repudiation can be achieved by using cryptographic techniques, such as hashing and digital signatures, that can verify the authenticity and integrity of the message or document. Non-repudiation can be useful for legal, financial, or contractual purposes, as it can provide evidence of the origin and content of the message or document. References = Non- repudiation – CompTIA Security+ SY0-701 – 1.2, CompTIA Security+ SY0-301: 6.1 – Non-repudiation, CompTIA Security+ (SY0-701) Certification Exam Objectives, Domain 1.2, page 2.

NEW QUESTION 4

A security operations center determines that the malicious activity detected on a server is normal. Which of the following activities describes the act of ignoring detected activity in the future?

- A. Tuning
- B. Aggregating
- C. Quarantining
- D. Archiving

Answer: A

Explanation:

Tuning is the activity of adjusting the configuration or parameters of a security tool or system to optimize its performance and reduce false positives or false negatives. Tuning can help to filter out the normal or benign activity that is detected by the security tool or system, and focus on the malicious or anomalous activity that requires further investigation or response. Tuning can also help to improve the efficiency and effectiveness of the security operations center by reducing the workload and alert fatigue of

the analysts. Tuning is different from aggregating, which is the activity of collecting and combining data from multiple sources or sensors to provide a comprehensive view of the security posture. Tuning is also different from quarantining, which is the activity of isolating a potentially infected or compromised device or system from the rest of the network to prevent further damage or spread. Tuning is also different from archiving, which is the activity of storing and preserving historical data or records for future reference or compliance. The act of ignoring detected activity in the future that is deemed normal by the security operations center is an example of tuning, as it involves modifying the settings or rules of the security tool or system to exclude the activity from the detection scope.

Therefore, this is the best answer among the given options. References = Security Alerting and Monitoring Concepts and Tools – CompTIA Security+ SY0-701: 4.3, video at

7:00; CompTIA Security+ SY0-701 Certification Study Guide, page 191.

NEW QUESTION 5

Which of the following is the most likely to be used to document risks, responsible parties, and thresholds?

- A. Risk tolerance
- B. Risk transfer
- C. Risk register
- D. Risk analysis

Answer: C

Explanation:

A risk register is a document that records and tracks the risks associated with a project, system, or organization. A risk register typically includes information such as the risk description, the risk owner, the risk probability, the risk impact, the risk level, the risk response strategy, and the risk status. A risk register can help identify, assess, prioritize, monitor, and control risks, as well as communicate them to relevant stakeholders. A risk register can also help document the risk tolerance and thresholds of an organization, which are the acceptable levels of risk exposure and the criteria for escalating or mitigating risks. References = CompTIA Security+ Certification Exam Objectives, Domain 5.1: Explain the importance of policies, plans, and procedures related to organizational security. CompTIA Security+ Study Guide (SY0-701), Chapter 5: Governance, Risk, and Compliance, page 211. CompTIA Security+ Certification Guide, Chapter 2: Risk Management, page 33. CompTIA Security+ Certification Exam SY0-701 Practice Test 1, Question 4.

NEW QUESTION 6

Which of the following vulnerabilities is exploited when an attacker overwrites a register with a malicious address?

- A. VM escape
- B. SQL injection
- C. Buffer overflow
- D. Race condition

Answer: C

Explanation:

A buffer overflow is a vulnerability that occurs when an application writes more data to a memory buffer than it can hold, causing the excess data to overwrite adjacent memory locations. A register is a small storage area in the CPU that holds temporary data or instructions. An attacker can exploit a buffer overflow to overwrite a register with a malicious address that points to a shellcode, which is a piece of code that gives the attacker control over the system. By doing so, the attacker can bypass the normal execution flow of the application and execute arbitrary commands.

References: CompTIA Security+ SY0-701 Certification Study Guide, Chapter 2: Threats, Attacks, and Vulnerabilities, Section 2.3: Application Attacks, Page 76 1; Buffer Overflows - CompTIA Security+ SY0-701 - 2.3 2

NEW QUESTION 7

A technician is opening ports on a firewall for a new system being deployed and supported by a SaaS provider. Which of the following is a risk in the new system?

- A. Default credentials
- B. Non-segmented network
- C. Supply chain vendor
- D. Vulnerable software

Answer: C

Explanation:

A supply chain vendor is a third-party entity that provides goods or services to an organization, such as a SaaS provider. A supply chain vendor can pose a risk to the new system if the vendor has poor security practices, breaches, or compromises that could affect the confidentiality, integrity, or availability of the system or its data. The organization should perform due diligence and establish a service level agreement with the vendor to mitigate this risk. The other options are not specific to the scenario of using a SaaS provider, but rather general risks that could apply to any system.

NEW QUESTION 8

A company is concerned about weather events causing damage to the server room and downtime. Which of the following should the company consider?

- A. Clustering servers
- B. Geographic dispersion
- C. Load balancers
- D. Off-site backups

Answer: B

Explanation:

Geographic dispersion is a strategy that involves distributing the servers or data centers across different geographic locations. Geographic dispersion can help the company to mitigate the risk of weather events causing damage to the server room and downtime, as well as improve the availability, performance, and resilience of the network. Geographic dispersion can also enhance the disaster recovery and business continuity capabilities of the company, as it can provide backup and failover options in case of a regional outage or disruption12.

The other options are not the best ways to address the company's concern:

? Clustering servers: This is a technique that involves grouping multiple servers together to act as a single system. Clustering servers can help to improve the performance, scalability, and fault tolerance of the network, but it does not protect the servers from physical damage or downtime caused by weather events, especially if the servers are located in the same room or building3.

? Load balancers: These are devices or software that distribute the network traffic or workload among multiple servers or resources. Load balancers can help to optimize the utilization, efficiency, and reliability of the network, but they do not prevent the servers from being damaged or disrupted by weather events, especially if the servers are located in the same room or building4.

? Off-site backups: These are copies of data or files that are stored in a different location than the original source. Off-site backups can help to protect the data from being lost or corrupted by weather events, but they do not prevent the servers from being damaged or disrupted by weather events, nor do they ensure the

availability or continuity of the network services.

References = 1: CompTIA Security+ SY0-701 Certification Study Guide, page 972: High Availability – CompTIA Security+ SY0-701 – 3.4, video by Professor Messer3: CompTIA Security+ SY0-701 Certification Study Guide, page 984: CompTIA Security+ SY0-701 Certification Study Guide, page 99. : CompTIA Security+ SY0-701 Certification Study Guide, page 100.

NEW QUESTION 9

An organization disabled unneeded services and placed a firewall in front of a business- critical legacy system. Which of the following best describes the actions taken by the organization?

- A. Exception
- B. Segmentation
- C. Risk transfer
- D. Compensating controls

Answer: D

Explanation:

Compensating controls are alternative security measures that are implemented when the primary controls are not feasible, cost-effective, or sufficient to mitigate the risk. In this case, the organization used compensating controls to protect the legacy system from potential attacks by disabling unneeded services and placing a firewall in front of it. This reduced the attack surface and the likelihood of exploitation.

References:

? Official CompTIA Security+ Study Guide (SY0-701), page 29

? Security Controls - CompTIA Security+ SY0-701 - 1.1 1

NEW QUESTION 10

A security engineer is implementing FDE for all laptops in an organization. Which of the following are the most important for the engineer to consider as part of the planning process? (Select two).

- A. Key escrow
- B. TPM presence
- C. Digital signatures
- D. Data tokenization
- E. Public key management
- F. Certificate authority linking

Answer: AB

Explanation:

? Key escrow is a method of storing encryption keys in a secure location, such as a trusted third party or a hardware security module (HSM). Key escrow is important for FDE because it allows the recovery of encrypted data in case of lost or forgotten passwords, device theft, or hardware failure. Key escrow also enables authorized access to encrypted data for legal or forensic purposes.

? TPM presence is a feature of some laptops that have a dedicated chip for storing encryption keys and other security information. TPM presence is important for FDE because it enhances the security and performance of encryption by generating and protecting the keys within the chip, rather than relying on software or external devices. TPM presence also enables features such as secure boot, remote attestation, and device authentication.

NEW QUESTION 10

After a security awareness training session, a user called the IT help desk and reported a suspicious call. The suspicious caller stated that the Chief Financial Officer wanted credit card information in order to close an invoice. Which of the following topics did the user recognize from the training?

- A. Insider threat
- B. Email phishing
- C. Social engineering
- D. Executive whaling

Answer: C

Explanation:

Social engineering is the practice of manipulating people into performing actions or divulging confidential information, often by impersonating someone else or creating a sense of urgency or trust. The suspicious caller in this scenario was trying to use social engineering to trick the user into giving away credit card information by pretending to be the CFO and asking for a payment. The user recognized this as a potential scam and reported it to the IT help desk. The other topics are not relevant to this

situation. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, page 19 1

NEW QUESTION 13

A security analyst reviews domain activity logs and notices the following:

```
UserID jsmith, password authentication: succeeded, MFA: failed (invalid code)
UserID jsmith, password authentication: succeeded, MFA: failed (invalid code)
UserID jsmith, password authentication: succeeded, MFA: failed (invalid code)
UserID jsmith, password authentication: succeeded, MFA: failed (invalid code)
```

Which of the following is the best explanation for what the security analyst has discovered?

- A. The user jsmith's account has been locked out.
- B. A keylogger is installed on [smith's workstation
- C. An attacker is attempting to brute force ismith's account.
- D. Ransomware has been deployed in the domain.

Answer: C

Explanation:

Brute force is a type of attack that tries to guess the password or other credentials of a user account by using a large number of possible combinations. An attacker can use automated tools or scripts to perform a brute force attack and gain unauthorized access to the account. The domain activity logs show that the user ismith has failed to log in 10 times in a row within a short period of time, which is a strong indicator of a brute force attack. The logs also show that the source IP address of the failed logins is different from the usual IP address of ismith, which suggests that the attacker is using a different device or location to launch the attack. The security analyst should take immediate action to block the attacker's IP address, reset ismith's password, and notify ismith of the incident. References = CompTIA Security+ Study Guide with over 500 Practice Test Questions: Exam SY0-701, 9th Edition, Chapter 1, page 14. CompTIA Security+ (SY0-701) Certification Exam Objectives, Domain 1.1, page 2. Threat Actors and Attributes – SY0-601 CompTIA Security+ : 1.1

NEW QUESTION 18

A company decided to reduce the cost of its annual cyber insurance policy by removing the coverage for ransomware attacks. Which of the following analysis elements did the company most likely use in making this decision?

- A. IMTTR
- B. RTO
- C. ARO
- D. MTBF

Answer: C

Explanation:

ARO (Annualized Rate of Occurrence) is an analysis element that measures the frequency or likelihood of an event happening in a given year. ARO is often used in risk assessment and management, as it helps to estimate the potential loss or impact of an event. A company can use ARO to calculate the annualized loss expectancy (ALE) of an event, which is the product of ARO and the single loss expectancy (SLE). ALE represents the expected cost of an event per year, and can be used to compare with the cost of implementing a security control or purchasing an insurance policy.

The company most likely used ARO in making the decision to remove the coverage for ransomware attacks from its cyber insurance policy. The company may have estimated the ARO of ransomware attacks based on historical data, industry trends, or threat intelligence, and found that the ARO was low or negligible. The company may have also calculated the ALE of ransomware attacks, and found that the ALE was lower than the cost of the insurance policy. Therefore, the company decided to reduce the cost of its annual cyber insurance policy by removing the coverage for ransomware attacks, as it deemed the risk to be acceptable or manageable.

IMTTR (Incident Management Team Training and Readiness), RTO (Recovery Time Objective), and MTBF (Mean Time Between Failures) are not analysis elements that the company most likely used in making the decision to remove the coverage for ransomware attacks from its cyber insurance policy. IMTTR is a process of preparing and training the incident management team to respond effectively to security incidents. IMTTR does not measure the frequency or impact of an event, but rather the capability and readiness of the team. RTO is a metric that defines the maximum acceptable time for restoring a system or service after a disruption. RTO does not measure the frequency or impact of an event, but rather the availability and continuity of the system or service. MTBF is a metric that measures the average time between failures of a system or component. MTBF does not measure the frequency or impact of an event, but rather the reliability and performance of the system or component.

References = CompTIA Security+ SY0-701 Certification Study Guide, page 97-

98; Professor Messer's CompTIA SY0-701 Security+ Training Course, video 5.2 - Risk Management, 0:00 - 3:00.

NEW QUESTION 19

After a recent vulnerability scan, a security engineer needs to harden the routers within the corporate network. Which of the following is the most appropriate to disable?

- A. Console access
- B. Routing protocols
- C. VLANs
- D. Web-based administration

Answer: D

Explanation:

Web-based administration is a feature that allows users to configure and manage routers through a web browser interface. While this feature can provide convenience and ease of use, it can also pose a security risk, especially if the web interface is exposed to the internet or uses weak authentication or encryption methods. Web-based administration can be exploited by attackers to gain unauthorized access to the router's settings, firmware, or data, or to launch attacks such as cross-site scripting (XSS) or cross-site request forgery (CSRF). Therefore, disabling web-based administration is a good practice to harden the routers within the corporate network. Console access, routing protocols, and VLANs are other features that can be configured on routers, but they are not the most appropriate to disable for hardening purposes. Console access is a physical connection to the router that requires direct access to the device, which can be secured by locking the router in a cabinet or using a strong password. Routing protocols are essential for routers to exchange routing information and maintain network connectivity, and they can be secured by using authentication or encryption mechanisms. VLANs are logical segments of a network that can enhance network performance and security by isolating traffic and devices, and they can be secured by using VLAN access control lists (VACLs) or private VLANs (PVLANS). References: CCNA SEC: Router Hardening Your Router's Security Stinks: Here's How to Fix It

NEW QUESTION 20

Which of the following factors are the most important to address when formulating a training curriculum plan for a security awareness program? (Select two).

- A. Channels by which the organization communicates with customers
- B. The reporting mechanisms for ethics violations
- C. Threat vectors based on the industry in which the organization operates
- D. Secure software development training for all personnel
- E. Cadence and duration of training events
- F. Retraining requirements for individuals who fail phishing simulations

Answer: CE

Explanation:

A training curriculum plan for a security awareness program should address the following factors:

? The threat vectors based on the industry in which the organization operates. This will help the employees to understand the specific risks and challenges that their organization faces, and how to protect themselves and the organization from cyberattacks. For example, a healthcare organization may face different threat vectors than a financial organization, such as ransomware, data breaches, or medical device hacking1.

? The cadence and duration of training events. This will help the employees to retain the information and skills they learn, and to keep up with the changing security landscape. The training events should be frequent enough to reinforce the key concepts and behaviors, but not too long or too short to lose the attention or interest of the employees. For example, a security awareness program may include monthly newsletters, quarterly webinars, annual workshops, or periodic quizzes².
References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, Chapter 2, page 34; CompTIA Security+ Certification Kit: Exam SY0-701, 7th Edition, Chapter 2, page 55.

NEW QUESTION 22

After a company was compromised, customers initiated a lawsuit. The company's attorneys have requested that the security team initiate a legal hold in response to the lawsuit. Which of the following describes the action the security team will most likely be required to take?

- A. Retain the emails between the security team and affected customers for 30 days.
- B. Retain any communications related to the security breach until further notice.
- C. Retain any communications between security members during the breach response.
- D. Retain all emails from the company to affected customers for an indefinite period of time.

Answer: B

Explanation:

A legal hold (also known as a litigation hold) is a notification sent from an organization's legal team to employees instructing them not to delete electronically stored information (ESI) or discard paper documents that may be relevant to a new or imminent legal case. A legal hold is intended to preserve evidence and prevent spoliation, which is the intentional or negligent destruction of evidence that could harm a party's case. A legal hold can be triggered by various events, such as a lawsuit, a regulatory investigation, or a subpoena¹² In this scenario, the company's attorneys have requested that the security team initiate a legal hold in response to the lawsuit filed by the customers after the company was compromised. This means that the security team will most likely be required to retain any communications related to the security breach until further notice. This could include emails, instant messages, reports, logs, memos, or any other documents that could be relevant to the lawsuit. The security team should also inform the relevant custodians (the employees who have access to or control over the ESI) of their preservation obligations and monitor their compliance. The security team should also document the legal hold process and its scope, as well as take steps to protect the ESI from alteration, deletion, or loss³⁴

References:

1: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, Chapter 6: Risk Management, page 303 2: CompTIA Security+ Certification Kit: Exam SY0-701, 7th Edition, Chapter 6: Risk Management, page 305 3: Legal Hold (Litigation Hold) - The Basics of E-Discovery - Exterro 5 4: The Legal Implications and Consequences of a Data Breach 6

NEW QUESTION 23

Which of the following best practices gives administrators a set period to perform changes to an operational system to ensure availability and minimize business impacts?

- A. Impact analysis
- B. Scheduled downtime
- C. Backout plan
- D. Change management boards

Answer: B

Explanation:

Scheduled downtime is a planned period of time when a system or service is unavailable for maintenance, updates, upgrades, or other changes. Scheduled downtime gives administrators a set period to perform changes to an operational system without disrupting the normal business operations or affecting the availability of the system or service. Scheduled downtime also allows administrators to inform the users and stakeholders about the expected duration and impact of the changes. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, Chapter 12: Security Operations and Administration, page 579 1

NEW QUESTION 24

A company is expanding its threat surface program and allowing individuals to security test the company's internet-facing application. The company will compensate researchers based on the vulnerabilities discovered. Which of the following best describes the program the company is setting up?

- A. Open-source intelligence
- B. Bug bounty
- C. Red team
- D. Penetration testing

Answer: B

Explanation:

A bug bounty is a program that rewards security researchers for finding and reporting vulnerabilities in an application or system. Bug bounties are often used by companies to improve their security posture and incentivize ethical hacking. A bug bounty program typically defines the scope, rules, and compensation for the researchers. References = CompTIA Security+ Study Guide with over 500 Practice Test Questions: Exam SY0-701, 9th Edition, Chapter 1, page 10. CompTIA Security+ (SY0-701) Certification Exam Objectives, Domain 1.1, page 2.

NEW QUESTION 29

An enterprise has been experiencing attacks focused on exploiting vulnerabilities in older browser versions with well-known exploits. Which of the following security solutions should be configured to best provide the ability to monitor and block these known signature-based attacks?

- A. ACL
- B. DLP
- C. IDS
- D. IPS

Answer: D

Explanation:

An intrusion prevention system (IPS) is a security device that monitors network traffic and blocks or modifies malicious packets based on predefined rules or signatures. An IPS can prevent attacks that exploit known vulnerabilities in older browser versions by detecting and dropping the malicious packets before they reach the target system. An IPS can also perform other functions, such as rate limiting, encryption, or redirection. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, Chapter 3: Securing Networks, page 132.

NEW QUESTION 31

A security analyst is reviewing alerts in the SIEM related to potential malicious network traffic coming from an employee's corporate laptop. The security analyst has determined that additional data about the executable running on the machine is necessary to continue the investigation. Which of the following logs should the analyst use as a data source?

- A. Application
- B. IPS/IDS
- C. Network
- D. Endpoint

Answer: D

Explanation:

An endpoint log is a file that contains information about the activities and events that occur on an end-user device, such as a laptop, desktop, tablet, or smartphone. Endpoint logs can provide valuable data for security analysts, such as the processes running on the device, the network connections established, the files accessed or modified, the user actions performed, and the applications installed or updated. Endpoint logs can also record the details of any executable files running on the device, such as the name, path, size, hash, signature, and permissions of the executable.

An application log is a file that contains information about the events that occur within a software application, such as errors, warnings, transactions, or performance metrics. Application logs can help developers and administrators troubleshoot issues, optimize performance, and monitor user behavior. However, application logs may not provide enough information about the executable files running on the device, especially if they are malicious or unknown.

An IPS/IDS log is a file that contains information about the network traffic that is monitored and analyzed by an intrusion prevention system (IPS) or an intrusion detection system (IDS). IPS/IDS logs can help security analysts identify and block potential attacks, such as exploit attempts, denial-of-service (DoS) attacks, or malicious scans. However, IPS/IDS logs may not provide enough information about the executable files running on the device, especially if they are encrypted, obfuscated, or use legitimate protocols.

A network log is a file that contains information about the network activity and communication that occurs between devices, such as IP addresses, ports, protocols, packets, or bytes. Network logs can help security analysts understand the network topology, traffic patterns, and bandwidth usage. However, network logs may not provide enough information about the executable files running on the device, especially if they are hidden, spoofed, or use proxy servers.

Therefore, the best log type to use as a data source for additional information about the executable running on the machine is the endpoint log, as it can provide the most relevant and detailed data about the executable file and its behavior.

References = <https://www.crowdstrike.com/cybersecurity-101/observability/application-log/>

<https://owasp.org/www-project-proactive-controls/v3/en/c9-security-logging>

NEW QUESTION 34

An organization wants a third-party vendor to do a penetration test that targets a specific device. The organization has provided basic information about the device. Which of the following best describes this kind of penetration test?

- A. Partially known environment
- B. Unknown environment
- C. Integrated
- D. Known environment

Answer: A

Explanation:

A partially known environment is a type of penetration test where the tester has some information about the target, such as the IP address, the operating system, or the device type. This can help the tester focus on specific vulnerabilities and reduce the scope of the test. A partially known environment is also called a gray box test¹. References: CompTIA Security+ Certification Kit: Exam SY0-701, 7th Edition, Chapter 10, page 543.

NEW QUESTION 35

A Chief Information Security Officer (CISO) wants to explicitly raise awareness about the increase of ransomware-as-a-service in a report to the management team. Which of the following best describes the threat actor in the CISO's report?

- A. Insider threat
- B. Hacktivist
- C. Nation-state
- D. Organized crime

Answer: D

Explanation:

Ransomware-as-a-service is a type of cybercrime where hackers sell or rent ransomware tools or services to other criminals who use them to launch attacks and extort money from victims. This is a typical example of organized crime, which is a group of criminals who work together to conduct illegal activities for profit. Organized crime is different from other types of threat actors, such as insider threats, hacktivists, or nation-states, who may have different motives, methods, or targets. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, page 17 1

NEW QUESTION 39

Which of the following should a systems administrator use to ensure an easy deployment of resources within the cloud provider?

- A. Software as a service
- B. Infrastructure as code
- C. Internet of Things
- D. Software-defined networking

Answer: B

Explanation:

Infrastructure as code (IaC) is a method of using code and automation to manage and provision cloud resources, such as servers, networks, storage, and applications. IaC allows for easy deployment, scalability, consistency, and repeatability of cloud environments. IaC is also a key component of DevSecOps, which integrates security into the development and operations processes. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, Chapter 6: Cloud and Virtualization Concepts, page 294.

NEW QUESTION 42

Which of the following is used to validate a certificate when it is presented to a user?

- A. OCSP
- B. CSR
- C. CA
- D. CRC

Answer: A

Explanation:

OCSP stands for Online Certificate Status Protocol. It is a protocol that allows applications to check the revocation status of a certificate in real-time. It works by sending a query to an OCSP responder, which is a server that maintains a database of revoked certificates. The OCSP responder returns a response that indicates whether the certificate is valid, revoked, or unknown. OCSP is faster and more efficient than downloading and parsing Certificate Revocation Lists (CRLs), which are large files that contain the serial numbers of all revoked certificates issued by a Certificate Authority (CA). References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, page 337 1

NEW QUESTION 44

An organization recently updated its security policy to include the following statement:

Regular expressions are included in source code to remove special characters such as \$, |, ;, &, ` , and ? from variables set by forms in a web application.

Which of the following best explains the security technique the organization adopted by making this addition to the policy?

- A. Identify embedded keys
- B. Code debugging
- C. Input validation
- D. Static code analysis

Answer: C

Explanation:

Input validation is a security technique that checks the user input for any malicious or unexpected data before processing it by the application. Input validation can prevent various types of attacks, such as injection, cross-site scripting, buffer overflow, and command execution, that exploit the vulnerabilities in the application code. Input validation can be performed on both the client-side and the server-side, using methods such as whitelisting, blacklisting, filtering, sanitizing, escaping, and encoding. By including regular expressions in the source code to remove special characters from the variables set by the forms in the web application, the organization adopted input validation as a security technique. Regular expressions are patterns that match a specific set of characters or strings, and can be used to filter out any unwanted or harmful input. Special characters, such as \$, |, ;, &, ` , and ? , can be used by attackers to inject commands or scripts into the application, and cause damage or data theft. By removing these characters from the input, the organization can reduce the risk of such attacks.

Identify embedded keys, code debugging, and static code analysis are not the security techniques that the organization adopted by making this addition to the policy. Identify embedded keys is a process of finding and removing any hard-coded keys or credentials from the source code, as these can pose a security risk if exposed or compromised. Code debugging is a process of finding and fixing any errors or bugs in the source code, which can affect the functionality or performance of the application. Static code analysis is a process of analyzing the source code without executing it, to identify any vulnerabilities, flaws, or coding standards violations. These techniques are not related to the use of regular expressions to remove special characters from the input.

References = CompTIA Security+ SY0-701 Certification Study Guide, page 375-376; Professor Messer's CompTIA SY0-701 Security+ Training Course, video 4.1 - Vulnerability Scanning, 8:00 - 9:08; Application Security – SY0-601 CompTIA Security+ : 3.2, 0:00 - 2:00.

NEW QUESTION 49

A systems administrator wants to prevent users from being able to access data based on their responsibilities. The administrator also wants to apply the required access structure via a simplified format. Which of the following should the administrator apply to the site recovery resource group?

- A. RBAC
- B. ACL
- C. SAML
- D. GPO

Answer: A

Explanation:

RBAC stands for Role-Based Access Control, which is a method of restricting access to data and resources based on the roles or responsibilities of users. RBAC simplifies the management of permissions by assigning roles to users and granting access rights to roles, rather than to individual users. RBAC can help enforce the principle of least privilege and reduce the risk of unauthorized access or data leakage. The other options are not as suitable for the scenario as RBAC, as they either do not prevent access based on responsibilities, or do not apply a simplified format. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, page 133 1

NEW QUESTION 52

Which of the following is the most likely to be included as an element of communication in a security awareness program?

- A. Reporting phishing attempts or other suspicious activities
- B. Detecting insider threats using anomalous behavior recognition
- C. Verifying information when modifying wire transfer data
- D. Performing social engineering as part of third-party penetration testing

Answer: A

Explanation:

A security awareness program is a set of activities and initiatives that aim to educate and inform the users and employees of an organization about the security policies, procedures, and best practices. A security awareness program can help to reduce the human factor in security risks, such as social engineering, phishing, malware, data breaches, and insider threats. A security awareness program should include various elements of communication, such as newsletters, posters, videos, webinars, quizzes, games, simulations, and feedback mechanisms, to deliver the security messages and reinforce the security culture. One of the most likely elements of communication to be included in a security awareness program is reporting phishing attempts or other suspicious activities, as this can help to raise the awareness of the users and employees about the common types of cyberattacks and how to respond to them. Reporting phishing attempts or other suspicious activities can also help to alert the security team and enable them to take appropriate actions to prevent or mitigate the impact of the attacks. Therefore, this is the best answer among the given options.

The other options are not as likely to be included as elements of communication in a security awareness program, because they are either technical or operational tasks that are not directly related to the security awareness of the users and employees. Detecting insider threats using anomalous behavior recognition is a technical task that involves using security tools or systems to monitor and analyze the activities and behaviors of the users and employees and identify any deviations or anomalies that may indicate malicious or unauthorized actions. This task is usually performed by the security team or the security operations center, and it does not require the communication or participation of the users and employees. Verifying information when modifying wire transfer data is an operational task that involves using verification methods, such as phone calls, emails, or digital signatures, to confirm the authenticity and accuracy of the information related to wire transfers, such as the account number, the amount, or the recipient. This task is usually performed by the financial or accounting department, and it does not involve the security awareness of the users and employees. Performing social engineering as part of third-party penetration testing is a technical task that involves using deception or manipulation techniques, such as phishing, vishing, or impersonation, to test the security posture and the vulnerability of the users and employees to social engineering attacks. This task is usually performed by external security professionals or consultants, and it does not require the communication or consent of the users and employees. Therefore, these options are not the best answer for this question. References = Security Awareness and Training –

CompTIA Security+ SY0-701: 5.2, video at 0:00; CompTIA Security+ SY0-701 Certification Study Guide, page 263.

NEW QUESTION 56

Which of the following is used to add extra complexity before using a one-way data transformation algorithm?

- A. Key stretching
- B. Data masking
- C. Steganography
- D. Salting

Answer: D

Explanation:

Salting is the process of adding extra random data to a password or other data before applying a one-way data transformation algorithm, such as a hash function. Salting increases the complexity and randomness of the input data, making it harder for attackers to guess or crack the original data using precomputed tables or brute force methods. Salting also helps prevent identical passwords from producing identical hash values, which could reveal the passwords to attackers who have access to the hashed data. Salting is commonly used to protect passwords stored in databases or transmitted over networks. References =

? Passwords technical overview

? Encryption, hashing, salting – what's the difference?

? Salt (cryptography)

NEW QUESTION 57

Which of the following security concepts is the best reason for permissions on a human resources fileshare to follow the principle of least privilege?

- A. Integrity
- B. Availability
- C. Confidentiality
- D. Non-repudiation

Answer: C

Explanation:

Confidentiality is the security concept that ensures data is protected from unauthorized access or disclosure. The principle of least privilege is a technique that grants users or systems the minimum level of access or permissions that they need to perform their tasks, and nothing more. By applying the principle of least privilege to a human resources fileshare, the permissions can be restricted to only those who have a legitimate need to access the sensitive data, such as HR staff, managers, or auditors. This can prevent unauthorized users, such as hackers, employees, or contractors, from accessing, copying, modifying, or deleting the data. Therefore, the principle of least privilege can enhance the confidentiality of the data on the fileshare. Integrity, availability, and non-repudiation are other security concepts, but they are not the best reason for permissions on a human resources fileshare to follow the principle of least privilege. Integrity is the security concept that ensures data is accurate and consistent, and protected from unauthorized modification or corruption. Availability is the security concept that ensures data is accessible and usable by authorized users or systems when needed. Non-repudiation is the security concept that ensures the authenticity and accountability of data and actions, and prevents the denial of involvement or responsibility. While these concepts are also important for data security, they are not directly related to the level of access or permissions granted to users or systems. References: CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, page 16-17, 372-373

NEW QUESTION 60

An analyst is evaluating the implementation of Zero Trust principles within the data plane. Which of the following would be most relevant for the analyst to evaluate?

- A. Secured zones
- B. Subject role
- C. Adaptive identity
- D. Threat scope reduction

Answer: A

Explanation:

Secured zones are a key component of the Zero Trust data plane, which is the layer where data is stored, processed, and transmitted. Secured zones are logical

or physical segments of the network that isolate data and resources based on their sensitivity and risk. Secured zones enforce granular policies and controls to prevent unauthorized access and lateral movement within the network¹.

References: CompTIA Security+ Certification Kit: Exam SY0-701, 7th Edition, Chapter 5, page 255.

NEW QUESTION 63

A company is developing a critical system for the government and storing project information on a fileshare. Which of the following describes how this data will most likely be classified? (Select two).

- A. Private
- B. Confidential
- C. Public
- D. Operational
- E. Urgent
- F. Restricted

Answer: BF

Explanation:

Data classification is the process of assigning labels to data based on its sensitivity and business impact. Different organizations and sectors may have different data classification schemes, but a common one is the following¹:

? Public: Data that can be freely disclosed to anyone without any harm or risk.

? Private: Data that is intended for internal use only and may cause some harm or risk if disclosed.

? Confidential: Data that is intended for authorized use only and may cause significant harm or risk if disclosed.

? Restricted: Data that is intended for very limited use only and may cause severe harm or risk if disclosed.

In this scenario, the company is developing a critical system for the government and storing project information on a fileshare. This data is likely to be classified as confidential and restricted, because it is not meant for public or private use, and it may cause serious damage to national security or public safety if disclosed. The government may also have specific requirements or regulations for handling such data, such as encryption, access control, and auditing². References: 1:

CompTIA Security+ Study Guide: Exam SY0-701, 9th Edition, page 16-17 2: Data Classification Practices: Final Project Description Released

NEW QUESTION 67

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your SY0-701 Exam with Our Prep Materials Via below:

<https://www.certleader.com/SY0-701-dumps.html>