



Google

Exam Questions Professional-Cloud-Architect

Google Certified Professional - Cloud Architect (GCP)

NEW QUESTION 1

- (Exam Topic 1)

For this question, refer to the Mountkirk Games case study.

Mountkirk Games wants you to design their new testing strategy. How should the test coverage differ from their existing backends on the other platforms?

- A. Tests should scale well beyond the prior approaches.
- B. Unit tests are no longer required, only end-to-end tests.
- C. Tests should be applied after the release is in the production environment.
- D. Tests should include directly testing the Google Cloud Platform (GCP) infrastructure.

Answer: A

Explanation:

From Scenario:

A few of their games were more popular than expected, and they had problems scaling their application servers, MySQL databases, and analytics tools.

Requirements for Game Analytics Platform include: Dynamically scale up or down based on game activity

NEW QUESTION 2

- (Exam Topic 1)

For this question, refer to the Mountkirk Games case study.

Mountkirk Games wants to set up a real-time analytics platform for their new game. The new platform must meet their technical requirements. Which combination of Google technologies will meet all of their requirements?

- A. Container Engine, Cloud Pub/Sub, and Cloud SQL
- B. Cloud Dataflow, Cloud Storage, Cloud Pub/Sub, and BigQuery
- C. Cloud SQL, Cloud Storage, Cloud Pub/Sub, and Cloud Dataflow
- D. Cloud Dataproc, Cloud Pub/Sub, Cloud SQL, and Cloud Dataflow
- E. Cloud Pub/Sub, Compute Engine, Cloud Storage, and Cloud Dataproc

Answer: B

Explanation:

A real time requires Stream / Messaging so Pub/Sub, Analytics by Big Query.

Ingest millions of streaming events per second from anywhere in the world with Cloud Pub/Sub, powered by Google's unique, high-speed private network. Process the streams with Cloud Dataflow to ensure reliable, exactly-once, low-latency data transformation. Stream the transformed data into BigQuery, the cloud-native data warehousing service, for immediate analysis via SQL or popular visualization tools.

From scenario: They plan to deploy the game's backend on Google Compute Engine so they can capture streaming metrics, run intensive analytics.

Requirements for Game Analytics Platform

- Dynamically scale up or down based on game activity
- Process incoming data on the fly directly from the game servers
- Process data that arrives late because of slow mobile networks
- Allow SQL queries to access at least 10 TB of historical data
- Process files that are regularly uploaded by users' mobile devices
- Use only fully managed services

References: <https://cloud.google.com/solutions/big-data/stream-analytics/>

NEW QUESTION 3

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

TerramEarth plans to connect all 20 million vehicles in the field to the cloud. This increases the volume to 20 million 600 byte records a second for 40 TB an hour.

How should you design the data ingestion?

- A. Vehicles write data directly to GCS.
- B. Vehicles write data directly to Google Cloud Pub/Sub.
- C. Vehicles stream data directly to Google BigQuery.
- D. Vehicles continue to write data using the existing system (FTP).

Answer: B

Explanation:

<https://cloud.google.com/solutions/data-lifecycle-cloud-platform>

<https://cloud.google.com/solutions/designing-connected-vehicle-platform>

NEW QUESTION 4

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

The TerramEarth development team wants to create an API to meet the company's business requirements. You want the development team to focus their development effort on business value versus creating a custom framework. Which method should they use?

- A. Use Google App Engine with Google Cloud Endpoint
- B. Focus on an API for dealers and partners.
- C. Use Google App Engine with a JAX-RS Jersey Java-based framewor
- D. Focus on an API for the public.
- E. Use Google App Engine with the Swagger (open API Specification) framewor
- F. Focus on an API for the public.
- G. Use Google Container Engine with a Django Python containe

- H. Focus on an API for the public.
- I. Use Google Container Engine with a Tomcat container with the Swagger (Open API Specification) framework
- J. Focus on an API for dealers and partners.

Answer: A

Explanation:

https://cloud.google.com/endpoints/docs/openapi/about-cloud-endpoints?hl=en_US&_ga=2.21787131.-1712523

<https://cloud.google.com/endpoints/docs/openapi/architecture-overview> <https://cloud.google.com/storage/docs/gsutil/commands/test>

Develop, deploy, protect and monitor your APIs with Google Cloud Endpoints. Using an Open API Specification or one of our API frameworks, Cloud Endpoints gives you the tools you need for every phase of API development.

From scenario: Business Requirements

Decrease unplanned vehicle downtime to less than 1 week, without increasing the cost of carrying surplus inventory

Support the dealer network with more data on how their customers use their equipment to better position new products and services

Have the ability to partner with different companies – especially with seed and fertilizer suppliers in the fast-growing agricultural business – to create compelling joint offerings for their customers.

Reference: <https://cloud.google.com/certification/guides/cloud-architect/casestudy-terramearth>

NEW QUESTION 5

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

TerramEarth has equipped unconnected trucks with servers and sensors to collect telemetry data. Next year they want to use the data to train machine learning models. They want to store this data in the cloud while reducing costs. What should they do?

- A. Have the vehicle's computer compress the data in hourly snapshots, and store it in a Google Cloud storage (GCS) Nearline bucket.
- B. Push the telemetry data in Real-time to a streaming dataflow job that compresses the data, and store it in Google BigQuery.
- C. Push the telemetry data in real-time to a streaming dataflow job that compresses the data, and store it in Cloud Bigtable.
- D. Have the vehicle's computer compress the data in hourly snapshots, and store it in a GCS Coldline bucket.

Answer: D

Explanation:

Coldline Storage is the best choice for data that you plan to access at most once a year, due to its slightly lower availability, 90-day minimum storage duration, costs for data access, and higher per-operation costs. For example:

Cold Data Storage - Infrequently accessed data, such as data stored for legal or regulatory reasons, can be stored at low cost as Coldline Storage, and be available when you need it.

Disaster recovery - In the event of a disaster recovery event, recovery time is key. Cloud Storage provides low latency access to data stored as Coldline Storage.

References: <https://cloud.google.com/storage/docs/storage-classes>

NEW QUESTION 6

- (Exam Topic 3)

For this question, refer to the JencoMart case study.

JencoMart has decided to migrate user profile storage to Google Cloud Datastore and the application servers to Google Compute Engine (GCE). During the migration, the existing infrastructure will need access to Datastore to upload the data. What service account key-management strategy should you recommend?

- A. Provision service account keys for the on-premises infrastructure and for the GCE virtual machines (VMs).
- B. Authenticate the on-premises infrastructure with a user account and provision service account keys for the VMs.
- C. Provision service account keys for the on-premises infrastructure and use Google Cloud Platform (GCP) managed keys for the VMs
- D. Deploy a custom authentication service on GCE/Google Container Engine (GKE) for the on-premises infrastructure and use GCP managed keys for the VMs.

Answer: A

Explanation:

<https://cloud.google.com/iam/docs/understanding-service-accounts>

Migrating data to Google Cloud Platform

Let's say that you have some data processing that happens on another cloud provider and you want to transfer the processed data to Google Cloud Platform. You can use a service account from the virtual machines on the external cloud to push the data to Google Cloud Platform. To do this, you must create and download a service account key when you create the service account and then use that key from the external process to call the Cloud Platform APIs.

References:


https://cloud.google.com/iam/docs/understanding-service-accounts#migrating_data_to_google_cloud_platform

NEW QUESTION 7

- (Exam Topic 3)

For this question, refer to the JencoMart case study.

The migration of JencoMart's application to Google Cloud Platform (GCP) is progressing too slowly. The infrastructure is shown in the diagram. You want to maximize throughput. What are three potential bottlenecks? (Choose 3 answers.)

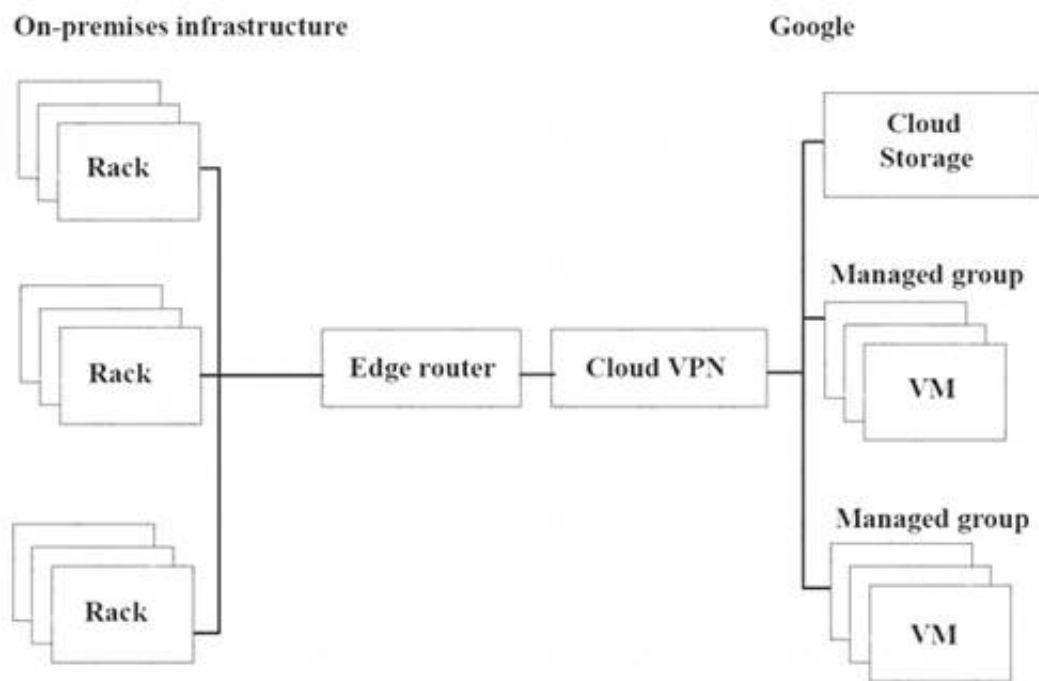

- A. A single VPN tunnel, which limits throughput
- B. A tier of Google Cloud Storage that is not suited for this task
- C. A copy command that is not suited to operate over long distances
- D. Fewer virtual machines (VMs) in GCP than on-premises machines
- E. A separate storage layer outside the VMs, which is not suited for this task
- F. Complicated internet connectivity between the on-premises infrastructure and GCP

Answer: ADF

NEW QUESTION 8

- (Exam Topic 4)

The current Dress4win system architecture has high latency to some customers because it is located in one data center.

As of a future evaluation and optimizing for performance in the cloud, Dress4win wants to distribute its system architecture to multiple locations when Google cloud platform. Which approach should they use?

- A. Use regional managed instance groups and a global load balancer to increase performance because the regional managed instance group can grow instances in each region separately based on traffic.
- B. Use a global load balancer with a set of virtual machines that forward the requests to a closer group of virtual machines managed by your operations team.
- C. Use regional managed instance groups and a global load balancer to increase reliability by providing automatic failover between zones in different regions.
- D. Use a global load balancer with a set of virtual machines that forward the requests to a closer group of virtual machines as part of a separate managed instance groups.

Answer: A

NEW QUESTION 9

- (Exam Topic 5)

As part of implementing their disaster recovery plan, your company is trying to replicate their production MySQL database from their private data center to their GCP project using a Google Cloud VPN connection. They are experiencing latency issues and a small amount of packet loss that is disrupting the replication. What should they do?

- A. Configure their replication to use UDP.
- B. Configure a Google Cloud Dedicated Interconnect.
- C. Restore their database daily using Google Cloud SQL.
- D. Add additional VPN connections and load balance them.
- E. Send the replicated transaction to Google Cloud Pub/Sub.

Answer: B

NEW QUESTION 10

- (Exam Topic 5)

Your applications will be writing their logs to BigQuery for analysis. Each application should have its own table.

Any logs older than 45 days should be removed. You want to optimize storage and follow Google recommended practices. What should you do?

- A. Configure the expiration time for your tables at 45 days
- B. Make the tables time-partitioned, and configure the partition expiration at 45 days
- C. Rely on BigQuery's default behavior to prune application logs older than 45 days
- D. Create a script that uses the BigQuery command line tool (bq) to remove records older than 45 days

Answer: B

Explanation:

<https://cloud.google.com/bigquery/docs/managing-partitioned-tables>

NEW QUESTION 10

- (Exam Topic 5)

You have an application deployed on Kubernetes Engine using a Deployment named echo-deployment. The deployment is exposed using a Service called echo-service. You need to perform an update to the application with minimal downtime to the application. What should you do?

- A. Use kubectl set image deployment/echo-deployment <new-image>
- B. Use the rolling update functionality of the Instance Group behind the Kubernetes cluster
- C. Update the deployment yaml file with the new container image
- D. Use kubectl delete deployment/ echo-deployment and kubectl create -f <yaml-file>
- E. Update the service yaml file with the new container image
- F. Use kubectl delete service/echoservice and kubectl create -f <yaml-file>

Answer: A

Explanation:

https://cloud.google.com/kubernetes-engine/docs/how-to/updating-apps#updating_an_application

NEW QUESTION 13

- (Exam Topic 5)

You deploy your custom Java application to Google App Engine. It fails to deploy and gives you the following stack trace.

```
java.lang.SecurityException: SHA1 digest error for
com/Altostrat/CloakedServlet.class
    at com.google.appengine.runtime.Request.process
-d36f818a24b8cf1d (Request.java)
    at
sun.security.util.ManifestEntryVerifier.verify
(ManifestEntryVerifier.java:210)
    at java.util.jar.JarVerifier.processEntry
(JarVerifier.java:218)
    at java.util.jar.JarVerifier.update
(JarVerifier.java:205)
    at
java.util.jar.JarVerifiersVerifierStream.read
(JarVerifier.java:428)
    at sun.misc.Resource.getBytes
(Resource.java:124)
    at java.net.URL.ClassLoader.defineClass
(URLClassLoader.java:273)
    at sun.reflect.GeneratedMethodAccessor5.invoke
(Unknown Source)
    at
sun.reflect.DelegatingMethodAccessorImpl.invoke
(DelegatingMethodAccessorImpl.java:43)
    at java.lang.reflect.Method.invoke
(Method.java:616)
    at java.lang.ClassLoader.loadClass
(ClassLoader.java:266)
```

What should you do?

- A. Upload missing JAR files and redeploy your application.
- B. Digitally sign all of your JAR files and redeploy your application
- C. Recompile the CloakedServlet class using MD5 hash instead of SHA1

Answer: B

NEW QUESTION 16

- (Exam Topic 5)

Your company has just recently activated Cloud Identity to manage users. The Google Cloud Organization has been configured as wed. The security team needs to secure protects that will be part of the Organization. They want to prohibit IAM users outside the domain from gaining permissions from now on. What should they do?

- A. Configure an organization policy to restrict identities by domain
- B. Configure an organization policy to block creation of service accounts
- C. Configure Cloud Scheduler to trigger a Cloud Function every hour that removes all users that don't belong to the Cloud identity domain from all projects.
- D. Create a technical user (e.g. crawler@yourdomain.com), and give it the protect owner role at root organization level Write a bash script that• Lists all the IAM rules of all projects within the organization• Deletes all users that do not belong to the company domainCreate a Compute Engine instance in a project within the

Organization and configure gcloud to be executed with technical user credentials Configure a cron job that executes the bash script every hour.

Answer: A

NEW QUESTION 19

- (Exam Topic 5)

Your company has multiple on-premises systems that serve as sources for reporting. The data has not been maintained well and has become degraded over time. You want to use Google-recommended practices to detect anomalies in your company data. What should you do?

- A. Upload your files into Cloud Storag
- B. Use Cloud Datalab to explore and clean your data.
- C. Upload your files into Cloud Storag
- D. Use Cloud Dataprep to explore and clean your data.
- E. Connect Cloud Datalab to your on-premises system
- F. Use Cloud Datalab to explore and clean your data.
- G. Connect Cloud Dataprep to your on-premises system
- H. Use Cloud Dataprep to explore and clean your data.

Answer: B

Explanation:

<https://cloud.google.com/dataprep/>

NEW QUESTION 21

- (Exam Topic 5)

You team needs to create a Google Kubernetes Engine (GKE) cluster to host a newly built application that requires access to third-party services on the internet. Your company does not allow any Compute Engine instance to have a public IP address on Google Cloud. You need to create a deployment strategy that adheres to these guidelines. What should you do?

- A. Create a Compute Engine instance, and install a NAT Proxy on the instanc
- B. Configure all workloads on GKE to pass through this proxy to access third-party services on the Internet
- C. Configure the GKE cluster as a private cluster, and configure Cloud NAT Gateway for the cluster subnet
- D. Configure the GKE cluster as a route-based cluste
- E. Configure Private Google Access on the Virtual Private Cloud (VPC)
- F. Configure the GKE cluster as a private cluste
- G. Configure Private Google Access on the Virtual Private Cloud (VPC)

Answer: B

Explanation:

A Cloud NAT gateway can perform NAT for nodes and Pods in a private cluster, which is a type of VPC-native cluster. The Cloud NAT gateway must be configured to apply to at least the following subnet IP address ranges for the subnet that your cluster uses:
Subnet primary IP address range (used by nodes)
Subnet secondary IP address range used for Pods in the cluster Subnet secondary IP address range used for Services in the cluster
The simplest way to provide NAT for an entire private cluster is to configure a Cloud NAT gateway to apply to all of the cluster's subnet's IP address ranges.
<https://cloud.google.com/nat/docs/overview>

NEW QUESTION 24

- (Exam Topic 5)

Your company's test suite is a custom C++ application that runs tests throughout each day on Linux virtual machines. The full test suite takes several hours to complete, running on a limited number of on premises servers reserved for testing. Your company wants to move the testing infrastructure to the cloud, to reduce the amount of time it takes to fully test a change to the system, while changing the tests as little as possible. Which cloud infrastructure should you recommend?

- A. Google Compute Engine unmanaged instance groups and Network Load Balancer
- B. Google Compute Engine managed instance groups with auto-scaling
- C. Google Cloud Dataproc to run Apache Hadoop jobs to process each test
- D. Google App Engine with Google Stackdriver for logging

Answer: B

Explanation:

<https://cloud.google.com/compute/docs/instance-groups/>

Google Compute Engine enables users to launch virtual machines (VMs) on demand. VMs can be launched from the standard images or custom images created by users.

Managed instance groups offer autoscaling capabilities that allow you to automatically add or remove instances from a managed instance group based on increases or decreases in load. Autoscaling helps your applications gracefully handle increases in traffic and reduces cost when the need for resources is lower.

NEW QUESTION 29

- (Exam Topic 5)

Your application needs to process credit card transactions. You want the smallest scope of Payment Card Industry (PCI) compliance without compromising the ability to analyze transactional data and trends relating to which payment methods are used. How should you design your architecture?

- A. Create a tokenizer service and store only tokenized data.
- B. Create separate projects that only process credit card data.
- C. Create separate subnetworks and isolate the components that process credit card data.
- D. Streamline the audit discovery phase by labeling all of the virtual machines (VMs) that process PCI data.
- E. Enable Logging export to Google BigQuery and use ACLs and views to scope the data shared with the auditor.

Answer: A

Explanation:

<https://cloud.google.com/solutions/pci-dss-compliance-in-gcp>

NEW QUESTION 33

- (Exam Topic 5)

Your company is moving 75 TB of data into Google Cloud. You want to use Cloud Storage and follow Google recommended practices. What should you do?

- A. Move your data onto a Transfer Appliance
- B. Use a Transfer Appliance Rehydrator to decrypt the data into Cloud Storage.
- C. Move your data onto a Transfer Appliance
- D. Use Cloud Dataprep to decrypt the data into Cloud Storage.
- E. Install gsutil on each server that contains data
- F. Use resumable transfers to upload the data into Cloud Storage.
- G. Install gsutil on each server containing data
- H. Use streaming transfers to upload the data into Cloud Storage.

Answer: A

Explanation:

<https://cloud.google.com/transfer-appliance/docs/2.0/faq>

NEW QUESTION 34

- (Exam Topic 5)

Your company uses the Firewall Insights feature in the Google Network Intelligence Center. You have several firewall rules applied to Compute Engine instances. You need to evaluate the efficiency of the applied firewall ruleset. When you bring up the Firewall Insights page in the Google Cloud Console, you notice that there are no log rows to display. What should you do to troubleshoot the issue?

- A. Enable Virtual Private Cloud (VPC) flow logging.
- B. Enable Firewall Rules Logging for the firewall rules you want to monitor.
- C. Verify that your user account is assigned the compute.networkAdmin Identity and Access Management (IAM) role.
- D. Install the Google Cloud SDK, and verify that there are no Firewall logs in the command line output.

Answer: B

Explanation:

Reference: <https://cloud.google.com/network-intelligence-center/docs/firewall-insights/how-to/using-firewall-insights>

NEW QUESTION 35

- (Exam Topic 5)

You are designing a Data Warehouse on Google Cloud and want to store sensitive data in BigQuery. Your company requires you to generate encryption keys outside of Google Cloud. You need to implement a solution. What should you do?

- A. Generate a new key in Cloud Key Management Service (Cloud KMS). Store all data in Cloud Storage using the customer-managed key option and select the created key
- B. Set up a Dataflow pipeline to decrypt the data and to store it in a BigQuery dataset.
- C. Generate a new key in Cloud Key Management Service (Cloud KMS). Create a dataset in BigQuery using the customer-managed key option and select the created key
- D. Import a key in Cloud KMS
- E. Store all data in Cloud Storage using the customer-managed key option and select the created key
- F. Set up a Dataflow pipeline to decrypt the data and to store it in a new BigQuery dataset.
- G. Import a key in Cloud KMS
- H. Create a dataset in BigQuery using the customer-supplied key option and select the created key.

Answer: D

Explanation:

<https://cloud.google.com/bigquery/docs/customer-managed-encryption>

NEW QUESTION 40

- (Exam Topic 5)

You are designing an application for use only during business hours. For the minimum viable product release, you'd like to use a managed product that automatically "scales to zero" so you don't incur costs when there is no activity. Which primary compute resource should you choose?

- A. Cloud Functions
- B. Compute Engine
- C. Kubernetes Engine
- D. AppEngine flexible environment

Answer: A

Explanation:

<https://cloud.google.com/serverless-options>

NEW QUESTION 43

- (Exam Topic 5)

You need to develop procedures to test a disaster plan for a mission-critical application. You want to use Google-recommended practices and native capabilities

within GCP.
What should you do?

- A. Use Deployment Manager to automate service provisionin
- B. Use Activity Logs to monitor and debug your tests.
- C. Use Deployment Manager to automate provisionin
- D. Use Stackdriver to monitor and debug your tests.
- E. Use gcloud scripts to automate service provisionin
- F. Use Activity Logs monitor and debug your tests.
- G. Use automated scripts to automate service provisionin
- H. Use Activity Logs monitor and debug your tests.

Answer: B

Explanation:

<https://cloud.google.com/solutions/dr-scenarios-planning-guide>

NEW QUESTION 47

- (Exam Topic 5)

Your architecture calls for the centralized collection of all admin activity and VM system logs within your project. How should you collect these logs from both VMs and services?

- A. All admin and VM system logs are automatically collected by Stackdriver.
- B. Stackdriver automatically collects admin activity logs for most service
- C. The Stackdriver Logging agent must be installed on each instance to collect system logs.
- D. Launch a custom syslogd compute instance and configure your GCP project and VMs to forward all logs to it.
- E. Install the Stackdriver Logging agent on a single compute instance and let it collect all audit and access logs for your environment.

Answer: B

Explanation:

<https://cloud.google.com/logging/docs/agent/default-logs>

NEW QUESTION 52

- (Exam Topic 5)

Your company sends all Google Cloud logs to Cloud Logging. Your security team wants to monitor the logs. You want to ensure that the security team can react quickly if an anomaly such as an unwanted firewall change or server breach is detected. You want to follow Google-recommended practices. What should you do?

- A. Schedule a cron job with Cloud Schedule
- B. The scheduled job queries the logs every minute for the relevant events.
- C. Export logs to BigQuery, and trigger a query in BigQuery to process the log data for the relevant events.
- D. Export logs to a Pub/Sub topic, and trigger Cloud Function with the relevant log events.
- E. Export logs to a Cloud Storage bucket, and trigger Cloud Run with the relevant log events.

Answer: C

Explanation:

<https://cloud.google.com/blog/products/management-tools/automate-your-response-to-a-cloud-logging-event>

NEW QUESTION 56

- (Exam Topic 5)

Your company has a Google Cloud project that uses BigQuery for data warehousing They have a VPN tunnel between the on-premises environment and Google Cloud that is configured with Cloud VPN. The security team wants to avoid data exfiltration by malicious insiders, compromised code, and accidental oversharing. What should they do?

- A. Configure Private Google Access for on-premises only.
- B. Perform the following tasks:1) Create a service account.2) Give the BigQuery JobUser role and Storage Reader role to the service account.3) Remove all other IAM access from the project.
- C. Configure VPC Service Controls and configure Private Google Access.
- D. Configure Private Google Access.

Answer: C

Explanation:

<https://cloud.google.com/vpc-service-controls/docs/overview>

VPC Service Controls improves your ability to mitigate the risk of data exfiltration from Google Cloud services such as Cloud Storage and BigQuery.

NEW QUESTION 61

- (Exam Topic 5)

Your company is using Google Cloud. You have two folders under the Organization: Finance and Shopping. The members of the development team are in a Google Group. The development team group has been assigned the Project Owner role on the Organization. You want to prevent the development team from creating resources in projects in the Finance folder. What should you do?

- A. Assign the development team group the Project Viewer role on the Finance folder, and assign the development team group the Project Owner role on the Shopping folder.
- B. Assign the development team group only the Project Viewer role on the Finance folder.
- C. Assign the development team group the Project Owner role on the Shopping folder, and remove the development team group Project Owner role from the Organization.
- D. Assign the development team group only the Project Owner role on the Shopping folder.

Answer: C

Explanation:

<https://cloud.google.com/resource-manager/docs/cloud-platform-resource-hierarchy>

"Roles are always inherited, and there is no way to explicitly remove a permission for a lower-level resource that is granted at a higher level in the resource hierarchy. Given the above example, even if you were to remove the Project Editor role from Bob on the "Test GCP Project", he would still inherit that role from the "Dept Y" folder, so he would still have the permissions for that role on "Test GCP Project"."

Reference: <https://cloud.google.com/resource-manager/docs/creating-managing-folders>

NEW QUESTION 63

- (Exam Topic 5)

Your company is migrating its on-premises data center into the cloud. As part of the migration, you want to integrate Kubernetes Engine for workload orchestration. Parts of your architecture must also be PCI DSScompliant.

Which of the following is most accurate?

- A. App Engine is the only compute platform on GCP that is certified for PCI DSS hosting.
- B. Kubernetes Engine cannot be used under PCI DSS because it is considered shared hosting.
- C. Kubernetes Engine and GCP provide the tools you need to build a PCI DSS-compliant environment.
- D. All Google Cloud services are usable because Google Cloud Platform is certified PCI-compliant.

Answer: D

Explanation:

<https://cloud.google.com/security/compliance/pci-dss>

NEW QUESTION 65

- (Exam Topic 5)

Your company has an application running on Google Cloud that is collecting data from thousands of physical devices that are globally distributed. Data is publish to Pub/Sub and streamed in real time into an SSO Cloud Bigtable cluster via a Dataflow pipeline. The operations team informs you that your Cloud Bigtable cluster has a hot-spot and queries are taking longer man expected You need to resolve the problem and prevent it from happening in the future What should you do?

- A. Advise your clients to use HBase APIs instead of NodeJS APIs.
- B. Review your RowKey strategy and ensure that keys are evenly spread across the alphabet.
- C. Delete records older than 30 days.
- D. Double the number of nodes you currently have.

Answer: B

NEW QUESTION 69

- (Exam Topic 5)

You have an application that makes HTTP requests to Cloud Storage. Occasionally the requests fail with HTTP status codes of 5xx and 429. How should you handle these types of errors?

- A. Use gRPC instead of HTTP for better performance.
- B. Implement retry logic using a truncated exponential backoff strategy.
- C. Make sure the Cloud Storage bucket is multi-regional for geo-redundancy.
- D. Monitor <https://status.cloud.google.com/feed.atom> and only make requests if Cloud Storage is not reporting an incident.

Answer: A

Explanation:

Reference https://cloud.google.com/storage/docs/json_api/v1/status-codes

NEW QUESTION 70

- (Exam Topic 5)

Your company plans to migrate a multi-petabyte data set to the cloud. The data set must be available 24hrs a day. Your business analysts have experience only with using a SQL interface. How should you store the data to optimize it for ease of analysis?

- A. Load data into Google BigQuery.
- B. Insert data into Google Cloud SQL.
- C. Put flat files into Google Cloud Storage.
- D. Stream data into Google Cloud Datastore.

Answer: A

Explanation:

Google Big Query is for multi peta byte storage , HA(High availability) which means 24 hours, SQL interface.

<https://medium.com/google-cloud/the-12-components-of-google-bigquery-c2b49829a7c7> <https://cloud.google.com/solutions/bigquery-data-warehouse>

<https://cloud.google.com/bigquery/>

BigQuery is Google's serverless, highly scalable, low cost enterprise data warehouse designed to make all your data analysts productive. Because there is no infrastructure to manage, you can focus on analyzing data to find meaningful insights using familiar SQL and you don't need a database administrator.

BigQuery enables you to analyze all your data by creating a logical data warehouse over managed, columnar storage as well as data from object storage, and spreadsheets.

References: <https://cloud.google.com/bigquery/>

NEW QUESTION 71

- (Exam Topic 5)

Your organization has decided to restrict the use of external IP addresses on instances to only approved instances. You want to enforce this requirement across all of your Virtual Private Clouds (VPCs). What should you do?

- A. Remove the default route on all VPC
- B. Move all approved instances into a new subnet that has a default route to an internet gateway.
- C. Create a new VPC in custom mode
- D. Create a new subnet for the approved instances, and set a default route to the internet gateway on this new subnet.
- E. Implement a Cloud NAT solution to remove the need for external IP addresses entirely.
- F. Set an Organization Policy with a constraint on constraints/compute.vmExternalIpAccess
- G. List the approved instances in the allowedValues list.

Answer: D

Explanation:

Reference: <https://cloud.google.com/compute/docs/ip-addresses/reserve-static-external-ip-address> <https://cloud.google.com/compute/docs/ip-addresses/reserve-static-external-ip-address#disableexternalip>

you might want to restrict external IP address so that only specific VM instances can use them. This option can help to prevent data exfiltration or maintain network isolation. Using an Organization Policy, you can restrict external IP addresses to specific VM instances with constraints to control use of external IP addresses for your VM instances within an organization or a project.

NEW QUESTION 72

- (Exam Topic 5)

Your operations team currently stores 10 TB of data in an object storage service from a third-party provider. They want to move this data to a Cloud Storage bucket as quickly as possible, following Google-recommended practices. They want to minimize the cost of this data migration. Which approach should they use?

- A. Use the `gsutil mv` command to move the data
- B. Use the Storage Transfer Service to move the data
- C. Download the data to a Transfer Appliance and ship it to Google
- D. Download the data to the on-premises data center and upload it to the Cloud Storage bucket

Answer: B

Explanation:

<https://cloud.google.com/architecture/migration-to-google-cloud-transferring-your-large-datasets#transfer-options> <https://cloud.google.com/storage-transfer-service>

NEW QUESTION 75

- (Exam Topic 5)

Your company has just recently activated Cloud Identity to manage users. The Google Cloud Organization has been configured as well. The security team needs to secure projects that will be part of the Organization. They want to prohibit IAM users outside the domain from gaining permissions from now on. What should they do?

- A. Configure an organization policy to restrict identities by domain
- B. Configure an organization policy to block creation of service accounts
- C. Configure Cloud Scheduler to trigger a Cloud Function every hour that removes all users that don't belong to the Cloud identity domain from all projects.

Answer: A

NEW QUESTION 78

- (Exam Topic 5)

Your company is planning to upload several important files to Cloud Storage. After the upload is completed, they want to verify that the upload content is identical to what they have on-premises. You want to minimize the cost and effort of performing this check. What should you do?

- A. 1) Use `gsutil -m` to upload all the files to Cloud Storage. 2) Use `gsutil cp` to download the uploaded files. 3) Use Linux `diff` to compare the content of the files
- B. 1) Use `gsutil -m` to upload all the files to Cloud Storage. 2) Develop a custom Java application that computes CRC32C hashes. 3) Use `gsutil ls -L gs://[YOUR_BUCKET_NAME]` to collect CRC32C hashes of the uploaded files. 4) Compare the hashes
- C. 1) Use Linux `shasum` to compute a digest of files you want to upload. 2) Use `gsutil -m` to upload all the files to the Cloud Storage. 3) Use `gsutil cp` to download the uploaded files. 4) Use Linux `shasum` to compute a digest of the downloaded files. 5) Compare the hashes
- D. 1) Use `gsutil -m` to upload all the files to Cloud Storage. 2) Use `gsutil hash -c FILE_NAME` to generate CRC32C hashes of all on-premises files. 3) Use `gsutil ls -L gs://[YOUR_BUCKET_NAME]` to collect CRC32C hashes of the uploaded files. 4) Compare the hashes

Answer: D

Explanation:

<https://cloud.google.com/storage/docs/gsutil/commands/hash>

NEW QUESTION 83

- (Exam Topic 5)

Your company wants to track whether someone is present in a meeting room reserved for a scheduled meeting. There are 1000 meeting rooms across 5 offices on 3 continents. Each room is equipped with a motion sensor that reports its status every second. The data from the motion detector includes only a sensor ID and several different discrete items of information. Analysts will use this data, together with information about account owners and office locations. Which database type should you use?

- A. Flat file
- B. NoSQL
- C. Relational
- D. Blobstore

Answer: B

Explanation:

Relational databases were not designed to cope with the scale and agility challenges that face modern applications, nor were they built to take advantage of the commodity storage and processing power available today.

NoSQL fits well for:

_ Developers are working with applications that create massive volumes of new, rapidly changing data types — structured, semi-structured, unstructured and polymorphic data.

NEW QUESTION 87

- (Exam Topic 5)

An application development team has come to you for advice. They are planning to write and deploy an HTTP(S) API using Go 1.12. The API will have a very unpredictable workload and must remain reliable during peaks in traffic. They want to minimize operational overhead for this application. What approach should you recommend?

- A. Use a Managed Instance Group when deploying to Compute Engine
- B. Develop an application with containers, and deploy to Google Kubernetes Engine (GKE)
- C. Develop the application for App Engine standard environment
- D. Develop the application for App Engine Flexible environment using a custom runtime

Answer: C

Explanation:

<https://cloud.google.com/appengine/docs/the-appengine-environments>

NEW QUESTION 92

- (Exam Topic 5)

You need to design a solution for global load balancing based on the URL path being requested. You need to ensure operations reliability and end-to-end in-transit encryption based on Google best practices.

What should you do?

- A. Create a cross-region load balancer with URL Maps.
- B. Create an HTTPS load balancer with URL maps.
- C. Create appropriate instance groups and instance
- D. Configure SSL proxy load balancing.
- E. Create a global forwarding rule
- F. Configure SSL proxy balancing.

Answer: B

Explanation:

Reference <https://cloud.google.com/load-balancing/docs/https/url-map>

NEW QUESTION 93

- (Exam Topic 5)

The application reliability team at your company has added a debug feature to their backend service to send all server events to Google Cloud Storage for eventual analysis. The event records are at least 50 KB and at most 15 MB and are expected to peak at 3,000 events per second. You want to minimize data loss. Which process should you implement?

- A. • Append metadata to file body. • Compress individual files. • Name files with serverName-Timestamp. • Create a new bucket if bucket is older than 1 hour and save individual files to the new bucket
- B. Otherwise, save files to existing bucket
- C. • Batch every 10,000 events with a single manifest file for metadata. • Compress event files and manifest file into a single archive file. • Name files using serverName-EventSequence. • Create a new bucket if bucket is older than 1 day and save the single archive file to the new bucket
- D. Otherwise, save the single archive file to existing bucket.
- E. • Compress individual files. • Name files with serverName-EventSequence. • Save files to one bucket • Set custom metadata headers for each object after saving.
- F. • Append metadata to file body. • Compress individual files. • Name files with a random prefix pattern. • Save files to one bucket

Answer: D

Explanation:

In order to maintain a high request rate, avoid using sequential names. Using completely random object names will give you the best load distribution. Randomness after a common prefix is effective under the prefix <https://cloud.google.com/storage/docs/request-rate>

NEW QUESTION 97

- (Exam Topic 5)

Your company has announced that they will be outsourcing operations functions. You want to allow developers to easily stage new versions of a cloud-based application in the production environment and allow the outsourced operations team to autonomously promote staged versions to production. You want to minimize the operational overhead of the solution. Which Google Cloud product should you migrate to?

- A. App Engine
- B. GKE On-Prem
- C. Compute Engine
- D. Google Kubernetes Engine

Answer: D

Explanation:

Reference: <https://cloud.google.com/security/compliance/eba-outsourcing-mapping-gcp>

NEW QUESTION 99

- (Exam Topic 5)

You are working at a sports association whose members range in age from 8 to 30. The association collects a large amount of health data, such as sustained injuries. You are storing this data in BigQuery. Current legislation requires you to delete such information upon request of the subject. You want to design a solution that can accommodate such a request. What should you do?

- A. Use a unique identifier for each individual
- B. Upon a deletion request, delete all rows from BigQuery with this identifier.
- C. When ingesting new data in BigQuery, run the data through the Data Loss Prevention (DLP) API to identify any personal information
- D. As part of the DLP scan, save the result to Data Catalog
- E. Upon a deletion request, query Data Catalog to find the column with personal information.
- F. Create a BigQuery view over the table that contains all data
- G. Upon a deletion request, exclude the rows that affect the subject's data from this view
- H. Use this view instead of the source table for all analysis tasks.
- I. Use a unique identifier for each individual
- J. Upon a deletion request, overwrite the column with the unique identifier with a salted SHA256 of its value.

Answer: B

Explanation:

Current legislation requires you to delete "SUCH" information upon request of the subject. " So from that point of view the question is not to delete the entire user records but specific data related to personal health data. With DLP you can use InfoTypes and InfoType detectors to specifically scan for those entries and how to act upon them (link <https://cloud.google.com/dlp/docs/concepts-infotypes>)
<https://cloud.google.com/dlp#section-6>

NEW QUESTION 100

- (Exam Topic 5)

Your company has a support ticketing solution that uses App Engine Standard. The project that contains the App Engine application already has a Virtual Private Cloud(VPC) network fully connected to the company's on-premises environment through a Cloud VPN tunnel. You want to enable App Engine application to communicate with a database that is running in the company's on-premises environment. What should you do?

- A. Configure private services access
- B. Configure private Google access for on-premises hosts only
- C. Configure serverless VPC access
- D. Configure private Google access

Answer: C

Explanation:

<https://cloud.google.com/appengine/docs/standard/python3/connecting-vpc> https://cloud.google.com/appengine/docs/flexible/python/using-third-party-databases#on_premises

NEW QUESTION 103

- (Exam Topic 5)

You need to develop procedures to verify resilience of disaster recovery for remote recovery using GCP. Your production environment is hosted on-premises. You need to establish a secure, redundant connection between your on-premises network and the GCP network. What should you do?

- A. Verify that Dedicated Interconnect can replicate files to GC
- B. Verify that direct peering can establish a secure connection between your networks if Dedicated Interconnect fails.
- C. Verify that Dedicated Interconnect can replicate files to GC
- D. Verify that Cloud VPN can establish a secure connection between your networks if Dedicated Interconnect fails.
- E. Verify that the Transfer Appliance can replicate files to GC
- F. Verify that direct peering can establish a secure connection between your networks if the Transfer Appliance fails.
- G. Verify that the Transfer Appliance can replicate files to GC
- H. Verify that Cloud VPN can establish a secure connection between your networks if the Transfer Appliance fails.

Answer: B

Explanation:

<https://cloud.google.com/interconnect/docs/how-to/direct-peering>

NEW QUESTION 108

- (Exam Topic 5)

You have deployed several instances on Compute Engine. As a security requirement, instances cannot have a public IP address. There is no VPN connection between Google Cloud and your office, and you need to connect via SSH into a specific machine without violating the security requirements. What should you do?

- A. Configure Cloud NAT on the subnet where the instance is hosted
- B. Create an SSH connection to the Cloud NAT IP address to reach the instance.
- C. Add all instances to an unmanaged instance group
- D. Configure TCP Proxy Load Balancing with the instance group as a backend
- E. Connect to the instance using the TCP Proxy IP.
- F. Configure Identity-Aware Proxy (IAP) for the instance and ensure that you have the role of IAP-secured Tunnel User
- G. Use the gcloud command line tool to ssh into the instance.
- H. Create a bastion host in the network to SSH into the bastion host from your office location
- I. From the bastion host, SSH into the desired instance.

Answer: C

Explanation:

https://cloud.google.com/iap/docs/using-tcp-forwarding#tunneling_with_ssh

Leveraging the BeyondCorp security model. "This January, we enhanced context-aware access capabilities in Cloud Identity-Aware Proxy (IAP) to help you protect SSH and RDP access to your virtual machines (VMs)—without needing to provide your VMs with public IP addresses, and without having to set up bastion hosts. "

<https://cloud.google.com/blog/products/identity-security/cloud-iap-enables-context-aware-access-to-vms-via-ssh>

Reference: <https://cloud.google.com/solutions/connecting-securely>

NEW QUESTION 109

- (Exam Topic 5)

You want to store critical business information in Cloud Storage buckets. The information is regularly changed but previous versions need to be referenced on a regular basis. You want to ensure that there is a record of all changes to any information in these buckets. You want to ensure that accidental edits or deletions can be easily rolled back. Which feature should you enable?

- A. Bucket Lock
- B. Object Versioning
- C. Object change notification
- D. Object Lifecycle Management

Answer: B

NEW QUESTION 112

- (Exam Topic 5)

You are deploying an application on App Engine that needs to integrate with an on-premises database. For security purposes, your on-premises database must not be accessible through the public Internet. What should you do?

- A. Deploy your application on App Engine standard environment and use App Engine firewall rules to limit access to the open on-premises database.
- B. Deploy your application on App Engine standard environment and use Cloud VPN to limit access to the on-premises database.
- C. Deploy your application on App Engine flexible environment and use App Engine firewall rules to limit access to the on-premises database.
- D. Deploy your application on App Engine flexible environment and use Cloud VPN to limit access to the on-premises database.

Answer: D

Explanation:

<https://cloud.google.com/appengine/docs/flexible/python/using-third-party-databases>

NEW QUESTION 117

- (Exam Topic 5)

You are moving an application that uses MySQL from on-premises to Google Cloud. The application will run on Compute Engine and will use Cloud SQL. You want to cut over to the Compute Engine deployment of the application with minimal downtime and no data loss to your customers. You want to migrate the application with minimal modification. You also need to determine the cutover strategy. What should you do?

- A. * 1. Set up Cloud VPN to provide private network connectivity between the Compute Engine application and the on-premises MySQL server.* 2. Stop the on-premises application.* 3. Create a mysqldump of the on-premises MySQL server
- B. * 4. Upload the dump to a Cloud Storage bucket.* 5. Import the dump into Cloud SQL.* 6. Modify the source code of the application to write queries to both databases and read from its local database.* 7. Start the Compute Engine application
- C. 8. Stop the on-premises application.
- D. * 1. Set up Cloud SQL proxy and MySQL proxy.* 2. Create a mysqldump of the on-premises MySQL server
- E. * 3. Upload the dump to a Cloud Storage bucket.* 4. Import the dump into Cloud SQL
- F. * 5. Stop the on-premises application
- G. * 6. Start the Compute Engine application.
- H. * 1. Set up Cloud VPN to provide private network connectivity between the Compute Engine application and the on-premises MySQL server
- I. * 2. Stop the on-premises application.* 3. Start the Compute Engine application, configured to read and write to the on-premises MySQL server
- J. * 4. Create the replication configuration in Cloud SQL.* 5. Configure the source database server to accept connections from the Cloud SQL replica
- K. * 6. Finalize the Cloud SQL replica configuration.* 7. When replication has been completed, stop the Compute Engine application
- L. * 8. Promote the Cloud SQL replica to a standalone instance.* 9. Restart the Compute Engine application, configured to read and write to the Cloud SQL standalone instance.
- M. * 1. Stop the on-premises application.* 2. Create a mysqldump of the on-premises MySQL server
- N. * 3. Upload the dump to a Cloud Storage bucket.* 4. Import the dump into Cloud SQL.* 5. Start the application on Compute Engine.

Answer: C

Explanation:

External replica promotion migration In the migration strategy of external replica promotion, you create an external database replica and synchronize the existing data to that replica. This can happen with minimal downtime to the existing database. When you have a replica database, the two databases have different roles that are referred to in this document as primary and replica. After the data is synchronized, you promote the replica to be the primary in order to move the management layer with minimal impact to database uptime. In Cloud SQL, an easy way to accomplish the external replica promotion is to use the automated migration workflow. This process automates many of the steps that are needed for this type of migration.

<https://cloud.google.com/architecture/migrating-mysql-to-cloudsql-concept>

- The best option for migrating your MySQL database is to use an external replica promotion. In this strategy, you create a replica database and set your existing database as the primary. You wait until the two databases are in sync, and you then promote your MySQL replica database to be the primary. This process minimizes database downtime related to the database migration. https://cloud.google.com/architecture/migrating-mysql-to-cloudsql-concept#external_replica_promotion_migrat

NEW QUESTION 121

- (Exam Topic 5)

You want to establish a Compute Engine application in a single VPC across two regions. The application must communicate over VPN to an on-premises network. How should you deploy the VPN?

- A. Use VPC Network Peering between the VPC and the on-premises network.

- (Exam Topic 5)

You want to optimize the performance of an accurate, real-time, weather-charting application. The data comes from 50,000 sensors sending 10 readings a second, in the format of a timestamp and sensor reading. Where should you store the data?

- A. Google BigQuery
- B. Google Cloud SQL
- C. Google Cloud Bigtable
- D. Google Cloud Storage

Answer: C

Explanation:

It is time-series data, So Big Table. <https://cloud.google.com/bigtable/docs/schema-design-time-series>

Google Cloud Bigtable is a scalable, fully-managed NoSQL wide-column database that is suitable for both real-time access and analytics workloads.

Good for:

- Low-latency read/write access
- High-throughput analytics
- Native time series support
- Common workloads:
- IoT, finance, adtech
- Personalization, recommendations
- Monitoring
- Geospatial datasets
- Graphs

References: <https://cloud.google.com/storage-options/>

NEW QUESTION 140

- (Exam Topic 5)

Your company is designing its application landscape on Compute Engine. Whenever a zonal outage occurs, the application should be restored in another zone as quickly as possible with the latest application data. You need to design the solution to meet this requirement. What should you do?

- A. Create a snapshot schedule for the disk containing the application dat
- B. Whenever a zonal outage occurs, use the latest snapshot to restore the disk in the same zone.
- C. Configure the Compute Engine instances with an instance template for the application, and use a regional persistent disk for the application dat
- D. Whenever a zonal outage occurs, use the instance template to spin up the application in another zone in the same regio
- E. Use the regional persistent disk for the application data.
- F. Create a snapshot schedule for the disk containing the application dat
- G. Whenever a zonal outage occurs, use the latest snapshot to restore the disk in another zone within the same region.
- H. Configure the Compute Engine instances with an instance template for the application, and use a regional persistent disk for the application dat
- I. Whenever a zonal outage occurs, use the instance template to spin up the application in another regio
- J. Use the regional persistent disk for the application data,

Answer: B

Explanation:

Regional persistent disk is a storage option that provides synchronous replication of data between two zones in a region. Regional persistent disks can be a good building block to use when you implement HA services in Compute Engine. <https://cloud.google.com/compute/docs/disks/high-availability-regional-persistent-disk>

NEW QUESTION 143

- (Exam Topic 6)

For this question, refer to the Dress4Win case study. Which of the compute services should be migrated as –is and would still be an optimized architecture for performance in the cloud?

- A. Web applications deployed using App Engine standard environment
- B. RabbitMQ deployed using an unmanaged instance group
- C. Hadoop/Spark deployed using Cloud Dataproc Regional in High Availability mode
- D. Jenkins, monitoring, bastion hosts, security scanners services deployed on custom machine types

Answer: C

NEW QUESTION 148

- (Exam Topic 7)

For this question, refer to the TerramEarth case study. TerramEarth has decided to store data files in Cloud Storage. You need to configure Cloud Storage lifecycle rule to store 1 year of data and minimize file storage cost.

Which two actions should you take?

- A. Create a Cloud Storage lifecycle rule with Age: “30”, Storage Class: “Standard”, and Action: “Set to Coldline”, and create a second GCS life-cycle rule with Age: “365”, Storage Class: “Coldline”, and Action: “Delete”.
- B. Create a Cloud Storage lifecycle rule with Age: “30”, Storage Class: “Coldline”, and Action: “Set to Nearline”, and create a second GCS life-cycle rule with Age: “91”, Storage Class: “Coldline”, and Action: “Set to Nearline”.
- C. Create a Cloud Storage lifecycle rule with Age: “90”, Storage Class: “Standard”, and Action: “Set to Nearline”, and create a second GCS life-cycle rule with Age: “91”, Storage Class: “Nearline”, and Action: “Set to Coldline”.
- D. Create a Cloud Storage lifecycle rule with Age: “30”, Storage Class: “Standard”, and Action: “Set to Coldline”, and create a second GCS life-cycle rule with Age: “365”, Storage Class: “Nearline”, and Action: “Delete”.

Answer: A

NEW QUESTION 150

- (Exam Topic 7)

For this question, refer to the TerramEarth case study. You are asked to design a new architecture for the ingestion of the data of the 200,000 vehicles that are connected to a cellular network. You want to follow Google-recommended practices.

Considering the technical requirements, which components should you use for the ingestion of the data?

- A. Google Kubernetes Engine with an SSL Ingress
- B. Cloud IoT Core with public/private key pairs
- C. Compute Engine with project-wide SSH keys
- D. Compute Engine with specific SSH keys

Answer: A

Explanation:

<https://cloud.google.com/solutions/iot-overview> <https://cloud.google.com/iot/quotas>

NEW QUESTION 154

- (Exam Topic 8)

For this question, refer to the Mountkirk Games case study. You are in charge of the new Game Backend Platform architecture. The game communicates with the backend over a REST API.

You want to follow Google-recommended practices. How should you design the backend?

- A. Create an instance template for the backen
- B. For every region, deploy it on a multi-zone managed instance grou
- C. Use an L4 load balancer.
- D. Create an instance template for the backen
- E. For every region, deploy it on a single-zone managed instance grou
- F. Use an L4 load balancer.
- G. Create an instance template for the backen
- H. For every region, deploy it on a multi-zone managed instance grou
- I. Use an L7 load balancer.
- J. Create an instance template for the backen
- K. For every region, deploy it on a single-zone managed instance grou
- L. Use an L7 load balancer.

Answer: C

Explanation:

https://cloud.google.com/solutions/gaming/cloud-game-infrastructure#dedicated_game_server

NEW QUESTION 157

- (Exam Topic 8)

For this question, refer to the Mountkirk Games case study. Which managed storage option meets Mountkirk's technical requirement for storing game activity in a time series database service?

- A. Cloud Bigtable
- B. Cloud Spanner
- C. BigQuery
- D. Cloud Datastore

Answer: A

Explanation:

<https://cloud.google.com/blog/products/databases/getting-started-with-time-series-trend-predictions-using-gcp>

NEW QUESTION 160

- (Exam Topic 8)

For this question, refer to the Mountkirk Games case study. Mountkirk Games wants you to design a way to test the analytics platform's resilience to changes in mobile network latency. What should you do?

- A. Deploy failure injection software to the game analytics platform that can inject additional latency to mobile client analytics traffic.
- B. Build a test client that can be run from a mobile phone emulator on a Compute Engine virtual machine, and run multiple copies in Google Cloud Platform regions all over the world to generate realistic traffic.
- C. Add the ability to introduce a random amount of delay before beginning to process analytics files uploaded from mobile devices.
- D. Create an opt-in beta of the game that runs on players' mobile devices and collects response times from analytics endpoints running in Google Cloud Platform regions all over the world.

Answer: D

NEW QUESTION 164

- (Exam Topic 8)

Mountkirk Games wants to limit the physical location of resources to their operating Google Cloud regions. What should you do?

- A. Configure an organizational policy which constrains where resources can be deployed.
- B. Configure IAM conditions to limit what resources can be configured.
- C. Configure the quotas for resources in the regions not being used to 0.
- D. Configure a custom alert in Cloud Monitoring so you can disable resources as they are created in other regions.

Answer: A

NEW QUESTION 165

- (Exam Topic 10)

For this question, refer to the EHR Healthcare case study. You are responsible for ensuring that EHR's use of Google Cloud will pass an upcoming privacy compliance audit. What should you do? (Choose two.)

- A. Verify EHR's product usage against the list of compliant products on the Google Cloud compliance page.
- B. Advise EHR to execute a Business Associate Agreement (BAA) with Google Cloud.
- C. Use Firebase Authentication for EHR's user facing applications.
- D. Implement Prometheus to detect and prevent security breaches on EHR's web-based applications.
- E. Use GKE private clusters for all Kubernetes workloads.

Answer: AB

Explanation:

<https://cloud.google.com/security/compliance/hipaa>

NEW QUESTION 170

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

Professional-Cloud-Architect Practice Exam Features:

- * Professional-Cloud-Architect Questions and Answers Updated Frequently
- * Professional-Cloud-Architect Practice Questions Verified by Expert Senior Certified Staff
- * Professional-Cloud-Architect Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * Professional-Cloud-Architect Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The Professional-Cloud-Architect Practice Test Here](#)