

# Google

## Exam Questions Associate-Cloud-Engineer

Google Cloud Certified - Associate Cloud Engineer



#### NEW QUESTION 1

You have created a new project in Google Cloud through the gcloud command line interface (CLI) and linked a billing account. You need to create a new Compute Engine instance using the CLI. You need to perform the prerequisite steps. What should you do?

- A. Create a Cloud Monitoring Workspace.
- B. Create a VPC network in the project.
- C. Enable the compute.googleapis.com API.
- D. Grant yourself the IAM role of Computer Admin.

**Answer: C**

#### NEW QUESTION 2

You create a new Google Kubernetes Engine (GKE) cluster and want to make sure that it always runs a supported and stable version of Kubernetes. What should you do?

- A. Enable the Node Auto-Repair feature for your GKE cluster.
- B. Enable the Node Auto-Upgrades feature for your GKE cluster.
- C. Select the latest available cluster version for your GKE cluster.
- D. Select "Container-Optimized OS (cos)" as a node image for your GKE cluster.

**Answer: B**

#### Explanation:

Creating or upgrading a cluster by specifying the version as latest does not provide automatic upgrades. Enable node auto-upgrades to ensure that the nodes in your cluster are up-to-date with the latest stable version.

<https://cloud.google.com/kubernetes-engine/versioning-and-upgrades>

Node auto-upgrades help you keep the nodes in your cluster up to date with the cluster master version when your master is updated on your behalf. When you create a new cluster or node pool with Google Cloud Console or the gcloud command, node auto-upgrade is enabled by default.

Ref: <https://cloud.google.com/kubernetes-engine/docs/how-to/node-auto-upgrades>

#### NEW QUESTION 3

You have developed an application that consists of multiple microservices, with each microservice packaged in its own Docker container image. You want to deploy the entire application on Google Kubernetes Engine so that each microservice can be scaled individually. What should you do?

- A. Create and deploy a Custom Resource Definition per microservice.
- B. Create and deploy a Docker Compose File.
- C. Create and deploy a Job per microservice.
- D. Create and deploy a Deployment per microservice.

**Answer: D**

#### NEW QUESTION 4

You have a single binary application that you want to run on Google Cloud Platform. You decided to automatically scale the application based on underlying infrastructure CPU usage. Your organizational policies require you to use virtual machines directly. You need to ensure that the application scaling is operationally efficient and completed as quickly as possible. What should you do?

- A. Create a Google Kubernetes Engine cluster, and use horizontal pod autoscaling to scale the application.
- B. Create an instance template, and use the template in a managed instance group with autoscaling configured.
- C. Create an instance template, and use the template in a managed instance group that scales up and down based on the time of day.
- D. Use a set of third-party tools to build automation around scaling the application up and down, based on Stackdriver CPU usage monitoring.

**Answer: B**

#### Explanation:

Managed instance groups offer autoscaling capabilities that let you automatically add or delete instances from a managed instance group based on increases or decreases in load (CPU Utilization in this case). Autoscaling helps your apps gracefully handle increases in traffic and reduce costs when the need for resources is lower. You define the autoscaling policy and the autoscaler performs automatic scaling based on the measured load (CPU Utilization in this case). Autoscaling works by adding more instances to your instance group when there is more load (upscaling), and deleting instances when the need for instances is lowered (downscaling). Ref: <https://cloud.google.com/compute/docs/autoscaler>

#### NEW QUESTION 5

You have an object in a Cloud Storage bucket that you want to share with an external company. The object contains sensitive data. You want access to the content to be removed after four hours. The external company does not have a Google account to which you can grant specific user-based access privileges. You want to use the most secure method that requires the fewest steps. What should you do?

- A. Create a signed URL with a four-hour expiration and share the URL with the company.
- B. Set object access to 'public' and use object lifecycle management to remove the object after four hours.
- C. Configure the storage bucket as a static website and furnish the object's URL to the company.
- D. Delete the object from the storage bucket after four hours.
- E. Create a new Cloud Storage bucket specifically for the external company to access.
- F. Copy the object to that bucket.
- G. Delete the bucket after four hours have passed.

**Answer: A**

#### Explanation:

Signed URLs are used to give time-limited resource access to anyone in possession of the URL, regardless of whether they have a Google account.

<https://cloud.google.com/storage/docs/access-control/signed-urls>

#### NEW QUESTION 6

You are creating a Google Kubernetes Engine (GKE) cluster with a cluster autoscaler feature enabled. You need to make sure that each node of the cluster will run a monitoring pod that sends container metrics to a third-party monitoring solution. What should you do?

- A. Deploy the monitoring pod in a StatefulSet object.
- B. Deploy the monitoring pod in a DaemonSet object.
- C. Reference the monitoring pod in a Deployment object.
- D. Reference the monitoring pod in a cluster initializer at the GKE cluster creation time.

**Answer: B**

#### Explanation:

<https://cloud.google.com/kubernetes-engine/docs/concepts/daemonset> [https://cloud.google.com/kubernetes-engine/docs/concepts/daemonset#usage\\_patterns](https://cloud.google.com/kubernetes-engine/docs/concepts/daemonset#usage_patterns)  
DaemonSets attempt to adhere to a one-Pod-per-node model, either across the entire cluster or a subset of nodes. As you add nodes to a node pool, DaemonSets automatically add Pods to the new nodes as needed.

In GKE, DaemonSets manage groups of replicated Pods and adhere to a one-Pod-per-node model, either across the entire cluster or a subset of nodes. As you add nodes to a node pool, DaemonSets automatically add Pods to the new nodes as needed. So, this is a perfect fit for our monitoring pod.

Ref: <https://cloud.google.com/kubernetes-engine/docs/concepts/daemonset>

DaemonSets are useful for deploying ongoing background tasks that you need to run on all or certain nodes, and which do not require user intervention. Examples of such tasks include storage daemons like ceph, log collection daemons like fluentd, and node monitoring daemons like collectd. For example, you could have DaemonSets for each type of daemon run on all of your nodes. Alternatively, you could run multiple DaemonSets for a single type of daemon, but have them use different configurations for different hardware types and resource needs.

#### NEW QUESTION 7

You need to create a copy of a custom Compute Engine virtual machine (VM) to facilitate an expected increase in application traffic due to a business acquisition. What should you do?

- A. Create a Compute Engine snapshot of your base V
- B. Create your images from that snapshot.
- C. Create a Compute Engine snapshot of your base V
- D. Create your instances from that snapshot.
- E. Create a custom Compute Engine image from a snapsho
- F. Create your images from that image.
- G. Create a custom Compute Engine image from a snapsho
- H. Create your instances from that image.

**Answer: D**

#### Explanation:

A custom image belongs only to your project. To create an instance with a custom image, you must first have a custom image.

#### NEW QUESTION 8

You have a developer laptop with the Cloud SDK installed on Ubuntu. The Cloud SDK was installed from the Google Cloud Ubuntu package repository. You want to test your application locally on your laptop with Cloud Datastore. What should you do?

- A. Export Cloud Datastore data using `gcloud datastore export`.
- B. Create a Cloud Datastore index using `gcloud datastore indexes create`.
- C. Install the `google-cloud-sdk-datastore-emulator` component using the `apt get install` command.
- D. Install the `cloud-datastore-emulator` component using the `gcloud components install` command.

**Answer: D**

#### Explanation:

➤ The Datastore emulator provides local emulation of the production Datastore environment. You can use the emulator to develop and test your application locally. Ref: <https://cloud.google.com/datastore/docs/tools/datastore-emulator>

#### NEW QUESTION 9

Your company uses BigQuery for data warehousing. Over time, many different business units in your company have created 1000+ datasets across hundreds of projects. Your CIO wants you to examine all datasets to find tables that contain an `employee_ssn` column. You want to minimize effort in performing this task. What should you do?

- A. Go to Data Catalog and search for `employee_ssn` in the search box.
- B. Write a shell script that uses the `bq` command line tool to loop through all the projects in your organization.
- C. Write a script that loops through all the projects in your organization and runs a query on `INFORMATION_SCHEMA.COLUMNS` view to find the `employee_ssn` column.
- D. Write a Cloud Dataflow job that loops through all the projects in your organization and runs a query on `INFORMATION_SCHEMA.COLUMNS` view to find `employee_ssn` column.

**Answer: A**

#### Explanation:

<https://cloud.google.com/bigquery/docs/quickstarts/quickstart-web-ui?authuser=4>

#### NEW QUESTION 10

You have been asked to create robust Virtual Private Network (VPN) connectivity between a new Virtual Private Cloud (VPC) and a remote site. Key requirements

include dynamic routing, a shared address space of 10.19.0.1/22, and no overprovisioning of tunnels during a failover event. You want to follow Google-recommended practices to set up a high availability Cloud VPN. What should you do?

- A. Use a custom mode VPC network, configure static routes, and use active/passive routing
- B. Use an automatic mode VPC network, configure static routes, and use active/active routing
- C. Use a custom mode VPC network use Cloud Router border gateway protocol (86P) routes, and use active/passive routing
- D. Use an automatic mode VPC network, use Cloud Router border gateway protocol (BGP) routes and configure policy-based routing

**Answer: C**

**Explanation:**

<https://cloud.google.com/network-connectivity/docs/vpn/concepts/best-practices>

**NEW QUESTION 10**

You are deploying a production application on Compute Engine. You want to prevent anyone from accidentally destroying the instance by clicking the wrong button. What should you do?

- A. Disable the flag "Delete boot disk when instance is deleted."
- B. Enable delete protection on the instance.
- C. Disable Automatic restart on the instance.
- D. Enable Preemptibility on the instance.

**Answer: B**

**Explanation:**

**Preventing Accidental VM Deletion** This document describes how to protect specific VM instances from deletion by setting the `deletionProtection` property on an Instance resource. To learn more about VM instances, read the [Instances documentation](#). As part of your workload, there might be certain VM instances that are critical to running your application or services, such as an instance running a SQL server, a server used as a license manager, and so on. These VM instances might need to stay running indefinitely so you need a way to protect these VMs from being deleted. By setting the `deletionProtection` flag, a VM instance can be protected from accidental deletion. If a user attempts to delete a VM instance for which you have set the `deletionProtection` flag, the request fails. Only a user that has been granted a role with `compute.instances.create` permission can reset the flag to allow the resource to be deleted.

<https://cloud.google.com/compute/docs/instances/preventing-accidental-vm-deletion>

**NEW QUESTION 15**

You are creating an application that will run on Google Kubernetes Engine. You have identified MongoDB as the most suitable database system for your application and want to deploy a managed MongoDB environment that provides a support SLA. What should you do?

- A. Create a Cloud Bigtable cluster and use the HBase API
- B. Deploy MongoDB Alias from the Google Cloud Marketplace
- C. Download a MongoDB installation package and run it on Compute Engine instances
- D. Download a MongoDB installation package, and run it on a Managed Instance Group

**Answer: B**

**Explanation:**

<https://console.cloud.google.com/marketplace/details/gc-launcher-for-mongodb-atlas/mongodb-atlas>

**NEW QUESTION 18**

For analysis purposes, you need to send all the logs from all of your Compute Engine instances to a BigQuery dataset called `platform-logs`. You have already installed the Stackdriver Logging agent on all the instances. You want to minimize cost. What should you do?

- A. 1. Give the BigQuery Data Editor role on the `platform-logs` dataset to the service accounts used by your instances.2. Update your instances' metadata to add the following value: `logs-destination:bq://platform-logs`.
- B. 1. In Stackdriver Logging, create a logs export with a Cloud Pub/Sub topic called `logs` as a sink.2.Create a Cloud Function that is triggered by messages in the `logs` topic.3. Configure that Cloud Function to drop logs that are not from Compute Engine and to insert Compute Engine logs in the `platform-logs` dataset.
- C. 1. In Stackdriver Logging, create a filter to view only Compute Engine logs.2. Click Create Export.3.Choose BigQuery as Sink Service, and the `platform-logs` dataset as Sink Destination.
- D. 1. Create a Cloud Function that has the BigQuery User role on the `platform-logs` dataset.2. Configure this Cloud Function to create a BigQuery Job that executes this query:`INSERT INTOdataset.platform-logs (timestamp, log)SELECT timestamp, log FROM compute.logsWHERE timestamp> DATE_SUB(CURRENT_DATE(), INTERVAL 1 DAY)`3. Use Cloud Scheduler to trigger this Cloud Function once a day.

**Answer: C**

**Explanation:**

\* 1. In Stackdriver Logging, create a filter to view only Compute Engine logs. 2. Click Create Export. 3. Choose BigQuery as Sink Service, and the `platform-logs` dataset as Sink Destination.

**NEW QUESTION 20**

You are running a data warehouse on BigQuery. A partner company is offering a recommendation engine based on the data in your data warehouse. The partner company is also running their application on Google Cloud. They manage the resources in their own project, but they need access to the BigQuery dataset in your project. You want to provide the partner company with access to the dataset What should you do?

- A. Create a Service Account in your own project, and grant this Service Account access to BigQuery in your project
- B. Create a Service Account in your own project, and ask the partner to grant this Service Account access to BigQuery in their project
- C. Ask the partner to create a Service Account in their project, and have them give the Service Account access to BigQuery in their project
- D. Ask the partner to create a Service Account in their project, and grant their Service Account access to the BigQuery dataset in your project

**Answer: D**

**Explanation:**

<https://gtseres.medium.com/using-service-accounts-across-projects-in-gcp-cf9473fef8f0#:~:text=Go%20to%20t>

**NEW QUESTION 24**

Your management has asked an external auditor to review all the resources in a specific project. The security team has enabled the Organization Policy called Domain Restricted Sharing on the organization node by specifying only your Cloud Identity domain. You want the auditor to only be able to view, but not modify, the resources in that project. What should you do?

- A. Ask the auditor for their Google account, and give them the Viewer role on the project.
- B. Ask the auditor for their Google account, and give them the Security Reviewer role on the project.
- C. Create a temporary account for the auditor in Cloud Identity, and give that account the Viewer role on the project.
- D. Create a temporary account for the auditor in Cloud Identity, and give that account the Security Reviewer role on the project.

**Answer: C**

**Explanation:**

Using primitive roles The following table lists the primitive roles that you can grant to access a project, the description of what the role does, and the permissions bundled within that role. Avoid using primitive roles except when absolutely necessary. These roles are very powerful, and include a large number of permissions across all Google Cloud services. For more details on when you should use primitive roles, see the Identity and Access Management FAQ. IAM predefined roles are much more granular, and allow you to carefully manage the set of permissions that your users have access to. See Understanding Roles for a list of roles that can be granted at the project level. Creating custom roles can further increase the control you have over user permissions. [https://cloud.google.com/resource-manager/docs/access-control-proj#using\\_primitive\\_roles](https://cloud.google.com/resource-manager/docs/access-control-proj#using_primitive_roles)  
<https://cloud.google.com/iam/docs/understanding-custom-roles>

**NEW QUESTION 29**

You need to select and configure compute resources for a set of batch processing jobs. These jobs take around 2 hours to complete and are run nightly. You want to minimize service costs. What should you do?

- A. Select Google Kubernetes Engin
- B. Use a single-node cluster with a small instance type.
- C. Select Google Kubernetes Engin
- D. Use a three-node cluster with micro instance types.
- E. Select Compute Engin
- F. Use preemptible VM instances of the appropriate standard machine type.
- G. Select Compute Engin
- H. Use VM instance types that support micro bursting.

**Answer: C**

**Explanation:**

If your apps are fault-tolerant and can withstand possible instance preemptions, then preemptible instances can reduce your Compute Engine costs significantly. For example, batch processing jobs can run on preemptible instances. If some of those instances stop during processing, the job slows but does not completely stop. Preemptible instances complete your batch processing tasks without placing additional workload on your existing instances and without requiring you to pay full price for additional normal instances.  
<https://cloud.google.com/compute/docs/instances/preemptible>

**NEW QUESTION 34**

You are analyzing Google Cloud Platform service costs from three separate projects. You want to use this information to create service cost estimates by service type, daily and monthly, for the next six months using standard query syntax. What should you do?

- A. Export your bill to a Cloud Storage bucket, and then import into Cloud Bigtable for analysis.
- B. Export your bill to a Cloud Storage bucket, and then import into Google Sheets for analysis.
- C. Export your transactions to a local file, and perform analysis with a desktop tool.
- D. Export your bill to a BigQuery dataset, and then write time window-based SQL queries for analysis.

**Answer: D**

**Explanation:**

"...we recommend that you enable Cloud Billing data export to BigQuery at the same time that you create a Cloud Billing account. "  
<https://cloud.google.com/billing/docs/how-to/export-data-bigquery>  
<https://medium.com/google-cloud/analyzing-google-cloud-billing-data-with-big-query-30bae1c2aae4>

**NEW QUESTION 36**

You created a Kubernetes deployment by running `kubectl run nginx image=nginx replicas=1`. After a few days, you decided you no longer want this deployment. You identified the pod and deleted it by running `kubectl delete pod`. You noticed the pod got recreated.

```
> $ kubectl get pods
NAME READY STATUS RESTARTS AGE
nginx-84748895c4-nqqmt 1/1 Running 0 9m41s
> $ kubectl delete pod nginx-84748895c4-nqqmt
pod nginx-84748895c4-nqqmt deleted
> $ kubectl get pods
NAME READY STATUS RESTARTS AGE
nginx-84748895c4-k6bz1 1/1 Running 0 25s
```

What should you do to delete the deployment and avoid pod getting recreated?

- A. `kubectl delete deployment nginx`

- B. `kubectl delete --deployment=nginx`
- C. `kubectl delete pod nginx-84748895c4-k6bz1 --no-restart 2`
- D. `kubectl delete inginx`

**Answer:** A

**Explanation:**

This command correctly deletes the deployment. Pods are managed by kubernetes workloads (deployments). When a pod is deleted, the deployment detects the pod is unavailable and brings up another pod to maintain the replica count. The only way to delete the workload is by deleting the deployment itself using the `kubectl delete deployment` command.

> \$ `kubectl delete deployment nginx`

> `deployment.apps/nginx deleted`

Ref: <https://kubernetes.io/docs/reference/kubectl/cheatsheet/#deleting-resources>

**NEW QUESTION 41**

You are asked to set up application performance monitoring on Google Cloud projects A, B, and C as a single pane of glass. You want to monitor CPU, memory, and disk. What should you do?

- A. Enable API and then share charts from project A, B, and C.
- B. Enable API and then give the `metrics.reader` role to projects A, B, and C.
- C. Enable API and then use default dashboards to view all projects in sequence.
- D. Enable API, create a workspace under project A, and then add project B and C.

**Answer:** D

**Explanation:**

<https://cloud.google.com/monitoring/settings/multiple-projects> <https://cloud.google.com/monitoring/workspaces>

**NEW QUESTION 42**

Your company set up a complex organizational structure on Google Cloud Platform. The structure includes hundreds of folders and projects. Only a few team members should be able to view the hierarchical structure. You need to assign minimum permissions to these team members and you want to follow Google-recommended practices. What should you do?

- A. Add the users to `roles/browser` role.
- B. Add the users to `roles/iam.roleViewer` role.
- C. Add the users to a group, and add this group to `roles/browser` role.
- D. Add the users to a group, and add this group to `roles/iam.roleViewer` role.


**Answer:** C

**Explanation:**

We need to apply the GCP Best practices. `roles/browser` Browser Read access to browse the hierarchy for a project, including the folder, organization, and IAM policy. This role doesn't include permission to view resources in the project. <https://cloud.google.com/iam/docs/understanding-roles>

**NEW QUESTION 45**

Your company has a 3-tier solution running on Compute Engine. The configuration of the current infrastructure is shown below.

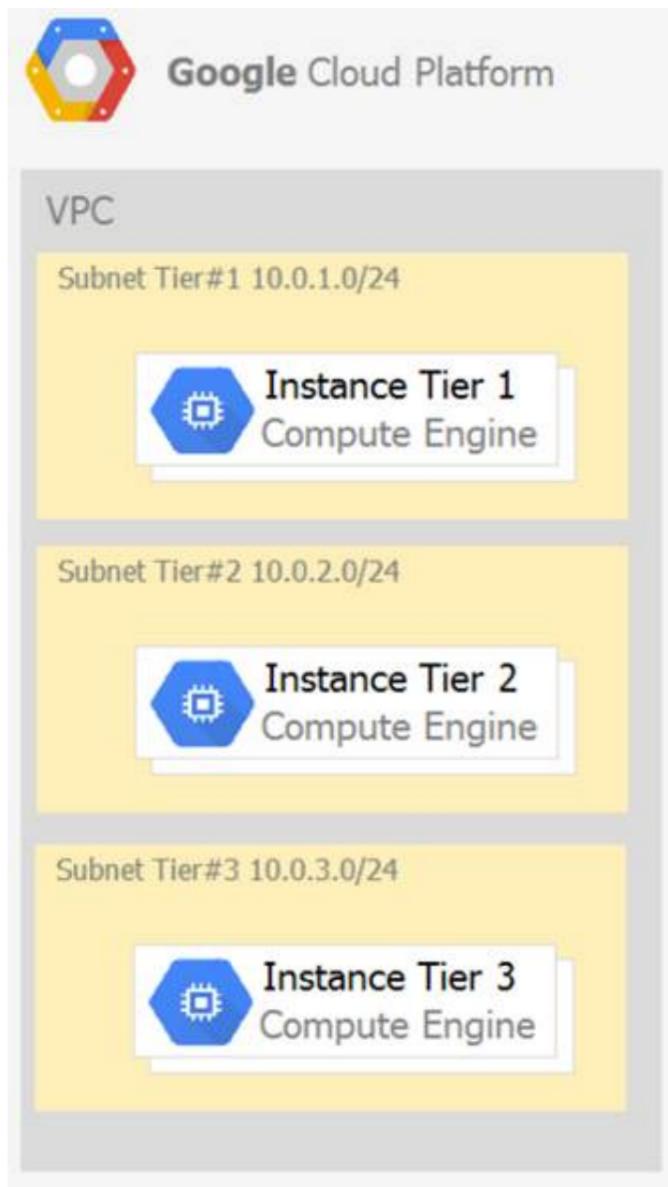

Each tier has a service account that is associated with all instances within it. You need to enable communication on TCP port 8080 between tiers as follows:

- Instances in tier #1 must communicate with tier #2.
- Instances in tier #2 must communicate with tier #3. What should you do?

- A. 1. Create an ingress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.2.0/24)• Protocols: allow all  
 2. Create an ingress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.1.0/24)• Protocols: allow all
- B. 1. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #2 service account• Source filter: all instances with tier #1 service account• Protocols: allow TCP:8080  
 2. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #3 service account• Source filter: all instances with tier #2 service account• Protocols: allow TCP: 8080
- C. 1. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #2 service account• Source filter: all instances with tier #1 service account• Protocols: allow all  
 2. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #3 service account• Source filter: all instances with tier #2 service account• Protocols: allow all
- D. 1. Create an egress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.2.0/24)• Protocols: allow TCP: 8080  
 2. Create an egress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.1.0/24)• Protocols: allow TCP: 8080

**Answer: B**

**Explanation:**

\* 1. Create an ingress firewall rule with the following settings: "¢ Targets: all instances with tier #2 service account "¢ Source filter: all instances with tier #1 service account "¢ Protocols: allow TCP:8080  
 2. Create an ingress firewall rule with the following settings: "¢ Targets: all instances with tier #3 service account "¢ Source filter: all instances with tier #2 service account "¢ Protocols: allow TCP: 8080

**NEW QUESTION 49**

Your VMs are running in a subnet that has a subnet mask of 255.255.255.240. The current subnet has no more free IP addresses and you require an additional 10 IP addresses for new VMs. The existing and new VMs should all be able to reach each other without additional routes. What should you do?

- A. Use gcloud to expand the IP range of the current subnet.
- B. Delete the subnet, and recreate it using a wider range of IP addresses.
- C. Create a new projec
- D. Use Shared VPC to share the current network with the new project.
- E. Create a new subnet with the same starting IP but a wider range to overwrite the current subnet.

**Answer: A**

**Explanation:**

<https://cloud.google.com/sdk/gcloud/reference/compute/networks/subnets/expand-ip-range>  
 gcloud compute networks subnets expand-ip-range - expand the IP range of a Compute Engine subnetwork gcloud compute networks subnets expand-ip-range NAME --prefix-length=PREFIX\_LENGTH [--region=REGION] [GCLOUD\_WIDE\_FLAG ...]

**NEW QUESTION 51**

Your organization has three existing Google Cloud projects. You need to bill the Marketing department for only their Google Cloud services for a new initiative

within their group. What should you do?

- A. \* 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud Project for the Marketing department\* 2. Link the new project to a Marketing Billing Account
- B. \* 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud account\* 2. Create a new Google Cloud Project for the Marketing department\* 3. Set the default key-value project labels to department marketing for all services in this project
- C. \* 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account\* 2. Create a new Google Cloud Project for the Marketing department 3. Link the new project to a Marketing Billing Account.
- D. \* 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account\* 2. Create a new Google Cloud Project for the Marketing department\* 3. Set the default key value project labels to department marketing for all services in this project

**Answer:** A

#### NEW QUESTION 54

A team of data scientists infrequently needs to use a Google Kubernetes Engine (GKE) cluster that you manage. They require GPUs for some long-running, non-restartable jobs. You want to minimize cost. What should you do?

- A. Enable node auto-provisioning on the GKE cluster.
- B. Create a VerticalPodAutscaler for those workloads.
- C. Create a node pool with preemptible VMs and GPUs attached to those VMs.
- D. Create a node pool of instances with GPUs, and enable autoscaling on this node pool with a minimum size of 1.

**Answer:** A

#### Explanation:

auto-provisioning = Attaches and deletes node pools to cluster based on the requirements. Hence creating a GPU node pool, and auto-scaling would be better  
<https://cloud.google.com/kubernetes-engine/docs/how-to/node-auto-provisioning>

#### NEW QUESTION 58

You are designing an application that uses WebSockets and HTTP sessions that are not distributed across the web servers. You want to ensure the application runs properly on Google Cloud Platform. What should you do?

- A. Meet with the cloud enablement team to discuss load balancer options.
- B. Redesign the application to use a distributed user session service that does not rely on WebSockets and HTTP sessions.
- C. Review the encryption requirements for WebSocket connections with the security team.
- D. Convert the WebSocket code to use HTTP streaming.

**Answer:** A

#### Explanation:

➤ Google HTTP(S) Load Balancing has native support for the WebSocket protocol when you use HTTP or HTTPS, not HTTP/2, as the protocol to the backend.  
Ref: [https://cloud.google.com/load-balancing/docs/https#websocket\\_proxy\\_support](https://cloud.google.com/load-balancing/docs/https#websocket_proxy_support)

➤ We don't need to convert WebSocket code to use HTTP streaming or Redesign the application, as WebSocket support is offered by Google HTTP(S) Load Balancing. Reviewing the encryption requirements is a good idea but it has nothing to do with WebSockets.

#### NEW QUESTION 59

You deployed an LDAP server on Compute Engine that is reachable via TLS through port 636 using UDP. You want to make sure it is reachable by clients over that port. What should you do?

- A. Add the network tag allow-udp-636 to the VM instance running the LDAP server.
- B. Create a route called allow-udp-636 and set the next hop to be the VM instance running the LDAP server.
- C. Add a network tag of your choice to the instance
- D. Create a firewall rule to allow ingress on UDP port 636 for that network tag.
- E. Add a network tag of your choice to the instance running the LDAP server
- F. Create a firewall rule to allow egress on UDP port 636 for that network tag.

**Answer:** C

#### Explanation:

A tag is simply a character string added to a tags field in a resource, such as Compute Engine virtual machine (VM) instances or instance templates. A tag is not a separate resource, so you cannot create it separately. All resources with that string are considered to have that tag. Tags enable you to make firewall rules and routes applicable to specific VM instances.

#### NEW QUESTION 60

You are monitoring an application and receive user feedback that a specific error is spiking. You notice that the error is caused by a Service Account having insufficient permissions. You are able to solve the problem but want to be notified if the problem recurs. What should you do?

- A. In the Log Viewer, filter the logs on severity 'Error' and the name of the Service Account.
- B. Create a sink to BigQuery to export all the log
- C. Create a Data Studio dashboard on the exported logs.
- D. Create a custom log-based metric for the specific error to be used in an Alerting Policy.
- E. Grant Project Owner access to the Service Account.

**Answer:** C

#### NEW QUESTION 63

You have a virtual machine that is currently configured with 2 vCPUs and 4 GB of memory. It is running out of memory. You want to upgrade the virtual machine to have 8 GB of memory. What should you do?

- A. Rely on live migration to move the workload to a machine with more memory.
- B. Use gcloud to add metadata to the V
- C. Set the key to required-memory-size and the value to 8 GB.
- D. Stop the VM, change the machine type to n1-standard-8, and start the VM.
- E. Stop the VM, increase the memory to 8 GB, and start the VM.

**Answer: D**

**Explanation:**

In Google compute engine, if predefined machine types don't meet your needs, you can create an instance with custom virtualized hardware settings. Specifically, you can create an instance with a custom number of vCPUs and custom memory, effectively using a custom machine type. Custom machine types are ideal for the following scenarios: 1. Workloads that aren't a good fit for the predefined machine types that are available you. 2. Workloads that require more processing power or more memory but don't need all of the upgrades that are provided by the next machine type level. In our scenario, we only need a memory upgrade. Moving to a bigger instance would also bump up the CPU which we don't need so we have to use a custom machine type. It is not possible to change memory while the instance is running so you need to first stop the instance, change the memory and then start it again. See below a screenshot that shows how CPU/Memory can be customized for an instance that has been stopped. Ref: <https://cloud.google.com/compute/docs/instances/creating-instance-with-custom-machine-type>

**NEW QUESTION 65**

You are building an application that processes data files uploaded from thousands of suppliers. Your primary goals for the application are data security and the expiration of aged data. You need to design the application to:

- Restrict access so that suppliers can access only their own data.
- Give suppliers write access to data only for 30 minutes.
- Delete data that is over 45 days old.

You have a very short development cycle, and you need to make sure that the application requires minimal maintenance. Which two strategies should you use? (Choose two.)

- A. Build a lifecycle policy to delete Cloud Storage objects after 45 days.
- B. Use signed URLs to allow suppliers limited time access to store their objects.
- C. Set up an SFTP server for your application, and create a separate user for each supplier.
- D. Build a Cloud function that triggers a timer of 45 days to delete objects that have expired.
- E. Develop a script that loops through all Cloud Storage buckets and deletes any buckets that are older than 45 days.

**Answer: AB**

**Explanation:**

(A) Object Lifecycle Management Delete

The Delete action deletes an object when the object meets all conditions specified in the lifecycle rule.

Exception: In buckets with Object Versioning enabled, deleting the live version of an object causes it to become a noncurrent version, while deleting a noncurrent version deletes that version permanently.

<https://cloud.google.com/storage/docs/lifecycle#delete>

(B) Signed URLs

This page provides an overview of signed URLs, which you use to give time-limited resource access to anyone in possession of the URL, regardless of whether they have a Google account

<https://cloud.google.com/storage/docs/access-control/signed-urls>

**NEW QUESTION 69**

You are storing sensitive information in a Cloud Storage bucket. For legal reasons, you need to be able to record all requests that read any of the stored data. You want to make sure you comply with these requirements. What should you do?

- A. Enable the Identity Aware Proxy API on the project.
- B. Scan the bucket using the Data Loss Prevention API.
- C. Allow only a single Service Account access to read the data.
- D. Enable Data Access audit logs for the Cloud Storage API.

**Answer: D**

**Explanation:**

Logged information Within Cloud Audit Logs, there are two types of logs: Admin Activity logs: Entries for operations that modify the configuration or metadata of a project, bucket, or object. Data Access logs: Entries for operations that modify objects or read a project, bucket, or object. There are several sub-types of data access logs: ADMIN\_READ: Entries for operations that read the configuration or metadata of a project, bucket, or object. DATA\_READ: Entries for operations that read an object. DATA\_WRITE: Entries for operations that create or modify an object. <https://cloud.google.com/storage/docs/audit-logs#types>

**NEW QUESTION 72**

You have an application that looks for its licensing server on the IP 10.0.3.21. You need to deploy the licensing server on Compute Engine. You do not want to change the configuration of the application and want the application to be able to reach the licensing server. What should you do?

- A. Reserve the IP 10.0.3.21 as a static internal IP address using gcloud and assign it to the licensing server.
- B. Reserve the IP 10.0.3.21 as a static public IP address using gcloud and assign it to the licensing server.
- C. Use the IP 10.0.3.21 as a custom ephemeral IP address and assign it to the licensing server.
- D. Start the licensing server with an automatic ephemeral IP address, and then promote it to a static internal IP address.

**Answer: A**

**Explanation:**

IP 10.0.3.21 is internal by default, and to ensure that it will be static non-changing it should be selected as static internal ip address.

#### NEW QUESTION 75

You need to add a group of new users to Cloud Identity. Some of the users already have existing Google accounts. You want to follow one of Google's recommended practices and avoid conflicting accounts. What should you do?

- A. Invite the user to transfer their existing account
- B. Invite the user to use an email alias to resolve the conflict
- C. Tell the user that they must delete their existing account
- D. Tell the user to remove all personal email from the existing account

**Answer:** A

#### Explanation:

<https://cloud.google.com/architecture/identity/migrating-consumer-accounts>

#### NEW QUESTION 77

You need to set up a policy so that videos stored in a specific Cloud Storage Regional bucket are moved to Coldline after 90 days, and then deleted after one year from their creation. How should you set up the policy?

- A. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- B. Set the SetStorageClass action to 90 days and the Delete action to 275 days (365 – 90)
- C. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- D. Set the SetStorageClass action to 90 days and the Delete action to 365 days.
- E. Use gsutil rewrite and set the Delete action to 275 days (365-90).
- F. Use gsutil rewrite and set the Delete action to 365 days.

**Answer:** A

#### Explanation:

<https://cloud.google.com/storage/docs/lifecycle#setstorageclass-cost>

# The object's time spent set at the original storage class counts towards any minimum storage duration that applies for the new storage class.

#### NEW QUESTION 81

You deployed an App Engine application using gcloud app deploy, but it did not deploy to the intended project. You want to find out why this happened and where the application deployed. What should you do?

- A. Check the app.yaml file for your application and check project settings.
- B. Check the web-application.xml file for your application and check project settings.
- C. Go to Deployment Manager and review settings for deployment of applications.
- D. Go to Cloud Shell and run gcloud config list to review the Google Cloud configuration used for deployment.

**Answer:** D

#### Explanation:

C:\GCP\appeng>gcloud config list [core]

account = xxx@gmail.com disable\_usage\_reporting = False project = my-first-demo-xxxx

<https://cloud.google.com/endpoints/docs/openapi/troubleshoot-gce-deployment>

#### NEW QUESTION 83

You manage an App Engine Service that aggregates and visualizes data from BigQuery. The application is deployed with the default App Engine Service account. The data that needs to be visualized resides in a different project managed by another team. You do not have access to this project, but you want your application to be able to read data from the BigQuery dataset. What should you do?

- A. Ask the other team to grant your default App Engine Service account the role of BigQuery Job User.
- B. Ask the other team to grant your default App Engine Service account the role of BigQuery Data Viewer.
- C. In Cloud IAM of your project, ensure that the default App Engine service account has the role of BigQuery Data Viewer.
- D. In Cloud IAM of your project, grant a newly created service account from the other team the role of BigQuery Job User in your project.

**Answer:** B

#### Explanation:

The resource that you need to get access is in the other project. roles/bigquery.dataViewer BigQuery Data Viewer

When applied to a table or view, this role provides permissions to: Read data and metadata from the table or view.

This role cannot be applied to individual models or routines.

When applied to a dataset, this role provides permissions to: Read the dataset's metadata and list tables in the dataset. Read data and metadata from the dataset's tables.

When applied at the project or organization level, this role can also enumerate all datasets in the project. Additional roles, however, are necessary to allow the running of jobs.

#### NEW QUESTION 87

You are building an archival solution for your data warehouse and have selected Cloud Storage to archive your data. Your users need to be able to access this archived data once a quarter for some regulatory requirements. You want to select a cost-efficient option. Which storage option should you use?

- A. Coldline Storage
- B. Nearline Storage
- C. Regional Storage
- D. Multi-Regional Storage

**Answer:** A

**Explanation:**

Coldline Storage is a very-low-cost, highly durable storage service for storing infrequently accessed data. Coldline Storage is ideal for data you plan to read or modify at most once a quarter. Since we have a requirement to access data once a quarter and want to go with the most cost-efficient option, we should select Coldline Storage.

Ref: <https://cloud.google.com/storage/docs/storage-classes#coldline>

## Google Cloud Storage Classes in the Organization

This slide represents the different types of storage classes such as multi-regional, regional, storage nearline, and storage cold line of the Google Cloud.

Storage Class	Characteristics	Use Cases	Price (Per Gb Per Month)*
Multi-Regional Storage	<ul style="list-style-type: none"> <li>99.95% availability</li> <li>Geo-redundant</li> </ul>	Keeps information that is frequently accessed around the globe, such as videos, gaming, and mobile applications	\$0.026 per GB/Month
Regional Storage	<ul style="list-style-type: none"> <li>99.9% availability</li> <li>Low cost per GB stored</li> <li>Data storage in a small region</li> </ul>	Keeps information that is frequently accessed around the globe, such as videos, gaming, and mobile applications	\$0.02 per GB/Month
Storage Nearline	<ul style="list-style-type: none"> <li>99.0% availability</li> <li>Very low cost per GB</li> <li>Data fetching costs</li> <li>Higher per-task costs</li> <li>30-day minimum storage duration</li> </ul>	Keeps data that is not accessed is often ideal for data backups	\$0.01 per GB/Month
Storage Cold line	<ul style="list-style-type: none"> <li>99.0% availability</li> <li>Lowest cost per GB</li> <li>Data fetching costs</li> <li>Higher per-task costs</li> <li>90-day minimum storage duration</li> </ul>	Keeps information that is infrequently ideal for disaster recovery or archived data	\$0.007 per GB/Month

This slide is 100% editable. Adapt it to your needs and capture your audience's attention.

**NEW QUESTION 91**

You have been asked to migrate a docker application from datacenter to cloud. Your solution architect has suggested uploading docker images to GCR in one project and running an application in a GKE cluster in a separate project. You want to store images in the project img-278322 and run the application in the project prod-278986. You want to tag the image as acme\_track\_n\_trace:v1. You want to follow Google-recommended practices. What should you do?

- A. Run `gcloud builds submit --tag gcr.io/img-278322/acme_track_n_trace`
- B. Run `gcloud builds submit --tag gcr.io/img-278322/acme_track_n_trace:v1`
- C. Run `gcloud builds submit --tag gcr.io/prod-278986/acme_track_n_trace`
- D. Run `gcloud builds submit --tag gcr.io/prod-278986/acme_track_n_trace:v1`

**Answer: B**

**Explanation:**

➤ Run `gcloud builds submit tag gcr.io/img-278322/acme_track_n_trace:v1`. is the right answer. This command correctly tags the image as acme\_track\_n\_trace:v1 and uploads the image to the img-278322 project.  
 Ref: <https://cloud.google.com/sdk/gcloud/reference/builds/submit>

**NEW QUESTION 95**

You need to create a Compute Engine instance in a new project that doesn't exist yet. What should you do?

- A. Using the Cloud SDK, create a new project, enable the Compute Engine API in that project, and then create the instance specifying your new project.
- B. Enable the Compute Engine API in the Cloud Console, use the Cloud SDK to create the instance, and then use the `—project` flag to specify a new project.
- C. Using the Cloud SDK, create the new instance, and use the `—project` flag to specify the new project. Answer yes when prompted by Cloud SDK to enable the Compute Engine API.
- D. Enable the Compute Engine API in the Cloud Console
- E. Go to the Compute Engine section of the Console to create a new instance, and look for the Create In A New Project option in the creation form.

**Answer: A**

**Explanation:**

<https://cloud.google.com/sdk/gcloud/reference/projects/create> Quickstart: Creating a New Instance Using the Command Line Before you begin

- \* 1. In the Cloud Console, on the project selector page, select or create a Cloud project.
- \* 2. Make sure that billing is enabled for your Google Cloud project. Learn how to confirm billing is enabled for your project.

To use the gcloud command-line tool for this quickstart, you must first install and initialize the Cloud SDK:

- \* 1. Download and install the Cloud SDK using the instructions given on Installing Google Cloud SDK.
- \* 2. Initialize the SDK using the instructions given on Initializing Cloud SDK.

To use gcloud in Cloud Shell for this quickstart, first activate Cloud Shell using the instructions given on Starting Cloud Shell.  
<https://cloud.google.com/ai-platform/deep-learning-vm/docs/quickstart-cli#before-you-begin>

#### NEW QUESTION 98

You need to manage a Cloud Spanner Instance for best query performance. Your instance in production runs in a single Google Cloud region. You need to improve performance in the shortest amount of time. You want to follow Google best practices for service configuration. What should you do?

- A. Create an alert in Cloud Monitoring to alert when the percentage of high priority CPU utilization reaches 45% If you exceed this threshold, add nodes to your instance.
- B. Create an alert in Cloud Monitoring to alert when the percentage of high priority CPU utilization reaches 45% Use database query statistics to identify queries that result in high CPU usage, and then rewrite those queries to optimize their resource usage
- C. Create an alert in Cloud Monitoring to alert when the percentage of high priority CPU utilization reaches 65% If you exceed this threshold, add nodes to your instance
- D. Create an alert in Cloud Monitoring to alert when the percentage of high priority CPU utilization reaches 65%. Use database query statistics to identify queries that result in high CPU usage, and then rewrite those queries to optimize their resource usage.

**Answer: C**

#### Explanation:

<https://cloud.google.com/spanner/docs/cpu-utilization#recommended-max>

#### NEW QUESTION 101

You created a cluster.YAML file containing

- > resources:
- > name: cluster
- > type: container.v1.cluster
- > properties:
- > zone: europe-west1-b
- > cluster:
- > description: My GCP ACE cluster
- > initialNodeCount: 2

You want to use Cloud Deployment Manager to create this cluster in GKE.  
 What should you do?

- A. gcloud deployment-manager deployments create my-gcp-ace-cluster --config cluster.yaml
- B. gcloud deployment-manager deployments create my-gcp-ace-cluster --type container.v1.cluster --config cluster.yaml
- C. gcloud deployment-manager deployments apply my-gcp-ace-cluster --type container.v1.cluster --config cluster.yaml
- D. gcloud deployment-manager deployments apply my-gcp-ace-cluster --config cluster.yaml

**Answer: D**

#### Explanation:

gcloud deployment-manager deployments create creates deployments based on the configuration file. (Infrastructure as code). All the configuration related to the artifacts is in the configuration file. This command correctly creates a cluster based on the provided cluster.yaml configuration file.

Ref: <https://cloud.google.com/sdk/gcloud/reference/deployment-manager/deployments/create>

#### NEW QUESTION 102

You created several resources in multiple Google Cloud projects. All projects are linked to different billing accounts. To better estimate future charges, you want to have a single visual representation of all costs incurred. You want to include new cost data as soon as possible. What should you do?

- A. Configure Billing Data Export to BigQuery and visualize the data in Data Studio.
- B. Visit the Cost Table page to get a CSV export and visualize it using Data Studio.
- C. Fill all resources in the Pricing Calculator to get an estimate of the monthly cost.
- D. Use the Reports view in the Cloud Billing Console to view the desired cost information.

**Answer: A**

#### Explanation:

<https://cloud.google.com/billing/docs/how-to/export-data-bigquery> "Cloud Billing export to BigQuery enables you to export detailed Google Cloud billing data (such as usage, cost estimates, and pricing data) automatically throughout the day to a BigQuery dataset that you specify."

#### NEW QUESTION 106

You want to find out when users were added to Cloud Spanner Identity Access Management (IAM) roles on your Google Cloud Platform (GCP) project. What should you do in the GCP Console?

- A. Open the Cloud Spanner console to review configurations.
- B. Open the IAM & admin console to review IAM policies for Cloud Spanner roles.
- C. Go to the Stackdriver Monitoring console and review information for Cloud Spanner.
- D. Go to the Stackdriver Logging console, review admin activity logs, and filter them for Cloud Spanner IAM roles.

**Answer: D**

#### Explanation:

<https://cloud.google.com/monitoring/audit-logging>

#### NEW QUESTION 111

You need to enable traffic between multiple groups of Compute Engine instances that are currently running two different GCP projects. Each group of Compute Engine instances is running in its own VPC. What should you do?

- A. Verify that both projects are in a GCP Organization
- B. Create a new VPC and add all instances.
- C. Verify that both projects are in a GCP Organization
- D. Share the VPC from one project and request that the Compute Engine instances in the other project use this shared VPC.
- E. Verify that you are the Project Administrator of both project
- F. Create two new VPCs and add all instances.
- G. Verify that you are the Project Administrator of both project
- H. Create a new VPC and add all instances.

**Answer:** B

#### Explanation:

Shared VPC allows an organization to connect resources from multiple projects to a common Virtual Private Cloud (VPC) network, so that they can communicate with each other securely and efficiently using internal IPs from that network. When you use Shared VPC, you designate a project as a host project and attach one or more other service projects to it. The VPC networks in the host project are called Shared VPC networks. Eligible resources from service projects can use subnets in the Shared VPC network

<https://cloud.google.com/vpc/docs/shared-vpc>

"For example, an existing instance in a service project cannot be reconfigured to use a Shared VPC network, but a new instance can be created to use available subnets in a Shared VPC network."

#### NEW QUESTION 116

You are using Google Kubernetes Engine with autoscaling enabled to host a new application. You want to expose this new application to the public, using HTTPS on a public IP address. What should you do?

- A. Create a Kubernetes Service of type NodePort for your application, and a Kubernetes Ingress to expose this Service via a Cloud Load Balancer.
- B. Create a Kubernetes Service of type ClusterIP for your application
- C. Configure the public DNS name of your application using the IP of this Service.
- D. Create a Kubernetes Service of type NodePort to expose the application on port 443 of each node of the Kubernetes cluster
- E. Configure the public DNS name of your application with the IP of every node of the cluster to achieve load-balancing.
- F. Create a HAProxy pod in the cluster to load-balance the traffic to all the pods of the application. Forward the public traffic to HAProxy with an iptables rule
- G. Configure the DNS name of your application using the public IP of the node HAProxy is running on.

**Answer:** A

#### NEW QUESTION 118

Your company wants to standardize the creation and management of multiple Google Cloud resources using Infrastructure as Code. You want to minimize the amount of repetitive code needed to manage the environment. What should you do?

- A. Create a bash script that contains all requirement steps as gcloud commands
- B. Develop templates for the environment using Cloud Deployment Manager
- C. Use curl in a terminal to send a REST request to the relevant Google API for each individual resource.
- D. Use the Cloud Console interface to provision and manage all related resources

**Answer:** B

#### Explanation:

You can use Google Cloud Deployment Manager to create a set of Google Cloud resources and manage them as a unit, called a deployment. For example, if your team's development environment needs two virtual machines (VMs) and a BigQuery database, you can define these resources in a configuration file, and use Deployment Manager to create, change, or delete these resources. You can make the configuration file part of your team's code repository, so that anyone can create the same environment with consistent results. <https://cloud.google.com/deployment-manager/docs/quickstart>

#### NEW QUESTION 123

Your company runs one batch process in an on-premises server that takes around 30 hours to complete. The task runs monthly, can be performed offline, and must be restarted if interrupted. You want to migrate this workload to the cloud while minimizing cost. What should you do?

- A. Migrate the workload to a Compute Engine Preemptible VM.
- B. Migrate the workload to a Google Kubernetes Engine cluster with Preemptible nodes.
- C. Migrate the workload to a Compute Engine VM
- D. Start and stop the instance as needed.
- E. Create an Instance Template with Preemptible VMs
- F. Create a Managed Instance Group from the template and adjust Target CPU Utilization
- G. Migrate the workload.

**Answer:** D

#### Explanation:

Install the workload in a compute engine VM, start and stop the instance as needed, because as per the question the VM runs for 30 hours, process can be performed offline and should not be interrupted, if interrupted we need to restart the batch process again. Preemptible VMs are cheaper, but they will not be available beyond 24hrs, and if the process gets interrupted the preemptible VM will restart.

#### NEW QUESTION 124

You need to update a deployment in Deployment Manager without any resource downtime in the deployment. Which command should you use?

- A. `gcloud deployment-manager deployments create --config <deployment-config-path>`
- B. `gcloud deployment-manager deployments update --config <deployment-config-path>`

- C. gcloud deployment-manager resources create --config <deployment-config-path>
- D. gcloud deployment-manager resources update --config <deployment-config-path>

**Answer:** B

#### NEW QUESTION 127

You need to provide a cost estimate for a Kubernetes cluster using the GCP pricing calculator for Kubernetes. Your workload requires high IOPs, and you will also be using disk snapshots. You start by entering the number of nodes, average hours, and average days. What should you do next?

- A. Fill in local SS
- B. Fill in persistent disk storage and snapshot storage.
- C. Fill in local SS
- D. Add estimated cost for cluster management.
- E. Select Add GPU
- F. Fill in persistent disk storage and snapshot storage.
- G. Select Add GPU
- H. Add estimated cost for cluster management.

**Answer:** A

#### Explanation:

<https://cloud.google.com/compute/docs/disks/local-ssd>

#### NEW QUESTION 128

You need to produce a list of the enabled Google Cloud Platform APIs for a GCP project using the gcloud command line in the Cloud Shell. The project name is my-project. What should you do?

- A. Run gcloud projects list to get the project ID, and then run gcloud services list --project <project ID>.
- B. Run gcloud init to set the current project to my-project, and then run gcloud services list --available.
- C. Run gcloud info to view the account value, and then run gcloud services list --account <Account>.
- D. Run gcloud projects describe <project ID> to verify the project value, and then run gcloud services list--available.

**Answer:** A

#### Explanation:

`gcloud services list --available` returns not only the enabled services in the project but also services that CAN be enabled.

<https://cloud.google.com/sdk/gcloud/reference/services/list#--available>

Run the following command to list the enabled APIs and services in your current project: gcloud services list

whereas, Run the following command to list the APIs and services available to you in your current project: gcloud services list --available

<https://cloud.google.com/sdk/gcloud/reference/services/list#--available>

--available

Return the services available to the project to enable. This list will include any services that the project has already enabled.

To list the services the current project has enabled for consumption, run: gcloud services list --enabled

To list the services the current project can enable for consumption, run: gcloud services list --available

#### NEW QUESTION 131

You have created an application that is packaged into a Docker image. You want to deploy the Docker image as a workload on Google Kubernetes Engine. What should you do?

- A. Upload the image to Cloud Storage and create a Kubernetes Service referencing the image.
- B. Upload the image to Cloud Storage and create a Kubernetes Deployment referencing the image.
- C. Upload the image to Container Registry and create a Kubernetes Service referencing the image.
- D. Upload the image to Container Registry and create a Kubernetes Deployment referencing the image.

**Answer:** D

#### Explanation:

A deployment is responsible for keeping a set of pods running. A service is responsible for enabling network access to a set of pods.

#### NEW QUESTION 135

Your coworker has helped you set up several configurations for gcloud. You've noticed that you're running commands against the wrong project. Being new to the company, you haven't yet memorized any of the projects. With the fewest steps possible, what's the fastest way to switch to the correct configuration?

- A. Run gcloud configurations list followed by gcloud configurations activate .
- B. Run gcloud config list followed by gcloud config activate.
- C. Run gcloud config configurations list followed by gcloud config configurations activate.
- D. Re-authenticate with the gcloud auth login command and select the correct configurations on login.

**Answer:** C

#### Explanation:

as gcloud config configurations list can help check for the existing configurations and activate can help switch to the configuration.

gcloud config configurations list lists existing named configurations

gcloud config configurations activate activates an existing named configuration

Obtains access credentials for your user account via a web-based authorization flow. When this command completes successfully, it sets the active account in the current configuration to the account specified. If no configuration exists, it creates a configuration named default.

#### NEW QUESTION 140

Your organization has a dedicated person who creates and manages all service accounts for Google Cloud projects. You need to assign this person the minimum role for projects. What should you do?

- A. Add the user to roles/iam.roleAdmin role.
- B. Add the user to roles/iam.securityAdmin role.
- C. Add the user to roles/iam.serviceAccountUser role.
- D. Add the user to roles/iam.serviceAccountAdmin role.

**Answer:** D

#### NEW QUESTION 142

You have one GCP account running in your default region and zone and another account running in a non-default region and zone. You want to start a new Compute Engine instance in these two Google Cloud Platform accounts using the command line interface. What should you do?

- A. Create two configurations using `gcloud config configurations create [NAME]`. Run `gcloud config configurations activate [NAME]` to switch between accounts when running the commands to start the Compute Engine instances.
- B. Create two configurations using `gcloud config configurations create [NAME]`. Run `gcloud configurations list` to start the Compute Engine instances.
- C. Activate two configurations using `gcloud configurations activate [NAME]`. Run `gcloud config list` to start the Compute Engine instances.
- D. Activate two configurations using `gcloud configurations activate [NAME]`. Run `gcloud configurations list` to start the Compute Engine instances.

**Answer:** A

#### Explanation:

"Run `gcloud configurations list` to start the Compute Engine instances". How the heck are you expecting to "start" GCE instances doing "configuration list". Each `gcloud` configuration has a 1 to 1 relationship with the region (if a region is defined). Since we have two different regions, we would need to create two separate configurations using `gcloud config configurations createRef: https://cloud.google.com/sdk/gcloud/reference/config/configurations/create`. Secondly, you can activate each configuration independently by running `gcloud config configurations activate [NAME]`Ref: <https://cloud.google.com/sdk/gcloud/reference/config/configurations/activate>. Finally, while each configuration is active, you can run the `gcloud compute instances start [NAME]` command to start the instance in the configurations region.<https://cloud.google.com/sdk/gcloud/reference/compute/instances/start>

#### NEW QUESTION 143

Your company implemented BigQuery as an enterprise data warehouse. Users from multiple business units run queries on this data warehouse. However, you notice that query costs for BigQuery are very high, and you need to control costs. Which two methods should you use? (Choose two.)

- A. Split the users from business units to multiple projects.
- B. Apply a user- or project-level custom query quota for BigQuery data warehouse.
- C. Create separate copies of your BigQuery data warehouse for each business unit.
- D. Split your BigQuery data warehouse into multiple data warehouses for each business unit.
- E. Change your BigQuery query model from on-demand to flat rat
- F. Apply the appropriate number of slots to each Project.

**Answer:** BE

#### Explanation:

<https://cloud.google.com/bigquery/docs/custom-quotas> [https://cloud.google.com/bigquery/pricing#flat\\_rate\\_pricing](https://cloud.google.com/bigquery/pricing#flat_rate_pricing)

#### NEW QUESTION 145

You want to send and consume Cloud Pub/Sub messages from your App Engine application. The Cloud Pub/Sub API is currently disabled. You will use a service account to authenticate your application to the API. You want to make sure your application can use Cloud Pub/Sub. What should you do?

- A. Enable the Cloud Pub/Sub API in the API Library on the GCP Console.
- B. Rely on the automatic enablement of the Cloud Pub/Sub API when the Service Account accesses it.
- C. Use Deployment Manager to deploy your applicatio
- D. Rely on the automatic enablement of all APIs used by the application being deployed.
- E. Grant the App Engine Default service account the role of Cloud Pub/Sub Admi
- F. Have your application enable the API on the first connection to Cloud Pub/Sub.

**Answer:** A

#### Explanation:

Quickstart: using the Google Cloud Console

This page shows you how to perform basic tasks in Pub/Sub using the Google Cloud Console. Note: If you are new to Pub/Sub, we recommend that you start with the interactive tutorial. Before you begin

Set up a Cloud Console project. Set up a project

Click to:

Create or select a project.

Enable the Pub/Sub API for that project.

You can view and manage these resources at any time in the Cloud Console. Install and initialize the Cloud SDK.

Note: You can run the `gcloud` tool in the Cloud Console without installing the Cloud SDK. To run the `gcloud` tool in the Cloud Console, use Cloud Shell .

<https://cloud.google.com/pubsub/docs/quickstart-console>

#### NEW QUESTION 147

You have deployed an application on a single Compute Engine instance. The application writes logs to disk. Users start reporting errors with the application. You want to diagnose the problem. What should you do?

- A. Navigate to Cloud Logging and view the application logs.
- B. Connect to the instance's serial console and read the application logs.

- C. Configure a Health Check on the instance and set a Low Healthy Threshold value.
- D. Install and configure the Cloud Logging Agent and view the logs from Cloud Logging.

**Answer:** D

#### NEW QUESTION 150

Your company runs its Linux workloads on Compute Engine instances. Your company will be working with a new operations partner that does not use Google Accounts. You need to grant access to the instances to your operations partner so they can maintain the installed tooling. What should you do?

- A. Enable Cloud IAP for the Compute Engine instances, and add the operations partner as a Cloud IAP Tunnel User.
- B. Tag all the instances with the same network tag
- C. Create a firewall rule in the VPC to grant TCP access on port 22 for traffic from the operations partner to instances with the network tag.
- D. Set up Cloud VPN between your Google Cloud VPC and the internal network of the operations partner.
- E. Ask the operations partner to generate SSH key pairs, and add the public keys to the VM instances.

**Answer:** A

#### Explanation:

IAP controls access to your App Engine apps and Compute Engine VMs running on Google Cloud. It leverages user identity and the context of a request to determine if a user should be allowed access. IAP is a building block toward BeyondCorp, an enterprise security model that enables employees to work from untrusted networks without using a VPN.

By default, IAP uses Google identities and IAM. By leveraging Identity Platform instead, you can authenticate users with a wide range of external identity providers, such as:

- Email/password
- OAuth (Google, Facebook, Twitter, GitHub, Microsoft, etc.) SAML
- OIDC
- Phone number Custom Anonymous

This is useful if your application is already using an external authentication system, and migrating your users to Google accounts is impractical.

<https://cloud.google.com/iap/docs/using-tcp-forwarding#grant-permission>

#### NEW QUESTION 155

A colleague handed over a Google Cloud Platform project for you to maintain. As part of a security checkup, you want to review who has been granted the Project Owner role. What should you do?

- A. In the console, validate which SSH keys have been stored as project-wide keys.
- B. Navigate to Identity-Aware Proxy and check the permissions for these resources.
- C. Enable Audit Logs on the IAM & admin page for all resources, and validate the results.
- D. Use the command `gcloud projects get-iam-policy` to view the current role assignments.

**Answer:** D

#### Explanation:

A simple approach would be to use the command flags available when listing all the IAM policy for a given project. For instance, the following command: `gcloud projects get-iam-policy $PROJECT_ID`

`--flatten="bindings[].members" --format="table(bindings.members)" --filter="bindings.role:roles/owner"` outputs all the users and service accounts associated with the role 'roles/owner' in the project in question. <https://groups.google.com/g/google-cloud-dev/c/Z6sZs7TvygQ?pli=1>

#### NEW QUESTION 160

You created a Google Cloud Platform project with an App Engine application inside the project. You initially configured the application to be served from the us-central region. Now you want the application to be served from the asia-northeast1 region. What should you do?

- A. Change the default region property setting in the existing GCP project to asia-northeast1.
- B. Change the region property setting in the existing App Engine application from us-central to asia-northeast1.
- C. Create a second App Engine application in the existing GCP project and specify asia-northeast1 as the region to serve your application.
- D. Create a new GCP project and create an App Engine application inside this new project
- E. Specify asia-northeast1 as the region to serve your application.

**Answer:** D

#### Explanation:

<https://cloud.google.com/appengine/docs/flexible/managing-projects-apps-billing#:~:text=Each%20Cloud%20p> Two App engine can't be running on the same project: you can check this easy diagram for more info:

[https://cloud.google.com/appengine/docs/standard/an-overview-of-app-engine#components\\_of\\_an\\_application](https://cloud.google.com/appengine/docs/standard/an-overview-of-app-engine#components_of_an_application)

And you can't change location after setting it for your app Engine. <https://cloud.google.com/appengine/docs/standard/locations>

App Engine is regional and you cannot change an apps region after you set it. Therefore, the only way to have an app run in another region is by creating a new project and targeting the app engine to run in the required region (asia-northeast1 in our case).

Ref: <https://cloud.google.com/appengine/docs/locations>

#### NEW QUESTION 163

You want to verify the IAM users and roles assigned within a GCP project named my-project. What should you do?

- A. Run `gcloud iam roles list`
- B. Review the output section.
- C. Run `gcloud iam service-accounts list`
- D. Review the output section.
- E. Navigate to the project and then to the IAM section in the GCP Console
- F. Review the members and roles.
- G. Navigate to the project and then to the Roles section in the GCP Console
- H. Review the roles and status.

**Answer:** C

**Explanation:**

Logged onto console and followed the steps and was able to see all the assigned users and roles.

**NEW QUESTION 164**

You want to run a single caching HTTP reverse proxy on GCP for a latency-sensitive website. This specific reverse proxy consumes almost no CPU. You want to have a 30-GB in-memory cache, and need an additional 2 GB of memory for the rest of the processes. You want to minimize cost. How should you run this reverse proxy?

- A. Create a Cloud Memorystore for Redis instance with 32-GB capacity.
- B. Run it on Compute Engine, and choose a custom instance type with 6 vCPUs and 32 GB of memory.
- C. Package it in a container image, and run it on Kubernetes Engine, using n1-standard-32 instances as nodes.
- D. Run it on Compute Engine, choose the instance type n1-standard-1, and add an SSD persistent disk of 32 GB.

**Answer:** A

**Explanation:**

What is Google Cloud Memorystore?

Overview. Cloud Memorystore for Redis is a fully managed Redis service for Google Cloud Platform. Applications running on Google Cloud Platform can achieve extreme performance by leveraging the highly scalable, highly available, and secure Redis service without the burden of managing complex Redis deployments.

**NEW QUESTION 168**

Your organization has strict requirements to control access to Google Cloud projects. You need to enable your Site Reliability Engineers (SREs) to approve requests from the Google Cloud support team when an SRE opens a support case. You want to follow Google-recommended practices. What should you do?

- A. Add your SREs to roles/iam.roleAdmin role.
- B. Add your SREs to roles/accessapproval approver role.
- C. Add your SREs to a group and then add this group to roles/iam roleAdmin role.
- D. Add your SREs to a group and then add this group to roles/accessapproval approver role.

**Answer:** D

**NEW QUESTION 172**

You are deploying an application to a Compute Engine VM in a managed instance group. The application must be running at all times, but only a single instance of the VM should run per GCP project. How should you configure the instance group?

- A. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- B. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- C. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 2.
- D. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 2.

**Answer:** A

**Explanation:**

<https://cloud.google.com/compute/docs/autoscaler#specifications>

Autoscaling works independently from autohealing. If you configure autohealing for your group and an instance fails the health check, the autohealer attempts to recreate the instance. Recreating an instance can cause the number of instances in the group to fall below the autoscaling threshold (minNumReplicas) that you specify.

- > Since we need the application running at all times, we need a minimum 1 instance.
- > Only a single instance of the VM should run, we need a maximum 1 instance.
- > We want the application running at all times. If the VM crashes due to any underlying hardware failure, we want another instance to be added to MIG so that application can continue to serve requests. We can achieve this by enabling autoscaling. The only option that satisfies these three is Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 1.

Ref: <https://cloud.google.com/compute/docs/autoscaler>

**NEW QUESTION 177**

Your organization uses Active Directory (AD) to manage user identities. Each user uses this identity for federated access to various on-premises systems. Your security team has adopted a policy that requires users to log into Google Cloud with their AD identity instead of their own login. You want to follow the Google-recommended practices to implement this policy. What should you do?

- A. Sync Identities with Cloud Directory Sync, and then enable SAML for single sign-on
- B. Sync Identities in the Google Admin console, and then enable Oauth for single sign-on
- C. Sync identities with 3rd party LDAP sync, and then copy passwords to allow simplified login with (he same credentials
- D. Sync identities with Cloud Directory Sync, and then copy passwords to allow simplified login with the same credentials.

**Answer:** A

**NEW QUESTION 178**

You have one project called proj-sa where you manage all your service accounts. You want to be able to use a service account from this project to take snapshots of VMs running in another project called proj-vm. What should you do?

- A. Download the private key from the service account, and add it to each VMs custom metadata.
- B. Download the private key from the service account, and add the private key to each VM's SSH keys.
- C. Grant the service account the IAM Role of Compute Storage Admin in the project called proj-vm.
- D. When creating the VMs, set the service account's API scope for Compute Engine to read/write.

**Answer:** C

**Explanation:**

<https://gtseres.medium.com/using-service-accounts-across-projects-in-gcp-cf9473fef8f0>

You create the service account in proj-sa and take note of the service account email, then you go to proj-vm in IAM > ADD and add the service account's email as new member and give it the Compute Storage Admin role.

<https://cloud.google.com/compute/docs/access/iam#compute.storageAdmin>

**NEW QUESTION 181**

You have created a code snippet that should be triggered whenever a new file is uploaded to a Cloud Storage bucket. You want to deploy this code snippet. What should you do?

- A. Use App Engine and configure Cloud Scheduler to trigger the application using Pub/Sub.
- B. Use Cloud Functions and configure the bucket as a trigger resource.
- C. Use Google Kubernetes Engine and configure a CronJob to trigger the application using Pub/Sub.
- D. Use Dataflow as a batch job, and configure the bucket as a data source.

**Answer:** B

**Explanation:**

Google Cloud Storage Triggers

Cloud Functions can respond to change notifications emerging from Google Cloud Storage. These notifications can be configured to trigger in response to various events inside a bucket—object creation, deletion, archiving and metadata updates.

Note: Cloud Functions can only be triggered by Cloud Storage buckets in the same Google Cloud Platform project.

Event types

Cloud Storage events used by Cloud Functions are based on Cloud Pub/Sub Notifications for Google Cloud Storage and can be configured in a similar way.

Supported trigger type values are: google.storage.object.finalize google.storage.object.delete google.storage.object.archive google.storage.object.metadataUpdate

Object Finalize

Trigger type value: google.storage.object.finalize

This event is sent when a new object is created (or an existing object is overwritten, and a new generation of that object is created) in the bucket.

[https://cloud.google.com/functions/docs/calling/storage#event\\_types](https://cloud.google.com/functions/docs/calling/storage#event_types)

**NEW QUESTION 186**

Your auditor wants to view your organization's use of data in Google Cloud. The auditor is most interested in auditing who accessed data in Cloud Storage buckets. You need to help the auditor access the data they need. What should you do?

- A. Assign the appropriate permissions, and then use Cloud Monitoring to review metrics
- B. Use the export logs API to provide the Admin Activity Audit Logs in the format they want
- C. Turn on Data Access Logs for the buckets they want to audit, and Then build a query in the log viewer that filters on Cloud Storage
- D. Assign the appropriate permissions, and then create a Data Studio report on Admin Activity Audit Logs

**Answer:** C

**Explanation:**

Types of audit logs Cloud Audit Logs provides the following audit logs for each Cloud project, folder, and organization: Admin Activity audit logs Data Access audit logs System Event audit logs Policy Denied audit logs \*\*\*Data Access audit logs contain API calls that read the configuration or metadata of resources, as well as user-driven API calls that create, modify, or read user-provided resource data. <https://cloud.google.com/logging/docs/audit#types>

<https://cloud.google.com/logging/docs/audit#data-access> Cloud Storage: When Cloud Storage usage logs are enabled, Cloud Storage writes usage data to the Cloud Storage bucket, which generates Data Access audit logs for the bucket. The generated Data Access audit log has its caller identity redacted.

**NEW QUESTION 188**

Your company developed a mobile game that is deployed on Google Cloud. Gamers are connecting to the game with their personal phones over the Internet. The game sends UDP packets to update the servers about the gamers' actions while they are playing in multiplayer mode. Your game backend can scale over multiple virtual machines (VMs), and you want to expose the VMs over a single IP address. What should you do?

- A. Configure an SSL Proxy load balancer in front of the application servers.
- B. Configure an Internal UDP load balancer in front of the application servers.
- C. Configure an External HTTP(s) load balancer in front of the application servers.
- D. Configure an External Network load balancer in front of the application servers.

**Answer:** D

**Explanation:**

cell phones are sending UDP packets and the only that can receive that type of traffic is a External Network TCP/UDP <https://cloud.google.com/load-balancing/docs/network>

<https://cloud.google.com/load-balancing/docs/choosing-load-balancer#lb-decision-tree>

**NEW QUESTION 192**

You are running multiple VPC-native Google Kubernetes Engine clusters in the same subnet. The IPs available for the nodes are exhausted, and you want to ensure that the clusters can grow in nodes when needed. What should you do?

- A. Create a new subnet in the same region as the subnet being used.
- B. Add an alias IP range to the subnet used by the GKE clusters.
- C. Create a new VPC, and set up VPC peering with the existing VPC.
- D. Expand the CIDR range of the relevant subnet for the cluster.

**Answer:** D

**Explanation:**

gcloud compute networks subnets expand-ip-range NAME gcloud compute networks subnets expand-ip-range  
 - expand the IP range of a Compute Engine subnetwork <https://cloud.google.com/sdk/gcloud/reference/compute/networks/subnets/expand-ip-range>

**NEW QUESTION 197**

You are hosting an application from Compute Engine virtual machines (VMs) in us-central1-a. You want to adjust your design to support the failure of a single Compute Engine zone, eliminate downtime, and minimize cost. What should you do?

- A. – Create Compute Engine resources in us-central1-b.–Balance the load across both us-central1-a and us-central1-b.
- B. – Create a Managed Instance Group and specify us-central1-a as the zone.–Configure the Health Check with a short Health Interval.
- C. – Create an HTTP(S) Load Balancer.–Create one or more global forwarding rules to direct traffic to your VMs.
- D. – Perform regular backups of your application.–Create a Cloud Monitoring Alert and be notified if your application becomes unavailable.–Restore from backups when notified.

**Answer: A**

**Explanation:**

Choosing a region and zone You choose which region or zone hosts your resources, which controls where your data is stored and used. Choosing a region and zone is important for several reasons:

Handling failures

Distribute your resources across multiple zones and regions to tolerate outages. Google designs zones to be independent from each other: a zone usually has power, cooling, networking, and control planes that are isolated from other zones, and most single failure events will affect only a single zone. Thus, if a zone becomes unavailable, you can transfer traffic to another zone in the same region to keep your services running. Similarly, if a region experiences any disturbances, you should have backup services running in a different region. For more information about distributing your resources and designing a robust system, see *Designing Robust Systems*. Decreased network latency To decrease network latency, you might want to choose a region or zone that is close to your point of service.

[https://cloud.google.com/compute/docs/regions-zones#choosing\\_a\\_region\\_and\\_zone](https://cloud.google.com/compute/docs/regions-zones#choosing_a_region_and_zone)

**NEW QUESTION 198**

Your company publishes large files on an Apache web server that runs on a Compute Engine instance. The Apache web server is not the only application running in the project. You want to receive an email when the egress network costs for the server exceed 100 dollars for the current month as measured by Google Cloud Platform (GCP). What should you do?

- A. Set up a budget alert on the project with an amount of 100 dollars, a threshold of 100%, and notification type of “email.”
- B. Set up a budget alert on the billing account with an amount of 100 dollars, a threshold of 100%, and notification type of “email.”
- C. Export the billing data to BigQuery
- D. Create a Cloud Function that uses BigQuery to sum the egress network costs of the exported billing data for the Apache web server for the current month and sends an email if it is over 100 dollar
- E. Schedule the Cloud Function using Cloud Scheduler to run hourly.
- F. Use the Stackdriver Logging Agent to export the Apache web server logs to Stackdriver Logging.Create a Cloud Function that uses BigQuery to parse the HTTP response log data in Stackdriver for the current month and sends an email if the size of all HTTP responses, multiplied by current GCP egress prices, totals over 100 dollar
- G. Schedule the Cloud Function using Cloud Scheduler to run hourly.

**Answer: C**

**Explanation:**

<https://blog.doit-intl.com/the-truth-behind-google-cloud-egress-traffic-6e8f57b5c2f8>

**NEW QUESTION 200**

You need to assign a Cloud Identity and Access Management (Cloud IAM) role to an external auditor. The auditor needs to have permissions to review your Google Cloud Platform (GCP) Audit Logs and also to review your Data Access logs. What should you do?

- A. Assign the auditor the IAM role roles/logging.privateLogViewe
- B. Perform the export of logs to Cloud Storage.
- C. Assign the auditor the IAM role roles/logging.privateLogViewe
- D. Direct the auditor to also review the logs for changes to Cloud IAM policy.
- E. Assign the auditor’s IAM user to a custom role that has logging.privateLogEntries.list permissio
- F. Perform the export of logs to Cloud Storage.
- G. Assign the auditor’s IAM user to a custom role that has logging.privateLogEntries.list permissio
- H. Direct the auditor to also review the logs for changes to Cloud IAM policy.

**Answer: B**

**Explanation:**

Google Cloud provides Cloud Audit Logs, which is an integral part of Cloud Logging. It consists of two log streams for each project: Admin Activity and Data Access, which are generated by Google Cloud services to help you answer the question of who did what, where, and when? within your Google Cloud projects. Ref: [https://cloud.google.com/iam/docs/job-functions/auditing#scenario\\_external\\_auditors](https://cloud.google.com/iam/docs/job-functions/auditing#scenario_external_auditors)

**NEW QUESTION 201**

You are using Deployment Manager to create a Google Kubernetes Engine cluster. Using the same Deployment Manager deployment, you also want to create a DaemonSet in the kube-system namespace of the cluster. You want a solution that uses the fewest possible services. What should you do?

- A. Add the cluster’s API as a new Type Provider in Deployment Manager, and use the new type to create the DaemonSet.
- B. Use the Deployment Manager Runtime Configurator to create a new Config resource that contains the DaemonSet definition.
- C. With Deployment Manager, create a Compute Engine instance with a startup script that uses kubectl to create the DaemonSet.
- D. In the cluster’s definition in Deployment Manager, add a metadata that has kube-system as key and the DaemonSet manifest as value.

**Answer: A**

**Explanation:**

Adding an API as a type provider

This page describes how to add an API to Google Cloud Deployment Manager as a type provider. To learn more about types and type providers, read the Types overview documentation.

A type provider exposes all of the resources of a third-party API to Deployment Manager as base types that you can use in your configurations. These types must be directly served by a RESTful API that supports Create, Read, Update, and Delete (CRUD).

If you want to use an API that is not automatically provided by Google with Deployment Manager, you must add the API as a type provider.

<https://cloud.google.com/deployment-manager/docs/configuration/type-providers/creating-type-provider>

**NEW QUESTION 206**

Your company has a large quantity of unstructured data in different file formats. You want to perform ETL transformations on the data. You need to make the data accessible on Google Cloud so it can be processed by a Dataflow job. What should you do?

- A. Upload the data to BigQuery using the bq command line tool.
- B. Upload the data to Cloud Storage using the gsutil command line tool.
- C. Upload the data into Cloud SQL using the import function in the console.
- D. Upload the data into Cloud Spanner using the import function in the console.

**Answer: B**

**Explanation:**

"large quantity" : Cloud Storage or BigQuery "files" a file is nothing but an Object

**NEW QUESTION 208**

You have a Linux VM that must connect to Cloud SQL. You created a service account with the appropriate access rights. You want to make sure that the VM uses this service account instead of the default Compute Engine service account. What should you do?

- A. When creating the VM via the web console, specify the service account under the 'Identity and API Access' section.
- B. Download a JSON Private Key for the service account
- C. On the Project Metadata, add that JSON as the value for the key compute-engine-service-account.
- D. Download a JSON Private Key for the service account
- E. On the Custom Metadata of the VM, add that JSON as the value for the key compute-engine-service-account.
- F. Download a JSON Private Key for the service account
- G. After creating the VM, ssh into the VM and save the JSON under `~/gcloud/compute-engine-service-account.json`.

**Answer: A**

**NEW QUESTION 210**

You have a development project with appropriate IAM roles defined. You are creating a production project and want to have the same IAM roles on the new project, using the fewest possible steps. What should you do?

- A. Use `gcloud iam roles copy` and specify the production project as the destination project.
- B. Use `gcloud iam roles copy` and specify your organization as the destination organization.
- C. In the Google Cloud Platform Console, use the 'create role from role' functionality.
- D. In the Google Cloud Platform Console, use the 'create role' functionality and select all applicable permissions.

**Answer: A**

**NEW QUESTION 212**

You have downloaded and installed the `gcloud` command line interface (CLI) and have authenticated with your Google Account. Most of your Compute Engine instances in your project run in the `eu-west1-d` zone. You want to avoid having to specify this zone with each CLI command when managing these instances. What should you do?

- A. Set the `eu-west1-d` zone as the default zone using the `gcloud config` subcommand.
- B. In the Settings page for Compute Engine under Default location, set the zone to `eu-west1-d`.
- C. In the CLI installation directory, create a file called `default.conf` containing `zone=eu-west1-d`.
- D. Create a Metadata entry on the Compute Engine page with key `compute/zone` and value `eu-west1-d`.

**Answer: A**

**Explanation:**

Change your default zone and region in the metadata server Note: This only applies to the default configuration. You can change the default zone and region in your metadata server by making a request to the metadata server. For example: `gcloud compute project-info add-metadata --metadata google-compute-default-region=eu-west1,google-compute-default-zone=eu-west1-b` The `gcloud` command-line tool only picks up on new default zone and region changes after you rerun the `gcloud init` command. After updating your default metadata, run `gcloud init` to reinitialize your default configuration.

[https://cloud.google.com/compute/docs/gcloud-compute#change\\_your\\_default\\_zone\\_and\\_region\\_in\\_the\\_metad](https://cloud.google.com/compute/docs/gcloud-compute#change_your_default_zone_and_region_in_the_metad)

**NEW QUESTION 215**

You want to configure an SSH connection to a single Compute Engine instance for users in the `dev1` group. This instance is the only resource in this particular Google Cloud Platform project that the `dev1` users should be able to connect to. What should you do?

- A. Set metadata to `enable-oslogin=true` for the instance
- B. Grant the `dev1` group the `compute.osLogin` role. Direct them to use the Cloud Shell to ssh to that instance.
- C. Set metadata to `enable-oslogin=true` for the instance
- D. Set the service account to no service account for that instance
- E. Direct them to use the Cloud Shell to ssh to that instance.
- F. Enable block project wide keys for the instance
- G. Generate an SSH key for each user in the `dev1` group. Distribute the keys to `dev1` users and direct them to use their third-party tools to connect.

- H. Enable block project wide keys for the instanc
- I. Generate an SSH key and associate the key with that instanc
- J. Distribute the key to dev1 users and direct them to use their third-party tools to connect.

**Answer:** A

#### NEW QUESTION 220

Your company uses a large number of Google Cloud services centralized in a single project. All teams have specific projects for testing and development. The DevOps team needs access to all of the production services in order to perform their job. You want to prevent Google Cloud product changes from broadening their permissions in the future. You want to follow Google-recommended practices. What should you do?

- A. Grant all members of the DevOps team the role of Project Editor on the organization level.
- B. Grant all members of the DevOps team the role of Project Editor on the production project.
- C. Create a custom role that combines the required permission
- D. Grant the DevOps team the custom role on the production project.
- E. Create a custom role that combines the required permission
- F. Grant the DevOps team the custom role on the organization level.

**Answer:** C

#### Explanation:

Understanding IAM custom roles

Key Point: Custom roles enable you to enforce the principle of least privilege, ensuring that the user and service accounts in your organization have only the permissions essential to performing their intended functions.

Basic concepts

Custom roles are user-defined, and allow you to bundle one or more supported permissions to meet your specific needs. Custom roles are not maintained by Google; when new permissions, features, or services are added to Google Cloud, your custom roles will not be updated automatically.

When you create a custom role, you must choose an organization or project to create it in. You can then grant the custom role on the organization or project, as well as any resources within that organization or project.

[https://cloud.google.com/iam/docs/understanding-custom-roles#basic\\_concepts](https://cloud.google.com/iam/docs/understanding-custom-roles#basic_concepts)

#### NEW QUESTION 223

You are working with a user to set up an application in a new VPC behind a firewall. The user is concerned about data egress. You want to configure the fewest open egress ports. What should you do?

- A. Set up a low-priority (65534) rule that blocks all egress and a high-priority rule (1000) that allows only the appropriate ports.
- B. Set up a high-priority (1000) rule that pairs both ingress and egress ports.
- C. Set up a high-priority (1000) rule that blocks all egress and a low-priority (65534) rule that allows only the appropriate ports.
- D. Set up a high-priority (1000) rule to allow the appropriate ports.

**Answer:** A

#### Explanation:

Implied rules Every VPC network has two implied firewall rules. These rules exist, but are not shown in the Cloud Console: Implied allow egress rule. An egress rule whose action is allow, destination is 0.0.0.0/0, and priority is the lowest possible (65535) lets any instance send traffic to any destination, except for traffic blocked by Google Cloud. A higher priority firewall rule may restrict outbound access. Internet access is allowed if no other firewall rules deny outbound traffic and if the instance has an external IP address or uses a Cloud NAT instance. For more information, see Internet access requirements. Implied deny ingress rule. An ingress rule whose action is deny, source is 0.0.0.0/0, and priority is the lowest possible (65535) protects all instances by blocking incoming connections to them. A higher priority rule might allow incoming access. The default network includes some additional rules that override this one, allowing certain types of incoming connections. [https://cloud.google.com/vpc/docs/firewalls#default\\_firewall\\_rules](https://cloud.google.com/vpc/docs/firewalls#default_firewall_rules)

#### NEW QUESTION 225

You need to create an autoscaling managed instance group for an HTTPS web application. You want to make sure that unhealthy VMs are recreated. What should you do?

- A. Create a health check on port 443 and use that when creating the Managed Instance Group.
- B. Select Multi-Zone instead of Single-Zone when creating the Managed Instance Group.
- C. In the Instance Template, add the label 'health-check'.
- D. In the Instance Template, add a startup script that sends a heartbeat to the metadata server.

**Answer:** A

#### Explanation:

[https://cloud.google.com/compute/docs/instance-groups/autohealing-instances-in-migs#setting\\_up\\_an\\_autoheali](https://cloud.google.com/compute/docs/instance-groups/autohealing-instances-in-migs#setting_up_an_autoheali)

#### NEW QUESTION 226

You need to configure IAM access audit logging in BigQuery for external auditors. You want to follow Google-recommended practices. What should you do?

- A. Add the auditors group to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- B. Add the auditors group to two new custom IAM roles.
- C. Add the auditor user accounts to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- D. Add the auditor user accounts to two new custom IAM roles.

**Answer:** A

#### Explanation:

[https://cloud.google.com/iam/docs/job-functions/auditing#scenario\\_external\\_auditors](https://cloud.google.com/iam/docs/job-functions/auditing#scenario_external_auditors)

Because if you directly add users to the IAM roles, then if any users left the organization then you have to remove the users from multiple places and need to revoke his/her access from multiple places. But, if you put a user into a group then its very easy to manage these type of situations. Now, if any user left then you

just need to remove the user from the group and all the access got revoked

The organization creates a Google group for these external auditors and adds the current auditor to the group. This group is monitored and is typically granted access to the dashboard application. During normal access, the auditors' Google group is only granted access to view the historic logs stored in BigQuery. If any anomalies are discovered, the group is granted permission to view the actual Cloud Logging Admin Activity logs via the dashboard's elevated access mode. At the end of each audit period, the group's access is then revoked. Data is redacted using Cloud DLP before being made accessible for viewing via the dashboard application. The table below explains IAM logging roles that an Organization Administrator can grant to the service account used by the dashboard, as well as the resource level at which the role is granted.

#### NEW QUESTION 229

You want to configure 10 Compute Engine instances for availability when maintenance occurs. Your requirements state that these instances should attempt to automatically restart if they crash. Also, the instances should be highly available including during system maintenance. What should you do?

- A. Create an instance template for the instance
- B. Set the 'Automatic Restart' to o
- C. Set the 'On-host maintenance' to Migrate VM instanc
- D. Add the instance template to an instance group.
- E. Create an instance template for the instance
- F. Set 'Automatic Restart' to of
- G. Set 'On-host maintenance' to Terminate VM instance
- H. Add the instance template to an instance group.
- I. Create an instance group for the instance
- J. Set the 'Autohealing' health check to healthy (HTTP).
- K. Create an instance group for the instanc
- L. Verify that the 'Advanced creation options' setting for 'do not retry machine creation' is set to off.

**Answer:** A

#### Explanation:

Create an instance template for the instances so VMs have same specs. Set the "Automatic Restart" to on to VM automatically restarts upon crash. Set the "On-host maintenance" to Migrate VM instance. This will take care of VM during maintenance window. It will migrate VM instance making it highly available Add the instance template to an instance group so instances can be managed.

- onHostMaintenance: Determines the behavior when a maintenance event occurs that might cause your instance to reboot.
- [Default] MIGRATE, which causes Compute Engine to live migrate an instance when there is a maintenance event.
- TERMINATE, which stops an instance instead of migrating it.
- automaticRestart: Determines the behavior when an instance crashes or is stopped by the system.
- [Default] true, so Compute Engine restarts an instance if the instance crashes or is stopped.
- false, so Compute Engine does not restart an instance if the instance crashes or is stopped.

Enabling automatic restart ensures that compute engine instances are automatically restarted when they crash. And Enabling Migrate VM Instance enables live migrates i.e. compute instances are migrated during system maintenance and remain running during the migration.

Automatic Restart If your instance is set to terminate when there is a maintenance event, or if your instance crashes because of an underlying hardware issue, you can set up Compute Engine to automatically restart the instance by setting the automaticRestart field to true. This setting does not apply if the instance is taken offline through a user action, such as calling sudo shutdown, or during a zone

outage.Ref: <https://cloud.google.com/compute/docs/instances/setting-instance-scheduling-options#autorestart>

Enabling the Migrate VM Instance option migrates your instance away from an infrastructure maintenance event, and your instance remains running during the migration. Your instance might experience a short period of decreased performance, although generally, most instances should not notice any difference. This is ideal for instances that require constant uptime and can tolerate a short period of decreased

performance.Ref: [https://cloud.google.com/compute/docs/instances/setting-instance-scheduling-options#live\\_](https://cloud.google.com/compute/docs/instances/setting-instance-scheduling-options#live_)

#### NEW QUESTION 232

You need to deploy an application, which is packaged in a container image, in a new project. The application exposes an HTTP endpoint and receives very few requests per day. You want to minimize costs. What should you do?

- A. Deploy the container on Cloud Run.
- B. Deploy the container on Cloud Run on GKE.
- C. Deploy the container on App Engine Flexible.
- D. Deploy the container on Google Kubernetes Engine, with cluster autoscaling and horizontal pod autoscaling enabled.

**Answer:** A

#### Explanation:

Cloud Run takes any container images and pairs great with the container ecosystem: Cloud Build, Artifact Registry, Docker. ... No infrastructure to manage: once deployed, Cloud Run manages your services so you can sleep well. Fast autoscaling. Cloud Run automatically scales up or down from zero to N depending on traffic.

<https://cloud.google.com/run>

#### NEW QUESTION 234

Your company has developed a new application that consists of multiple microservices. You want to deploy the application to Google Kubernetes Engine (GKE), and you want to ensure that the cluster can scale as more applications are deployed in the future. You want to avoid manual intervention when each new application is deployed. What should you do?

- A. Deploy the application on GKE, and add a HorizontalPodAutoscaler to the deployment.
- B. Deploy the application on GKE, and add a VerticalPodAutoscaler to the deployment.
- C. Create a GKE cluster with autoscaling enabled on the node pool
- D. Set a minimum and maximum for the size of the node pool.
- E. Create a separate node pool for each application, and deploy each application to its dedicated node pool.

**Answer:** C

#### Explanation:

[https://cloud.google.com/kubernetes-engine/docs/how-to/cluster-autoscaler#adding\\_a\\_node\\_pool\\_with\\_autoscal](https://cloud.google.com/kubernetes-engine/docs/how-to/cluster-autoscaler#adding_a_node_pool_with_autoscal)

#### NEW QUESTION 235

You are running multiple microservices in a Kubernetes Engine cluster. One microservice is rendering images. The microservice responsible for the image rendering requires a large amount of CPU time compared to the memory it requires. The other microservices are workloads that are optimized for n1-standard machine types. You need to optimize your cluster so that all workloads are using resources as efficiently as possible. What should you do?

- A. Assign the pods of the image rendering microservice a higher pod priority than the other microservices
- B. Create a node pool with compute-optimized machine type nodes for the image rendering microservice Use the node pool with general-purpose machine type nodes for the other microservices
- C. Use the node pool with general-purpose machine type nodes for the image rendering microservice Create a nodepool with compute-optimized machine type nodes for the other microservices
- D. Configure the required amount of CPU and memory in the resource requests specification of the image rendering microservice deployment Keep the resource requests for the other microservices at the default

**Answer: B**

#### NEW QUESTION 237

You need to create a new billing account and then link it with an existing Google Cloud Platform project. What should you do?

- A. Verify that you are Project Billing Manager for the GCP project
- B. Update the existing project to link it to the existing billing account.
- C. Verify that you are Project Billing Manager for the GCP project
- D. Create a new billing account and link the new billing account to the existing project.
- E. Verify that you are Billing Administrator for the billing account
- F. Create a new project and link the new project to the existing billing account.
- G. Verify that you are Billing Administrator for the billing account
- H. Update the existing project to link it to the existing billing account.

**Answer: B**

#### Explanation:

Billing Administrators can not create a new billing account, and the project is presumably already created. Project Billing Manager allows you to link the created billing account to the project. It is vague on how the billing account gets created but by process of elimination

#### NEW QUESTION 239

You are developing a new web application that will be deployed on Google Cloud Platform. As part of your release cycle, you want to test updates to your application on a small portion of real user traffic. The majority of the users should still be directed towards a stable version of your application. What should you do?

- A. Deploy the application on App Engine For each update, create a new version of the same service Configure traffic splitting to send a small percentage of traffic to the new version
- B. Deploy the application on App Engine For each update, create a new service Configure traffic splitting to send a small percentage of traffic to the new service.
- C. Deploy the application on Kubernetes Engine For a new release, update the deployment to use the new version
- D. Deploy the application on Kubernetes Engine For a new release, create a new deployment for the new version Update the service to use the new deployment.

**Answer: A**

#### Explanation:

Keyword, Version, traffic splitting, App Engine supports traffic splitting for versions before releasing.

#### NEW QUESTION 244

You have a batch workload that runs every night and uses a large number of virtual machines (VMs). It is fault-tolerant and can tolerate some of the VMs being terminated. The current cost of VMs is too high. What should you do?

- A. Run a test using simulated maintenance event
- B. If the test is successful, use preemptible N1 Standard VMs when running future jobs.
- C. Run a test using simulated maintenance event
- D. If the test is successful, use N1 Standard VMs when running future jobs.
- E. Run a test using a managed instance group
- F. If the test is successful, use N1 Standard VMs in the managed instance group when running future jobs.
- G. Run a test using N1 standard VMs instead of N2. If the test is successful, use N1 Standard VMs when running future jobs.

**Answer: A**

#### Explanation:

Creating and starting a preemptible VM instance This page explains how to create and use a preemptible virtual machine (VM) instance. A preemptible instance is an instance you can create and run at a much lower price than normal instances. However, Compute Engine might terminate (preempt) these instances if it requires access to those resources for other tasks. Preemptible instances will always terminate after 24 hours. To learn more about preemptible instances, read the preemptible instances documentation. Preemptible instances are recommended only for fault-tolerant applications that can withstand instance preemptions. Make sure your application can handle preemptions before you decide to create a preemptible instance. To understand the risks and value of preemptible instances, read the preemptible instances documentation. <https://cloud.google.com/compute/docs/instances/create-start-preemptible-instance>

#### NEW QUESTION 247

Your finance team wants to view the billing report for your projects. You want to make sure that the finance team does not get additional permissions to the project. What should you do?

- A. Add the group for the finance team to roles/billing user role.
- B. Add the group for the finance team to roles/billing admin role.

- C. Add the group for the finance team to roles/billing viewer role.
- D. Add the group for the finance team to roles/billing project/Manager role.

**Answer:** C

**Explanation:**

"Billing Account Viewer access would usually be granted to finance teams, it provides access to spend information, but does not confer the right to link or unlink projects or otherwise manage the properties of the billing account." <https://cloud.google.com/billing/docs/how-to/billing-access>

**NEW QUESTION 252**

Your organization needs to grant users access to query datasets in BigQuery but prevent them from accidentally deleting the datasets. You want a solution that follows Google-recommended practices. What should you do?

- A. Add users to roles/bigquery user role only, instead of roles/bigquery dataOwner.
- B. Add users to roles/bigquery dataEditor role only, instead of roles/bigquery dataOwner.
- C. Create a custom role by removing delete permissions, and add users to that role only.
- D. Create a custom role by removing delete permission
- E. Add users to the group, and then add the group to the custom role.

**Answer:** D

**Explanation:**

[https://cloud.google.com/bigquery/docs/access-control#custom\\_roles](https://cloud.google.com/bigquery/docs/access-control#custom_roles)

Custom roles enable you to enforce the principle of least privilege, ensuring that the user and service accounts in your organization have only the permissions essential to performing their intended functions.

**NEW QUESTION 256**

You need to create a custom IAM role for use with a GCP service. All permissions in the role must be suitable for production use. You also want to clearly share with your organization the status of the custom role. This will be the first version of the custom role. What should you do?

- A. Use permissions in your role that use the 'supported' support level for role permission
- B. Set the role stage to ALPHA while testing the role permissions.
- C. Use permissions in your role that use the 'supported' support level for role permission
- D. Set the role stage to BETA while testing the role permissions.
- E. Use permissions in your role that use the 'testing' support level for role permission
- F. Set the role stage to ALPHA while testing the role permissions.
- G. Use permissions in your role that use the 'testing' support level for role permission
- H. Set the role stage to BETA while testing the role permissions.

**Answer:** A

**Explanation:**

When setting support levels for permissions in custom roles, you can set to one of SUPPORTED, TESTING or NOT\_SUPPORTED.

Ref: <https://cloud.google.com/iam/docs/custom-roles-permissions-support>

**NEW QUESTION 260**

Every employee of your company has a Google account. Your operational team needs to manage a large number of instances on Compute Engine. Each member of this team needs only administrative access to the servers. Your security team wants to ensure that the deployment of credentials is operationally efficient and must be able to determine who accessed a given instance. What should you do?

- A. Generate a new SSH key pair
- B. Give the private key to each member of your team
- C. Configure the public key in the metadata of each instance.
- D. Ask each member of the team to generate a new SSH key pair and to send you their public key
- E. Use a configuration management tool to deploy those keys on each instance.
- F. Ask each member of the team to generate a new SSH key pair and to add the public key to their Google account
- G. Grant the "compute.osAdminLogin" role to the Google group corresponding to this team.
- H. Generate a new SSH key pair
- I. Give the private key to each member of your team
- J. Configure the public key as a project-wide public SSH key in your Cloud Platform project and allow project-wide public SSH keys on each instance.

**Answer:** C

**Explanation:**

<https://cloud.google.com/compute/docs/instances/managing-instance-access>

**NEW QUESTION 261**

You are using Data Studio to visualize a table from your data warehouse that is built on top of BigQuery. Data is appended to the data warehouse during the day. At night, the daily summary is recalculated by overwriting the table. You just noticed that the charts in Data Studio are broken, and you want to analyze the problem. What should you do?

- A. Use the BigQuery interface to review the nightly Job and look for any errors
- B. Review the Error Reporting page in the Cloud Console to find any errors.
- C. In Cloud Logging create a filter for your Data Studio report
- D. Use Cloud Debugger to find out why the data was not refreshed correctly

**Answer:** D

**Explanation:**

Cloud Debugger helps inspect the state of an application, at any code location, without stopping or slowing down the running app // <https://cloud.google.com/debugger/docs>

#### NEW QUESTION 265

You recently deployed a new version of an application to App Engine and then discovered a bug in the release. You need to immediately revert to the prior version of the application. What should you do?

- A. Run `gcloud app restore`.
- B. On the App Engine page of the GCP Console, select the application that needs to be reverted and click Revert.
- C. On the App Engine Versions page of the GCP Console, route 100% of the traffic to the previous version.
- D. Deploy the original version as a separate application.
- E. Then go to App Engine settings and split traffic between applications so that the original version serves 100% of the requests.

**Answer: C**

#### NEW QUESTION 269

You are running an application on multiple virtual machines within a managed instance group and have autoscaling enabled. The autoscaling policy is configured so that additional instances are added to the group if the CPU utilization of instances goes above 80%. VMs are added until the instance group reaches its maximum limit of five VMs or until CPU utilization of instances lowers to 80%. The initial delay for HTTP health checks against the instances is set to 30 seconds. The virtual machine instances take around three minutes to become available for users. You observe that when the instance group autoscales, it adds more instances than necessary to support the levels of end-user traffic. You want to properly maintain instance group sizes when autoscaling. What should you do?

- A. Set the maximum number of instances to 1.
- B. Decrease the maximum number of instances to 3.
- C. Use a TCP health check instead of an HTTP health check.
- D. Increase the initial delay of the HTTP health check to 200 seconds.

**Answer: D**

#### Explanation:

The reason is that when you do health check, you want the VM to be working. Do the first check after initial setup time of 3 mins = 180 s < 200 s is reasonable.

➤ The reason why our autoscaling is adding more instances than needed is that it checks 30 seconds after launching the instance and at this point, the instance isn't up and isn't ready to serve traffic. So our autoscaling policy starts another instance again checks this after 30 seconds and the cycle repeats until it gets to the maximum instances or the instances launched earlier are healthy and start processing traffic which happens after 180 seconds (3 minutes). This can be easily rectified by adjusting the initial delay to be higher than the time it takes for the instance to become available for processing traffic. So setting this to 200 ensures that it waits until the instance is up (around 180-second mark) and then starts forwarding traffic to this instance. Even after a cool out period, if the CPU utilization is still high, the autoscaler can again scale up but this scale-up is genuine and is based on the actual load.

Initial Delay Seconds This setting delays autohealing from potentially prematurely recreating the instance if the instance is in the process of starting up. The initial delay timer starts when the `currentAction` of the instance is `VERIFYING`. Ref: <https://cloud.google.com/compute/docs/instance-groups/autohealing-instances-in-migs>

#### NEW QUESTION 270

You are managing a project for the Business Intelligence (BI) department in your company. A data pipeline ingests data into BigQuery via streaming. You want the users in the BI department to be able to run the custom SQL queries against the latest data in BigQuery. What should you do?

- A. Create a Data Studio dashboard that uses the related BigQuery tables as a source and give the BI team view access to the Data Studio dashboard.
- B. Create a Service Account for the BI team and distribute a new private key to each member of the BI team.
- C. Use Cloud Scheduler to schedule a batch Dataflow job to copy the data from BigQuery to the BI team's internal data warehouse.
- D. Assign the IAM role of BigQuery User to a Google Group that contains the members of the BI team.

**Answer: D**

#### Explanation:

When applied to a dataset, this role provides the ability to read the dataset's metadata and list tables in the dataset. When applied to a project, this role also provides the ability to run jobs, including queries, within the project. A member with this role can enumerate their own jobs, cancel their own jobs, and enumerate datasets within a project. Additionally, allows the creation of new datasets within the project; the creator is granted the BigQuery Data Owner role (`roles/bigquery.dataOwner`) on these new datasets.

<https://cloud.google.com/bigquery/docs/access-control>

#### NEW QUESTION 271

You want to configure a solution for archiving data in a Cloud Storage bucket. The solution must be cost-effective. Data with multiple versions should be archived after 30 days. Previous versions are accessed once a month for reporting. This archive data is also occasionally updated at month-end. What should you do?

- A. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Coldline Storage.
- B. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Nearline Storage.
- C. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Coldline Storage.
- D. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Nearline Storage.

**Answer: B**

#### NEW QUESTION 273

You need to reduce GCP service costs for a division of your company using the fewest possible steps. You need to turn off all configured services in an existing GCP project. What should you do?

- A. \* 1. Verify that you are assigned the Project Owners IAM role for this project.\* 2. Locate the project in the GCP console, click Shut down and then enter the project ID.
- B. \* 1. Verify that you are assigned the Project Owners IAM role for this project.\* 2. Switch to the project in the GCP console, locate the resources and delete them.
- C. \* 1. Verify that you are assigned the Organizational Administrator IAM role for this project.\* 2. Locate the project in the GCP console, enter the project ID and then click Shut down.
- D. \* 1. Verify that you are assigned the Organizational Administrators IAM role for this project.\* 2. Switch to the project in the GCP console, locate the resources and delete them.

**Answer:** A

**Explanation:**

<https://cloud.google.com/run/docs/tutorials/gcloud> <https://cloud.google.com/resource-manager/docs/creating-managing-projects>

[https://cloud.google.com/iam/docs/understanding-roles#primitive\\_roles](https://cloud.google.com/iam/docs/understanding-roles#primitive_roles)

You can shut down projects using the Cloud Console. When you shut down a project, this immediately happens: All billing and traffic serving stops, You lose access to the project, The owners of the project will be notified and can stop the deletion within 30 days, The project will be scheduled to be deleted after 30 days. However, some resources may be deleted much earlier.

**NEW QUESTION 278**

Your company is moving from an on-premises environment to Google Cloud Platform (GCP). You have multiple development teams that use Cassandra environments as backend databases. They all need a development environment that is isolated from other Cassandra instances. You want to move to GCP quickly and with minimal support effort. What should you do?

- A. \* 1. Build an instruction guide to install Cassandra on GCP.\* 2. Make the instruction guide accessible to your developers.
- B. \* 1. Advise your developers to go to Cloud Marketplace.\* 2. Ask the developers to launch a Cassandra image for their development work.
- C. \* 1. Build a Cassandra Compute Engine instance and take a snapshot of it.\* 2. Use the snapshot to create instances for your developers.
- D. \* 1. Build a Cassandra Compute Engine instance and take a snapshot of it.\* 2. Upload the snapshot to Cloud Storage and make it accessible to your developers.\* 3. Build instructions to create a Compute Engine instance from the snapshot so that developers can do it themselves.

**Answer:** B

**Explanation:**

<https://medium.com/google-cloud/how-to-deploy-cassandra-and-connect-on-google-cloud-platform-with-a-few->

<https://cloud.google.com/blog/products/databases/open-source-cassandra-now-managed-on-google-cloud> <https://cloud.google.com/marketplace>

You can deploy Cassandra as a Service, called Astra, on the Google Cloud Marketplace. Not only do you get a unified bill for all GCP services, your Developers can now create Cassandra clusters on Google Cloud in minutes and build applications with Cassandra as a database as a service without the operational overhead of managing Cassandra

**NEW QUESTION 280**

.....

## **Thank You for Trying Our Product**

### **We offer two products:**

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### **Associate-Cloud-Engineer Practice Exam Features:**

- \* Associate-Cloud-Engineer Questions and Answers Updated Frequently
- \* Associate-Cloud-Engineer Practice Questions Verified by Expert Senior Certified Staff
- \* Associate-Cloud-Engineer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* Associate-Cloud-Engineer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The Associate-Cloud-Engineer Practice Test Here](#)**