

EC-Council

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)



NEW QUESTION 1

jane, an ethical hacker. Is testing a target organization's web server and website to identify security loopholes. In this process, she copied the entire website and its content on a local drive to view the complete profile of the site's directory structure, file structure, external links, images, web pages, and so on. This information helps jane map the website's directories and gain valuable information. What is the attack technique employed by Jane in the above scenario?

- A. website mirroring
- B. Session hijacking
- C. Web cache poisoning
- D. Website defacement

Answer: A

Explanation:

A mirror site may be a website or set of files on a computer server that has been copied to a different computer server in order that the location or files are available from quite one place. A mirror site has its own URL, but is otherwise just like the principal site. Load-balancing devices allow high-volume sites to scale easily, dividing the work between multiple mirror sites. A mirror site is typically updated frequently to make sure it reflects the contents of the first site. In some cases, the first site may arrange for a mirror site at a bigger location with a better speed connection and, perhaps, a better proximity to an outsized audience. If the first site generates an excessive amount of traffic, a mirror site can ensure better availability of the web site or files. For websites that provide copies or updates of widely used software, a mirror site allows the location to handle larger demands and enables the downloaded files to arrive more quickly. Microsoft, Sun Microsystems and other companies have mirror sites from which their browser software are often downloaded. Mirror sites are wont to make site access faster when the first site could also be geographically distant from those accessing it. A mirrored web server is usually located on a special continent from the principal site, allowing users on the brink of the mirror site to urge faster and more reliable access. Mirroring an internet site also can be done to make sure that information are often made available to places where access could also be unreliable or censored. In 2013, when Chinese authorities blocked access to foreign media outlets just like the Wall Street Journal and Reuters, site mirroring was wont to restore access and circumvent government censorship.

NEW QUESTION 2

A network administrator discovers several unknown files in the root directory of his Linux FTP server. One of the files is a tarball, two are shell script files, and the third is a binary file is named "nc." The FTP server's access logs show that the anonymous user account logged in to the server, uploaded the files, and extracted the contents of the tarball and ran the script using a function provided by the FTP server's software. The "ps" command shows that the "nc" file is running as process, and the netstat command shows the "nc" process is listening on a network port. What kind of vulnerability must be present to make this remote attack possible?

- A. File system permissions
- B. Privilege escalation
- C. Directory traversal
- D. Brute force login

Answer: A

NEW QUESTION 3

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page. What Is the best Linux pipe to achieve your milestone?

- A. `dirb https://site.com | grep "site"`
- B. `curl -s https://sile.com | grep "< a href-\`http" | grep "Site-com- | cut -d "V" -f 2`
- C. `wget https://stte.com | grep "< a href=*http" | grep "site.com"`
- D. `wgethttps://site.com | cut-d"http`

Answer: C

NEW QUESTION 4

Null sessions are un-authenticated connections (not using a username or password.) to an NT or 2000 system. Which TCP and UDP ports must you filter to check null sessions on your network?

- A. 137 and 139
- B. 137 and 443
- C. 139 and 443
- D. 139 and 445

Answer: D

NEW QUESTION 5

An attacker is trying to redirect the traffic of a small office. That office is using their own mail server, DNS server and NTP server because of the importance of their job. The attacker gain access to the DNS server and redirect the direction www.google.com to his own IP address. Now when the employees of the office want to go to Google they are being redirected to the attacker machine. What is the name of this kind of attack?

- A. MAC Flooding
- B. Smurf Attack
- C. DNS spoofing
- D. ARP Poisoning

Answer: C

NEW QUESTION 6

Which of the following incident handling process phases is responsible for defining rules, collaborating human workforce, creating a back-up plan, and testing the plans for an organization?

- A. Preparation phase
- B. Containment phase
- C. Identification phase
- D. Recovery phase

Answer: A

NEW QUESTION 7

Jacob works as a system administrator in an organization. He wants to extract the source code of a mobile application and disassemble the application to analyze its design flaws. Using this technique, he wants to fix any bugs in the application, discover underlying vulnerabilities, and improve defense strategies against attacks.

What is the technique used by Jacob in the above scenario to improve the security of the mobile application?

- A. Reverse engineering
- B. App sandboxing
- C. Jailbreaking
- D. Social engineering

Answer: A

NEW QUESTION 8

The security team of Debry Inc. decided to upgrade Wi-Fi security to thwart attacks such as dictionary attacks and key recovery attacks. For this purpose, the security team started implementing cutting-edge technology that uses a modern key establishment protocol called the simultaneous authentication of equals (SAE), also known as dragonfly key exchange, which replaces the PSK concept. What is the Wi-Fi encryption technology implemented by Debry Inc.?

- A. WEP
- B. WPA
- C. WPA2
- D. WPA3

Answer: C

NEW QUESTION 9

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTICTLS
- B. UPGRADETLS
- C. FORCETLS
- D. STARTTLS

Answer: D

NEW QUESTION 10

A technician is resolving an issue where a computer is unable to connect to the Internet using a wireless access point. The computer is able to transfer files locally to other machines, but cannot successfully reach the Internet. When the technician examines the IP address and default gateway they are both on the 192.168.1.0/24. Which of the following has occurred?

- A. The computer is not using a private IP address.
- B. The gateway is not routing to a public IP address.
- C. The gateway and the computer are not on the same network.
- D. The computer is using an invalid IP address.

Answer: B

NEW QUESTION 10

Internet Protocol Security IPsec is actually a suite of protocols. Each protocol within the suite provides different functionality. Collective IPsec does everything except.

- A. Protect the payload and the headers
- B. Encrypt
- C. Work at the Data Link Layer
- D. Authenticate

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/IPsec> Usage of IPsec Authentication Header format in Tunnel and Transport modes

NEW QUESTION 14

This type of injection attack does not show any error message. It is difficult to exploit as it returns information when the application is given SQL payloads that elicit a true or false response from the server. By observing the response, an attacker can extract sensitive information. What type of attack is this?

- A. Time-based SQL injection
- B. Union SQL injection
- C. Error-based SQL injection

D. Blind SQL injection

Answer: D

NEW QUESTION 15

Which rootkit is characterized by its function of adding code and/or replacing some of the operating-system kernel code to obscure a backdoor on a system?

- A. User-mode rootkit
- B. Library-level rootkit
- C. Kernel-level rootkit
- D. Hypervisor-level rootkit

Answer: C

NEW QUESTION 16

Which of the following represents the initial two commands that an IRC client sends to join an IRC network?

- A. USER, NICK
- B. LOGIN, NICK
- C. USER, PASS
- D. LOGIN, USER

Answer: A

NEW QUESTION 20

The network team has well-established procedures to follow for creating new rules on the firewall. This includes having approval from a manager prior to implementing any new rules. While reviewing the firewall configuration, you notice a recently implemented rule but cannot locate manager approval for it. What would be a good step to have in the procedures for a situation like this?

- A. Have the network team document the reason why the rule was implemented without prior manager approval.
- B. Monitor all traffic using the firewall rule until a manager can approve it.
- C. Do not roll back the firewall rule as the business may be relying upon it, but try to get manager approval as soon as possible.
- D. Immediately roll back the firewall rule until a manager can approve it

Answer: D

NEW QUESTION 23

If a tester is attempting to ping a target that exists but receives no response or a response that states the destination is unreachable, ICMP may be disabled and the network may be using TCP. Which other option could the tester use to get a response from a host using TCP?

- A. Traceroute
- B. Hping
- C. TCP ping
- D. Broadcast ping

Answer: B

Explanation:

<https://tools.kali.org/information-gathering/hping3>

NEW QUESTION 27

Bill has been hired as a penetration tester and cyber security auditor for a major credit card company. Which information security standard is most applicable to his role?

- A. FISMA
- B. HITECH
- C. PCI-DSS
- D. Sarbanes-OxleyAct

Answer: C

NEW QUESTION 28

Bobby, an attacker, targeted a user and decided to hijack and intercept all their wireless communications. He installed a fake communication tower between two authentic endpoints to mislead the victim. Bobby used this virtual tower to interrupt the data transmission between the user and real tower, attempting to hijack an active session, upon receiving the users request. Bobby manipulated the traffic with the virtual tower and redirected the victim to a malicious website. What is the attack performed by Bobby in the above scenario?

- A. Wardriving
- B. KRACK attack
- C. jamming signal attack
- D. aLTEr attack

Answer: D

Explanation:

aLTEr attacks are usually performed on LTE devices Attacker installs a virtual (fake) communication tower between two authentic endpoints intending to mislead

the victim This virtual tower is used to interrupt the data transmission between the user and real tower attempting to hijack the active session.

NEW QUESTION 31

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 33

You are attempting to run an Nmap port scan on a web server. Which of the following commands would result in a scan of common ports with the least amount of noise in order to evade IDS?

- A. nmap -A -Pn
- B. nmap -sP -p-65535 -T5
- C. nmap -sT -O -T0
- D. nmap -A --host-timeout 99 -T1

Answer: C

NEW QUESTION 38

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process. Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network. What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack


Answer: D

Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a "root" switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an attempt to force an STP recalculation. The BPDU sent out announces that the attacker's system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

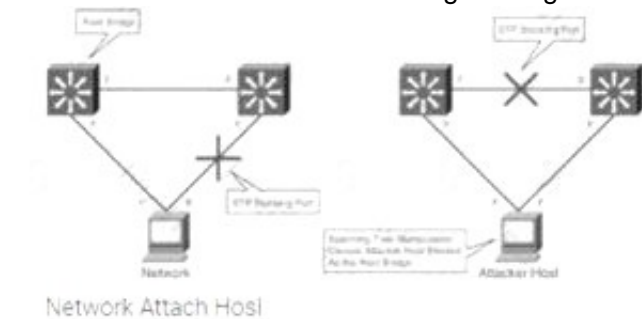

switch

NEW QUESTION 42

To reach a bank web site, the traffic from workstations must pass through a firewall. You have been asked to review the firewall configuration to ensure that workstations in network 10.10.10.0/24 can only reach the bank web site 10.20.20.1 using https. Which of the following firewall rules meets this requirement?

- A. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 443) then permit
- B. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 80 or 443) then permit
- C. If (source matches 10.20.20.1 and destination matches 10.10.10.0/24 and port matches 443) then permit
- D. If (source matches 10.10.10.0 and destination matches 10.20.20.1 and port matches 443) then permit

Answer: A

NEW QUESTION 45

Every company needs a formal written document which spells out to employees precisely what they are allowed to use the company's systems for, what is prohibited, and what will happen to them if they break the rules. Two printed copies of the policy should be given to every employee as soon as possible after they join the organization. The employee should be asked to sign one copy, which should be safely filed by the company. No one should be allowed to use the company's computer systems until they have signed the policy in acceptance of its terms.

What is this document called?

- A. Information Audit Policy (IAP)
- B. Information Security Policy (ISP)

- C. Penetration Testing Policy (PTP)
- D. Company Compliance Policy (CCP)

Answer: B

NEW QUESTION 50

Ethical hacker Jane Smith is attempting to perform an SQL injection attack. She wants to test the response time of a true or false response and wants to use a second command to determine whether the database will return true or false results for user IDs. Which two SQL Injection types would give her the results she is looking for?

- A. Out of band and boolean-based
- B. Time-based and union-based
- C. union-based and error-based
- D. Time-based and boolean-based

Answer: D

Explanation:

“Boolean based” we mean that it is based on Boolean values, that is, true or false / true and false. AND

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Boolean-based (content-based) Blind SQLi

Boolean-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the application to return a different result depending on whether the query returns a TRUE or FALSE result.

Depending on the result, the content within the HTTP response will change, or remain the same. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database, character by character.

Time-based Blind SQLi

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Depending on the result, an HTTP response will be returned with a delay, or returned immediately. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database character by character.

<https://www.acunetix.com/websitesecurity/sql-injection2/>

NEW QUESTION 54

Mason, a professional hacker, targets an organization and spreads Emotet malware through malicious script. After infecting the victim's device, Mason further used Emotet to spread the infection across local networks and beyond to compromise as many machines as possible. In this process, he used a tool, which is a self-extracting RAR file, to retrieve information related to network resources such as writable share drives.

What is the tool employed by Mason in the above scenario?

- A. NetPass.exe
- B. Outlook scraper
- C. WebBrowserPassView
- D. Credential enumerator

Answer: D

NEW QUESTION 59

Which is the first step followed by Vulnerability Scanners for scanning a network?

- A. OS Detection
- B. Firewall detection
- C. TCP/UDP Port scanning
- D. Checking if the remote host is alive

Answer: D

NEW QUESTION 61

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

Answer: BCDE

NEW QUESTION 65

Which of the following tools are used for enumeration? (Choose three.)

- A. SolarWinds
- B. USER2SID
- C. Cheops
- D. SID2USER
- E. DumpSec

Answer: BDE

NEW QUESTION 66

Study the snort rule given below:

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)
```

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4; depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)
```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

Answer: C

NEW QUESTION 70

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Marry found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

Answer: B

NEW QUESTION 74

Heather's company has decided to use a new customer relationship management tool. After performing the appropriate research, they decided to purchase a subscription to a cloud-hosted solution. The only administrative task that Heather will need to perform is the management of user accounts. The provider will take care of the hardware, operating system, and software administration including patching and monitoring. Which of the following is this type of solution?

- A. SaaS
- B. IaaS
- C. CaaS
- D. PasS

Answer: A

Explanation:

Software as a service (SaaS) allows users to attach to and use cloud-based apps over the web. Common examples are email, calendaring and workplace tool (such as Microsoft workplace 365).

SaaS provides a whole software solution that you get on a pay-as-you-go basis from a cloud service provider. You rent the use of an app for your organisation and your users connect with it over the web, typically with an internet browser. All of the underlying infrastructure, middleware, app software system and app knowledge are located within the service provider's knowledge center. The service provider manages the hardware and software system and with the appropriate service agreement, can make sure the availability and also the security of the app and your data as well. SaaS allows your organisation to induce quickly up and running with an app at token upfront cost.

Common SaaS scenariosThis tool having used a web-based email service like Outlook, Hotmail or Yahoo! Mail, then you have got already used a form of SaaS. With these services, you log into your account over the web, typically from an internet browser. the e-mail software system is found on the service provider's network and your messages are held on there moreover. you can access your email and hold on messages from an internet browser on any laptop or Internet-connected device.

The previous examples are free services for personal use. For organisational use, you can rent productivity apps, like email, collaboration and calendaring; and sophisticated business applications like client relationship management (CRM), enterprise resource coming up with (ERP) and document management. You buy the use of those apps by subscription or per the level of use.

Advantages of SaaSGain access to stylish applications. to supply SaaS apps to users, you don't ought to purchase, install, update or maintain any hardware, middleware or software system. SaaS makes even sophisticated enterprise applications, like ERP and CRM, affordable for organisations that lack the resources to shop for, deploy and manage the specified infrastructure and software system themselves.

Pay just for what you utilize. you furthermore may economize because the SaaS service automatically scales up and down per the level of usage.

Use free shopper software system. Users will run most SaaS apps directly from their web browser without needing to transfer and install any software system, though some apps need plugins. this suggests that you simply don't ought to purchase and install special software system for your users.

Mobilise your hands simply. SaaS makes it simple to "mobilise" your hands as a result of users will access SaaS apps and knowledge from any Internet-connected laptop or mobile device. You don't ought to worry concerning developing apps to run on differing types of computers and devices as a result of the service supplier has already done therefore. additionally, you don't ought to bring special experience aboard to manage the safety problems inherent in mobile computing. A fastidiously chosen service supplier can make sure the security of your knowledge, no matter the sort of device intense it.

Access app knowledge from anyplace. With knowledge held on within the cloud, users will access their info from any Internet-connected laptop or mobile device. And once app knowledge is held on within the cloud, no knowledge is lost if a user's laptop or device fails.

NEW QUESTION 79

Steve, a scientist who works in a governmental security agency, developed a technological solution to identify people based on walking patterns and implemented this approach to a physical control access.

A camera captures people walking and identifies the individuals using Steve's approach.

After that, people must approximate their RFID badges. Both the identifications are required to open the door. In this case, we can say:

- A. Although the approach has two phases, it actually implements just one authentication factor
- B. The solution implements the two authentication factors: physical object and physical characteristic
- C. The solution will have a high level of false positives
- D. Biological motion cannot be used to identify people

Answer: B

NEW QUESTION 84

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying
- C. Brute force
- D. Dictionary

Answer: D

Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

NEW QUESTION 88

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

Answer: C

Explanation:

Infoga may be a tool gathering email accounts informations (ip,hostname,country,...) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

NEW QUESTION 92

When you are getting information about a web server, it is very important to know the HTTP Methods (GET, POST, HEAD, PUT, DELETE, TRACE) that are available because there are two critical methods (PUT and DELETE). PUT can upload a file to the server and DELETE can delete a file from the server. You can detect all these methods (GET, POST, HEAD, DELETE, PUT, TRACE) using NMAP script engine. What Nmap script will help you with this task?

- A. http-methods
- B. http enum
- C. http-headers
- D. http-git

Answer: A

NEW QUESTION 97

An unauthorized individual enters a building following an employee through the employee entrance after the lunch rush. What type of breach has the individual just performed?

- A. Reverse Social Engineering
- B. Tailgating
- C. Piggybacking
- D. Announced

Answer: B

NEW QUESTION 102

Bob received this text message on his mobile phone: "Hello, this is Scott Smelby from the Yahoo Bank. Kindly contact me for a vital transaction on: scottsmelby@yahoo.com". Which statement below is true?

- A. This is a scam as everybody can get a @yahoo address, not the Yahoo customer service employees.
- B. This is a scam because Bob does not know Scott.
- C. Bob should write to scottmelby@yahoo.com to verify the identity of Scott.
- D. This is probably a legitimate message as it comes from a respectable organization.

Answer: A

NEW QUESTION 103

Study the following log extract and identify the attack.

```
12/26-07:06:22:31.167035 207.219.207.240:1882 -> 172.16.1.106:80
TCP TTL:13 TTL:50 TOS:0x0 IP:53476 DFF
***AP*** Seq: 0x2BDC107 Ack: 0x1CB9F186 Win: 0x2238 TcpLen: 20
47 45 54 20 2F 6D 73 61 64 63 2F 2E 2E C0 AF 2E GET /msadc/.....
2E 2F 2E 2E C0 AF 2E 2E 2F 2E 2E C0 AF 2E 2E 2F ./...../...../
77 69 6E 6E 74 2F 73 79 73 74 65 6D 33 32 2F 63 winnt/system32/c
6D 64 2E 65 78 65 3F 2F 63 2B 64 69 72 2B 63 3A md.exe?/c+dir+c:
5C 20 48 54 54 50 2F 31 2E 31 0D 0A 41 63 63 65 \ HTTP/1.1..Acce
70 74 3A 20 69 6D 61 67 65 2F 67 69 66 2C 20 69 pt: image/gif, i
6D 61 67 65 2F 78 2D 78 62 69 74 6D 61 70 2C 20 mage/x-xbitmap
69 6D 61 67 65 2F 6A 70 65 67 2C 20 69 6D 61 67 image/jpeg, imag
65 2F 70 6A 70 65 67 2C 20 61 70 70 6C 69 63 61 e/jpeg, applica
74 69 6F 6E 2F 76 6E 64 2E 6D 73 2D 65 78 63 65 tion/vnd.ms-exce
6C 2C 20 61 70 70 6C 69 63 61 74 69 6F 6E 2F 6D l, application/m
73 77 6F 72 64 2C 20 61 70 70 6C 69 63 61 74 69 sword, applicati
6F 6E 2F 76 6E 64 2E 6D 73 2D 70 6F 77 65 72 70 on/vnd.ms-powerp
6F 69 6E 74 2C 20 2A 2F 2A 0D 0A 41 63 63 65 70 oint, %/%..Accep
74 2D 4C 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70 ozilla/age: en-u
73 0D 0A 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible;pt-EncodD
6E 67 3A 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windo, deflat
65 0D 0A 55 73 65 72 2D 41 67 65 6A 74 3A 20 4D e..User-Agent: M
6F 7A 69 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70 ozilla/4.0 (comp
61 74 69 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible; MSIE 5.0
31 3B 20 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windows 95)..
48 6F 73 74 3A 20 6C 61 62 2E 77 69 72 65 74 72 Host: lib.bvxttr
69 70 2E 6E 65 74 0D 0A 43 6F 6E 6E 65 63 74 69 ip.org..Connecti
6F 6E 3A 20 4B 65 65 70 2D 41 6C 69 76 65 0D 0A on: Keep-Alive..
43 6F 6F 6B 69 65 3A 20 41 53 50 53 45 53 53 49 Cookie: ASPSESSI
4F 4E 49 44 47 51 51 51 51 51 5A 55 3D 4B 4E 4F ONIDGQQQQZU=KNO
48 4D 4F 4A 41 4B 50 46 4F 50 48 4D 4C 41 50 4E HMOJAKPFOPHMLAPN
49 46 49 46 42 0D 0A 0D 0A 41 50 4E 49 46 49 46 IFIFB....APNIFIF
42 0D 0A 0D 0A B....
```

- A. Hexcode Attack
- B. Cross Site Scripting
- C. Multiple Domain Traversal Attack
- D. Unicode Directory Traversal Attack

Answer: D

NEW QUESTION 105

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. nmap -sn -pp < target ip address >
- B. nmap -sn -PO < target IP address >
- C. nmap -sn -PS < target IP address >
- D. nmap -sn -PA < target IP address >

Answer: C

Explanation:

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

NEW QUESTION 109

Which of the following programming languages is most susceptible to buffer overflow attacks, due to its lack of a built-in bounds checking mechanism?
Code:

[illegible]

- A. C#
B. Python
C. Java
D. C++

Answer: D

NEW QUESTION 112

Which DNS resource record can indicate how long any "DNS poisoning" could last?

- A. MX
- B. SOA
- C. NS
- D. TIMEOUT

Answer: B

NEW QUESTION 115

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: A

NEW QUESTION 119

Mary, a penetration tester, has found password hashes in a client system she managed to breach. She needs to use these passwords to continue with the test, but she does not have time to find the passwords that correspond to these hashes. Which type of attack can she implement in order to continue?

- A. LLMNR/NBT-NS poisoning
- B. Internal monologue attack
- C. Pass the ticket
- D. Pass the hash

Answer: D

NEW QUESTION 121

Under what conditions does a secondary name server request a zone transfer from a primary name server?

- A. When a primary SOA is higher than a secondary SOA
- B. When a secondary SOA is higher than a primary SOA
- C. When a primary name server has had its service restarted
- D. When a secondary name server has had its service restarted
- E. When the TTL falls to zero

Answer: A

NEW QUESTION 125

Chandler works as a pen-tester in an IT-firm in New York. As a part of detecting viruses in the systems, he uses a detection method where the anti-virus executes the malicious codes on a virtual machine to simulate CPU and memory activities. Which type of virus detection method did Chandler use in this context?

- A. Heuristic Analysis
- B. Code Emulation
- C. Scanning
- D. Integrity checking

Answer: B

NEW QUESTION 130

The security administrator of ABC needs to permit Internet traffic in the host 10.0.0.2 and UDP traffic in the host 10.1.1.3. He also needs to permit all FTP traffic to the rest of the network and deny all other traffic. After he applied his ACL configuration in the router, nobody can access the ftp, and the permitted hosts cannot access the Internet. According to the next configuration, what is happening in the network?

```
access-list 102 deny tcp any any
access-list 104 permit udp host 10.0.0.3 any
access-list 110 permit tcp host 10.0.0.2 eq www any access-list 108 permit tcp any eq ftp any
```

- A. The ACL 104 needs to be first because is UDP
B. The first ACL is denying all TCP traffic and the other ACLs are being ignored by the router
C. The ACL for FTP must be before the ACL 110
D. The ACL 110 needs to be changed to port 80

Answer: B

NEW QUESTION 133

Which protocol is used for setting up secure channels between two devices, typically in VPNs?

- A. PEM
- B. ppp
- C. IPSEC
- D. SET

Answer: C

NEW QUESTION 134

The tools which receive event logs from servers, network equipment, and applications, and perform analysis and correlation on those logs, and can generate alarms for security relevant issues, are known as what?

- A. network Sniffer
- B. Vulnerability Scanner
- C. Intrusion prevention Server
- D. Security incident and event Monitoring

Answer: D

NEW QUESTION 138

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network. You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

Answer: A

NEW QUESTION 142

By performing a penetration test, you gained access under a user account. During the test, you established a connection with your own machine via the SMB service and occasionally entered your login and password in plaintext.

Which file do you have to clean to clear the password?

- A. .X session-log
- B. .bashrc
- C. .profile
- D. .bash_history

Answer: D

Explanation:

File created by Bash, a Unix-based shell program commonly used on Mac OS X and Linux operating systems; stores a history of user commands entered at the command prompt; used for viewing old commands that are executed. BASH_HISTORY files are hidden files with no filename prefix. They always use the filename .bash_history. NOTE: Bash is that the shell program employed by Apple Terminal. Our goal is to assist you understand what a file with a *.bash_history suffix is and the way to open it. The Bash History file type, file format description, and Mac and Linux programs listed on this page are individually researched and verified by the FileInfo team. we attempt for 100% accuracy and only publish information about file formats that we've tested and validated.

NEW QUESTION 144

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages. Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key(Km1) and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128
- B. AES
- C. GOST block cipher
- D. DES

Answer: A

NEW QUESTION 146

Sam is working as a system administrator in an organization. He captured the principal characteristics of a vulnerability and produced a numerical score to reflect its severity using CVSS v3.0 to properly assess and prioritize the organization's vulnerability management processes. The base score that Sam obtained after performing cvss rating was 4.0. What is the CVSS severity level of the vulnerability discovered by Sam in the above scenario?

- A. Medium
- B. Low
- C. Critical

D. High

Answer: A

Explanation:

Rating CVSS Score None 0.0

Low 0.1 - 3.9

Medium 4.0 - 6.9

High 7.0 - 8.9

Critical 9.0 - 10.0

NEW QUESTION 147

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targetsThis example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP. Example b ARP ping scan of offline target



In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as `-PE` and `-PS`) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify `--send-ip` as shown in Example a “Raw IP Ping Scan for Offline Targets”.

If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an Apple-registered MAC address, your head may turn to you. Use the `--spoof-mac` option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 151

What is the algorithm used by LM for Windows2000 SAM?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 152

OpenSSL on Linux servers includes a command line tool for testing TLS. What is the name of the tool and the correct syntax to connect to a web server?

- A. openssl s_client -site www.website.com:443
- B. openssl_client -site www.website.com:443
- C. openssl s_client -connect www.website.com:443
- D. openssl_client -connect www.website.com:443

Answer: C

NEW QUESTION 156

Which of the following Linux commands will resolve a domain name into IP address?

- A. >host-t a hackeddomain.com
- B. >host-t ns hackeddomain.com

- C. >host -t soa hackeddomain.com
- D. >host -t AXFR hackeddomain.com

Answer: A

NEW QUESTION 160

A newly joined employee, Janet, has been allocated an existing system used by a previous employee. Before issuing the system to Janet, it was assessed by Martin, the administrator. Martin found that there were possibilities of compromise through user directories, registries, and other system parameters. He also identified vulnerabilities such as native configuration tables, incorrect registry or file permissions, and software configuration errors. What is the type of vulnerability assessment performed by Martin?

- A. Credentialed assessment
- B. Database assessment
- C. Host-based assessment
- D. Distributed assessment

Answer: C

Explanation:

The host-based vulnerability assessment (VA) resolution arose from the auditors' got to periodically review systems. Arising before the net becoming common, these tools typically take an "administrator's eye" read of the setting by evaluating all of the knowledge that an administrator has at his or her disposal. UsesHost VA tools verify system configuration, user directories, file systems, registry settings, and all forms of other info on a number to gain information about it. Then, it evaluates the chance of compromise. it should also live compliance to a predefined company policy so as to satisfy an annual audit. With administrator access, the scans area unit less possible to disrupt traditional operations since the computer code has the access it has to see into the complete configuration of the system.

What it Measures Host

VA tools will examine the native configuration tables and registries to spot not solely apparent vulnerabilities, however additionally "dormant" vulnerabilities – those weak or misconfigured systems and settings which will be exploited when an initial entry into the setting. Host VA solutions will assess the safety settings of a user account table; the access management lists related to sensitive files or data; and specific levels of trust applied to other systems. The host VA resolution will a lot of accurately verify the extent of the danger by determinant however way any specific exploit could also be ready to get.

NEW QUESTION 164

which of the following Bluetooth hacking techniques refers to the theft of information from a wireless device through Bluetooth?

- A. Bluesmacking
- B. Bluebugging
- C. Bluejacking
- D. Bluesnarfing

Answer: D

Explanation:

Bluesnarfing is the unauthorized access of information from a wireless device through Bluetooth connection, often between phones, desktops, laptops, and PDAs (personal digital assistant).

NEW QUESTION 169

A network admin contacts you. He is concerned that ARP spoofing or poisoning might occur on his network. What are some things he can do to prevent it? Select the best answers.

- A. Use port security on his switches.
- B. Use a tool like ARPwatch to monitor for strange ARP activity.
- C. Use a firewall between all LAN segments.
- D. If you have a small network, use static ARP entries.
- E. Use only static IP addresses on all PC's.

Answer: ABD

NEW QUESTION 170

Which of the following is not a Bluetooth attack?

- A. Bluedriving
- B. Bluesmacking
- C. Bluejacking
- D. Bluesnarfing

Answer: A

NEW QUESTION 172

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (High, Medium, Low)
- D. Medium, Low)
- E. Identifies sources of harm to an IT system
- F. (Natural, Human, Environmental)
- G. Environmental)

Answer: C

NEW QUESTION 175

You are performing a penetration test for a client and have gained shell access to a Windows machine on the internal network. You intend to retrieve all DNS records for the internal domain, if the DNS server is at 192.168.10.2 and the domain name is abccorp.local, what command would you type at the nslookup prompt to attempt a zone transfer?

- A. list server=192.168.10.2 type=all
- B. is-d abccorp.local
- C. lserver 192.168.10.2-t all
- D. List domain=Abccorp.local type=zone

Answer: B

NEW QUESTION 178

Security administrator John Smith has noticed abnormal amounts of traffic coming from local computers at night. Upon reviewing, he finds that user data have been exfiltrated by an attacker. AV tools are unable to find any malicious software, and the IDS/IPS has not reported on any non-whitelisted programs, what type of malware did the attacker use to bypass the company's application whitelisting?

- A. Phishing malware
- B. Zero-day malware
- C. File-less malware
- D. Logic bomb malware

Answer: C

Explanation:

<https://www.mcafee.com/enterprise/en-us/security-awareness/ransomware/what-is-fileless-malware.html>

NEW QUESTION 183

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 188

You are attempting to crack LM Manager hashed from Windows 2000 SAM file. You will be using LM Brute force hacking tool for decryption. What encryption algorithm will you be decrypting?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 193

What kind of detection techniques is being used in antivirus software that identifies malware by collecting data from multiple protected systems and instead of analyzing files locally it's made on the provider's environment?

- A. Behavioral based
- B. Heuristics based
- C. Honeypot based
- D. Cloud based

Answer: D

NEW QUESTION 197

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days. Sieve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
- B. Baiting
- C. Honey trap
- D. Piggybacking

Answer: C

Explanation:

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization.

Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

NEW QUESTION 198

During the enumeration phase, Lawrence performs banner grabbing to obtain information such as OS details and versions of services running. The service that he enumerated runs directly on TCP port 445.

Which of the following services is enumerated by Lawrence in this scenario?

- A. Server Message Block (SMB)
- B. Network File System (NFS)
- C. Remote procedure call (RPC)
- D. Telnet

Answer: A

Explanation:

Worker Message Block (SMB) is an organization document sharing and information texture convention. SMB is utilized by billions of gadgets in a different arrangement of working frameworks, including Windows, MacOS, iOS, Linux, and Android. Customers use SMB to get to information on workers. This permits sharing of records, unified information the board, and brought down capacity limit needs for cell phones. Workers additionally use SMB as a feature of the Software-characterized Data Center for outstanding burdens like grouping and replication.

Since SMB is a far off record framework, it requires security from assaults where a Windows PC may be fooled into reaching a pernicious worker running inside a confided in organization or to a far off worker outside the organization edge. Firewall best practices and arrangements can upgrade security keeping malevolent traffic from leaving the PC or its organization.

For Windows customers and workers that don't have SMB shares, you can obstruct all inbound SMB traffic utilizing the Windows Defender Firewall to keep far off associations from malignant or bargained gadgets. In the Windows Defender Firewall, this incorporates the accompanying inbound principles.

Name	Profile	Enabled
File and Printer Sharing (SMB-In)	All	No
Authentication Service (NP-In)	All	No
Remote Event Log Management (NP-In)	All	No
Remote Service Management (NP-In)	All	No

You should also create a new blocking rule to override any other inbound firewall rules. Use the following suggested settings for any Windows clients or servers that do not host SMB Shares:

- > Name: Block all inbound SMB 445
- > Description: Blocks all inbound SMB TCP 445 traffic. Not to be applied to domain controllers or computers that host SMB shares.
- > Action: Block the connection
- > Programs: All
- > Remote Computers: Any
- > Protocol Type: TCP
- > Local Port: 445
- > Remote Port: Any
- > Profiles: All
- > Scope (Local IP Address): Any
- > Scope (Remote IP Address): Any
- > Edge Traversal: Block edge traversal

You must not globally block inbound SMB traffic to domain controllers or file servers. However, you can restrict access to them from trusted IP ranges and devices to lower their attack surface. They should also be restricted to Domain or Private firewall profiles and not allow Guest/Public traffic.

NEW QUESTION 200

Within the context of Computer Security, which of the following statements describes Social Engineering best?

- A. Social Engineering is the act of publicly disclosing information
- B. Social Engineering is the means put in place by human resource to perform time accounting
- C. Social Engineering is the act of getting needed information from a person rather than breaking into a system
- D. Social Engineering is a training program within sociology studies

Answer: C

NEW QUESTION 202

Roma is a member of a security team. She was tasked with protecting the internal network of an organization from imminent threats. To accomplish this task, Roma fed threat intelligence into the security devices in a digital format to block and identify inbound and outbound malicious traffic entering the organization's network.

Which type of threat intelligence is used by Roma to secure the internal network?

- A. Technical threat intelligence
- B. Operational threat intelligence

- C. Tactical threat intelligence
- D. Strategic threat intelligence

Answer: A

NEW QUESTION 204

What port number is used by LDAP protocol?

- A. 110
- B. 389
- C. 464
- D. 445

Answer: B

NEW QUESTION 209

Which tool can be used to silently copy files from USB devices?

- A. USB Grabber
- B. USB Snoopy
- C. USB Sniffer
- D. Use Dumper

Answer: D

NEW QUESTION 210

Take a look at the following attack on a Web Server using obstructed URL:

```
http://www.certifiedhacker.com/script.ext?
template=%2e%2e%2f%2e%2e%2f%2e%2e%2f%65%74%63%2f%70%61%73%73%77%64
This request is made up of:
%2e%2e%2f%2e%2f%2e%2e%2f = ../ ../ ../
%65%74%63 = etc
%2f = /
%70%61%73%73%77%64 = passwd
```

How would you protect from these attacks?

- A. Configure the Web Server to deny requests involving "hex encoded" characters
- B. Create rules in IDS to alert on strange Unicode requests
- C. Use SSL authentication on Web Servers
- D. Enable Active Scripts Detection at the firewall and routers

Answer: B

NEW QUESTION 211

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

Answer: AE

NEW QUESTION 212

Which mode of IPSec should you use to assure security and confidentiality of data within the same LAN?

- A. ESP transport mode
- B. ESP confidential
- C. AH permissive
- D. AH Tunnel mode

Answer: A

NEW QUESTION 216

What ports should be blocked on the firewall to prevent NetBIOS traffic from not coming through the firewall if your network is comprised of Windows NT, 2000, and XP?

- A. 110
- B. 135
- C. 139
- D. 161
- E. 445
- F. 1024

Answer: BCE

NEW QUESTION 221

You are tasked to perform a penetration test. While you are performing information gathering, you find an employee list in Google. You find the receptionist's email, and you send her an email changing the source email to her boss's email (boss@company). In this email, you ask for a pdf with information. She reads your email and sends back a pdf with links. You exchange the pdf links with your malicious links (these links contain malware) and send back the modified pdf, saying that the links don't work. She reads your email, opens the links, and her machine gets infected. You now have access to the company network. What testing method did you use?

- A. Social engineering
- B. Piggybacking
- C. Tailgating
- D. Eavesdropping

Answer: A

NEW QUESTION 223

A zone file consists of which of the following Resource Records (RRs)?

- A. DNS, NS, AXFR, and MX records
- B. DNS, NS, PTR, and MX records
- C. SOA, NS, AXFR, and MX records
- D. SOA, NS, A, and MX records

Answer: D

NEW QUESTION 227

```
#!/usr/bin/python import socket buffer=["A"] counter=50 while len(buffer)<=100: buffer.append ("A"*counter)
counter=counter+50 commands= ["HELP","STATS .","RTIME .","LTIME .","SRUN .","TRUN
.","GMON
.","GDOG .","KSTET .","GTER .","HTER .","LTER .","KSTAN ."] for command in
commands: for
buffstring in buffer: print "Exploiting" +command +":"+str(len(buffstring))
s=socket.socket(socket.AF_INET,
socket.SOCK_STREAM) s.connect(('127.0.0.1', 9999)) s.recv(50) s.send(command+buffstring) s.close()
```

What is the code written for?

- A. Denial-of-service (DOS)
- B. Buffer Overflow
- C. Bruteforce
- D. Encryption

Answer: B

NEW QUESTION 231

You have gained physical access to a Windows 2008 R2 server which has an accessible disc drive. When you attempt to boot the server and log in, you are unable to guess the password. In your toolkit, you have an Ubuntu 9.10 Linux LiveCD. Which Linux-based tool can change any user's password or activate disabled Windows accounts?

- A. John the Ripper
- B. SET
- C. CHNTPW
- D. Cain & Abel

Answer: C

NEW QUESTION 234

Your company was hired by a small healthcare provider to perform a technical assessment on the network. What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings
- D. Create a disk image of a clean Windows installation

Answer: B

NEW QUESTION 238

Scenario: Joe turns on his home computer to access personal online banking. When he enters the URL www.bank.com. the website is displayed, but it prompts him to re-enter his credentials as if he has never visited the site before. When he examines the website URL closer, he finds that the site is not secure and the web address appears different. What type of attack he is experiencing?.

- A. Dos attack
- B. DHCP spoofing
- C. ARP cache poisoning
- D. DNS hijacking

Answer: D

NEW QUESTION 239

Kevin, a professional hacker, wants to penetrate CyberTech Inc.'s network. He employed a technique, using which he encoded packets with Unicode characters. The company's IDS cannot recognize the packet, but the target web server can decode them. What is the technique used by Kevin to evade the IDS system?

- A. Desynchronization
- B. Obfuscating
- C. Session splicing
- D. Urgency flag

Answer: B

Explanation:

Adversaries could decide to build an possible or file difficult to find or analyze by encrypting, encoding, or otherwise obfuscating its contents on the system or in transit. this is often common behavior which will be used across totally different platforms and therefore the network to evade defenses.

Payloads may be compressed, archived, or encrypted so as to avoid detection. These payloads may be used throughout Initial Access or later to mitigate detection. typically a user's action could also be needed to open and Deobfuscate/Decode Files or info for User Execution. The user can also be needed to input a parole to open a parole protected compressed/encrypted file that was provided by the mortal. Adversaries can also used compressed or archived scripts, like JavaScript.

Portions of files can even be encoded to cover the plain-text strings that will otherwise facilitate defenders with discovery. Payloads can also be split into separate, ostensibly benign files that solely reveal malicious practicality once reassembled.

Adversaries can also modify commands dead from payloads or directly via a Command and Scripting Interpreter. surroundings variables, aliases, characters, and different platform/language specific linguistics may be wont to evade signature based mostly detections and application management mechanisms.

NEW QUESTION 244

Henry is a penetration tester who works for XYZ organization. While performing enumeration on a client organization, he queries the DNS server for a specific cached DNS record. Further, by using this cached record, he determines the sites recently visited by the organization's user. What is the enumeration technique used by Henry on the organization?

- A. DNS zone walking
- B. DNS cache snooping
- C. DNS SEC zone walking
- D. DNS cache poisoning

Answer: B

NEW QUESTION 247

What is the BEST alternative if you discover that a rootkit has been installed on one of your computers?

- A. Copy the system files from a known good system
- B. Perform a trap and trace
- C. Delete the files and try to determine the source
- D. Reload from a previous backup
- E. Reload from known good media

Answer: E

NEW QUESTION 249

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden information about official government or federal databases. After gathering the Information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VoIP footpnting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 252

Ben purchased a new smartphone and received some updates on it through the OTA method. He received two messages: one with a PIN from the network operator and another asking him to enter the PIN received from the operator. As soon as he entered the PIN, the smartphone started functioning in an abnormal manner. What is the type of attack performed on Ben in the above scenario?

- A. Advanced SMS phishing
- B. Bypass SSL pinning
- C. Phishing
- D. Tap 'n ghost attack

Answer: A

NEW QUESTION 254

George is a security professional working for iTech Solutions. He was tasked with securely transferring sensitive data of the organization between industrial systems. In this process, he used a short-range communication protocol based on the IEEE 203.15.4 standard. This protocol is used in devices that transfer data

infrequently at a low rate in a restricted area, within a range of 10-100 m. What is the short-range wireless communication technology George employed in the above scenario?

- A. MQTT
- B. LPWAN
- C. Zigbee
- D. NB-IoT

Answer: C

Explanation:

Zigbee could be a wireless technology developed as associate open international normal to deal with the unique desires of affordable, low-power wireless IoT networks. The Zigbee normal operates on the IEEE 802.15.4 physical radio specification and operates in unauthorised bands as well as a pair of 4 GHz, 900 MHz and 868 MHz.

The 802.15.4 specification upon that the Zigbee stack operates gained confirmation by the Institute of Electrical and physical science Engineers (IEEE) in 2003. The specification could be a packet-based radio protocol supposed for affordable, battery-operated devices. The protocol permits devices to speak in an exceedingly kind of network topologies and may have battery life lasting many years.

The Zigbee three.0 Protocol

The Zigbee protocol has been created and ratified by member corporations of the Zigbee Alliance. Over three hundred leading semiconductor makers, technology corporations, OEMs and repair corporations comprise the Zigbee Alliance membership. The Zigbee protocol was designed to supply associate easy-to-use wireless information answer characterised by secure, reliable wireless network architectures.

THE ZIGBEE ADVANTAGE

The Zigbee 3.0 protocol is intended to speak information through rip-roaring RF environments that area unit common in business and industrial applications. Version 3.0 builds on the prevailing Zigbee normal however unifies the market-specific application profiles to permit all devices to be wirelessly connected within the same network, no matter their market designation and performance. what is more, a Zigbee 3.0 certification theme ensures the ability of product from completely different makers. Connecting Zigbee three.0 networks to the information science domain unveil observance and management from devices like smartphones and tablets on a local area network or WAN, as well as the web, and brings verity net of Things to fruition.

Zigbee protocol options include:

- Support for multiple network topologies like point-to-point, point-to-multipoint and mesh networks
- Low duty cycle – provides long battery life
- Low latency
- Direct Sequence unfold Spectrum (DSSS)
- Up to 65,000 nodes per network
- 128-bit AES encryption for secure information connections
- Collision avoidance, retries and acknowledgements

This is another short-range communication protocol based on the IEEE 802.15.4 standard. Zig-Bee is used in devices that transfer data infrequently at a low rate in a restricted area and within a range of 10–100 m.

NEW QUESTION 255

Todd has been asked by the security officer to purchase a counter-based authentication system. Which of the following best describes this type of system?

- A. A biometric system that bases authentication decisions on behavioral attributes.
- B. A biometric system that bases authentication decisions on physical attributes.
- C. An authentication system that creates one-time passwords that are encrypted with secret keys.
- D. An authentication system that uses passphrases that are converted into virtual passwords.

Answer: C

NEW QUESTION 256

A new wireless client is configured to join a 802.11 network. This client uses the same hardware and software as many of the other clients on the network. The client can see the network, but cannot connect. A wireless packet sniffer shows that the Wireless Access Point (WAP) is not responding to the association requests being sent by the wireless client. What is a possible source of this problem?

- A. The WAP does not recognize the client's MAC address
- B. The client cannot see the SSID of the wireless network
- C. Client is configured for the wrong channel
- D. The wireless client is not configured to use DHCP

Answer: A

NEW QUESTION 260

Which of the following tools can be used to perform a zone transfer?

- A. NSLookup
- B. Finger
- C. Dig
- D. Sam Spade
- E. Host
- F. Netcat
- G. Neotrace

Answer: ACDE

NEW QUESTION 265

Harris is attempting to identify the OS running on his target machine. He inspected the initial TTL in the IP header and the related TCP window size and obtained the following results:

TTL: 64 Window Size: 5840

What is the OS running on the target machine?

- A. Solaris OS
- B. Windows OS
- C. Mac OS
- D. Linux OS

Answer: D

NEW QUESTION 270

Given below are different steps involved in the vulnerability-management life cycle.

- 1) Remediation
- 2) Identify assets and create a baseline
- 3) Verification
- 4) Monitor
- 5) Vulnerability scan
- 6) Risk assessment

Identify the correct sequence of steps involved in vulnerability management.

- A. 2-->5-->6-->1-->3-->4
- B. 2-->1-->5-->6-->4-->3
- C. 2-->4-->5-->3-->6--> 1
- D. 1-->2-->3-->4-->5-->6

Answer: A

NEW QUESTION 273

Fred is the network administrator for his company. Fred is testing an internal switch.

From an external IP address, Fred wants to try and trick this switch into thinking it already has established a session with his computer. How can Fred accomplish this?

- A. Fred can accomplish this by sending an IP packet with the RST/SIN bit and the source address of his computer.
- B. He can send an IP packet with the SYN bit and the source address of his computer.
- C. Fred can send an IP packet with the ACK bit set to zero and the source address of the switch.
- D. Fred can send an IP packet to the switch with the ACK bit and the source address of his machine.

Answer: D

NEW QUESTION 278

What is the role of test automation in security testing?

- A. It is an option but it tends to be very expensive.
- B. It should be used exclusively
- C. Manual testing is outdated because of low speed and possible test setup inconsistencies.
- D. Test automation is not usable in security due to the complexity of the tests.
- E. It can accelerate benchmark tests and repeat them with a consistent test setu
- F. But it cannot replace manual testing completely.

Answer: D

NEW QUESTION 282

Joel, a professional hacker, targeted a company and identified the types of websites frequently visited by its employees. Using this information, he searched for possible loopholes in these websites and injected a malicious script that can redirect users from the web page and download malware onto a victim's machine. Joel waits for the victim to access the infected web application so as to compromise the victim's machine. Which of the following techniques is used by Joel in the above scenario?

- A. DNS rebinding attack
- B. Clickjacking attack
- C. MarioNet attack
- D. Watering hole attack

Answer: B

NEW QUESTION 283

Which of the following is a low-tech way of gaining unauthorized access to systems?

- A. Social Engineering
- B. Eavesdropping
- C. Scanning
- D. Sniffing

Answer: A

NEW QUESTION 286

Consider the following Nmap output:

```
Starting Nmap X.XX (http://nmap.org) at XXX-XX-XX XX:XX EDT
Nmap scan report for 192.168.1.42 Host is up (0.00023s latency).
Not shown: 932 filtered ports, 56 closed ports
PORT STATE SERVICE
21/tcp open ftp
22/tcp open ssh
25/tcp open smtp
53/tcp open domain
80/tcp open http
110/tcp open pop3
143/tcp open imap
443/tcp open https
465/tcp open smtps
587/tcp open submission
993/tcp open imaps
995/tcp open pop3s
Nmap done: 1 IP address (1 host up) scanned in 3.90 seconds
```

what command-line parameter could you use to determine the type and version number of the web server?

- A. -sv
- B. -Pn
- C. -V
- D. -ss

Answer: A

Explanation:

C:\Users\moi>nmap -h | findstr " -sV" -sV: Probe open ports to determine service/version info

NEW QUESTION 287

Susan, a software developer, wants her web API to update other applications with the latest information. For this purpose, she uses a user-defined HTTP tailback or push APIs that are raised based on trigger events: when invoked, this feature supplies data to other applications so that users can instantly receive real-time Information.

Which of the following techniques is employed by Susan?

- A. web shells
- B. Webhooks
- C. REST API
- D. SOAP API

Answer: B

Explanation:

Webhooks are one of a few ways internet applications will communicate with one another.


It allows you to send real-time data from one application to another whenever a given event happens.

For example, let's say you've created an application using the Foursquare API that tracks when people check into your restaurant. You ideally wish to be able to greet customers by name and provide a complimentary drink when they check in.

What a webhook will is notify you any time someone checks in, therefore you'd be able to run any processes that you simply had in your application once this event is triggered.

The data is then sent over the web from the application wherever the event originally occurred, to the receiving application that handles the data.

Here's a visual representation of what that looks like:

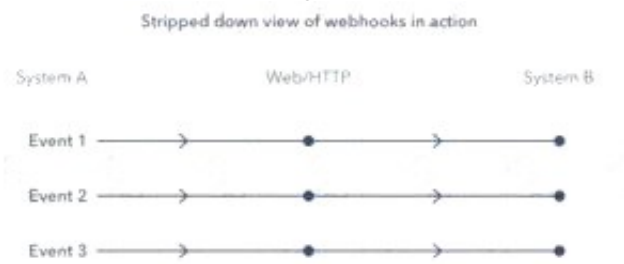

A webhook url is provided by the receiving application, and acts as a phone number that the other application will call once an event happens.

Only it's more complicated than a phone number, because data about the event is shipped to the webhook url in either JSON or XML format. this is known as the "payload."

Here's an example of what a webhook url looks like with the payload it's carrying:

```
https://yourapp.com/data/12345?customer=Bob&value=10.99&item=paper
To: yourapp.com/data/12345
Customer: Bob
Value: 10.99
Item: Paper
```

What are Webhooks? Webhooks are user-defined HTTP callback or push APIs that are raised based on events triggered, such as comment received on a post and pushing code to the registry. A webhook allows an application to update other applications with the latest information. Once invoked, it supplies data to the other applications, which means that users instantly receive real-time information. Webhooks are sometimes called "Reverse APIs" as they provide what is required for API specification, and the developer should create an API to use a webhook. A webhook is an API concept that is also used to send text messages and notifications to mobile numbers or email addresses from an application when a specific event is triggered. For instance, if you search for something in the online store and the required item is out of stock, you click on the "Notify me" bar to get an alert from the application when that item is available for purchase. These notifications from the applications are usually sent through webhooks.

NEW QUESTION 292

Tony is a penetration tester tasked with performing a penetration test. After gaining initial access to a target system, he finds a list of hashed passwords.

Which of the following tools would not be useful for cracking the hashed passwords?

- A. John the Ripper
- B. Hashcat
- C. netcat
- D. THC-Hydra

Answer: A

NEW QUESTION 294

An organization decided to harden its security against web-application and web-server attacks. John, a security personnel in the organization, employed a security scanner to automate web-application security testing and to guard the organization's web infrastructure against web-application threats. Using that tool, he also wants to detect XSS, directory transversal problems, fault injection, SQL injection, attempts to execute commands, and several other attacks. Which of the following security scanners will help John perform the above task?

- A. AlienVault®OSSIM™
- B. Syhunt Hybrid
- C. Saleae Logic Analyzer
- D. Cisco ASA

Answer: B

NEW QUESTION 297

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10..1.5.200
- D. 10.1.4.156

Answer: C

NEW QUESTION 302

Which of the following describes the characteristics of a Boot Sector Virus?

- A. Modifies directory table entries so that directory entries point to the virus code instead of the actual program.
- B. Moves the MBR to another location on the RAM and copies itself to the original location of the MBR.
- C. Moves the MBR to another location on the hard disk and copies itself to the original location of the MBR.
- D. Overwrites the original MBR and only executes the new virus code.

Answer: C

NEW QUESTION 307

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 311

Shellshock allowed an unauthorized user to gain access to a server. It affected many Internet-facing services, which OS did it not directly affect?

- A. Linux
- B. Unix
- C. OS X
- D. Windows

Answer: D

NEW QUESTION 316

You are working as a Security Analyst in a company XYZ that owns the whole subnet range of 23.0.0.0/8 and 192.168.0.0/8.

While monitoring the data, you find a high number of outbound connections. You see that IP's owned by XYZ (Internal) and private IP's are communicating to a Single Public IP. Therefore, the Internal IP's are sending data to the Public IP.

After further analysis, you find out that this Public IP is a blacklisted IP, and the internal communicating devices are compromised.

What kind of attack does the above scenario depict?

- A. Botnet Attack
- B. Spear Phishing Attack
- C. Advanced Persistent Threats
- D. Rootkit Attack

Answer: A

NEW QUESTION 317

Which of these is capable of searching for and locating rogue access points?

- A. HIDS
- B. WISS
- C. WIPS
- D. NIDS

Answer: C

NEW QUESTION 320

What is the most common method to exploit the “Bash Bug” or “Shellshock” vulnerability?

- A. SYN Flood
- B. SSH
- C. Through Web servers utilizing CGI (Common Gateway Interface) to send a malformed environment variable to a vulnerable Web server
- D. Manipulate format strings in text fields

Answer: C

NEW QUESTION 322

There have been concerns in your network that the wireless network component is not sufficiently secure. You perform a vulnerability scan of the wireless network and find that it is using an old encryption protocol that was designed to mimic wired encryption, what encryption protocol is being used?

- A. WEP
- B. RADIUS
- C. WPA
- D. WPA3

Answer: A

Explanation:

Wired Equivalent Privacy (WEP) may be a security protocol, laid out in the IEEE wireless local area network (Wi-Fi) standard, 802.11b, that's designed to supply a wireless local area network (WLAN) with A level of security and privacy like what's usually expected of a wired LAN. A wired local area network (LAN) is usually protected by physical security mechanisms (controlled access to a building, for example) that are effective for a controlled physical environment, but could also be ineffective for WLANs because radio waves aren't necessarily bound by the walls containing the network. WEP seeks to determine similar protection thereto offered by the wired network's physical security measures by encrypting data transmitted over the WLAN. encoding protects the vulnerable wireless link between clients and access points; once this measure has been taken, other typical LAN security mechanisms like password protection, end-to-end encryption, virtual private networks (VPNs), and authentication are often put in situ to make sure privacy. A research group from the University of California at Berkeley recently published a report citing “major security flaws” in WEP that left WLANs using the protocol susceptible to attacks (called wireless equivalent privacy attacks). within the course of the group's examination of the technology, they were ready to intercept and modify transmissions and gain access to restricted networks. The Wireless Ethernet Compatibility Alliance (WECA) claims that WEP – which is included in many networking products – was never intended to be the only security mechanism for a WLAN, and that, in conjunction with traditional security practices, it's very effective.

NEW QUESTION 323

Sam, a web developer, was instructed to incorporate a hybrid encryption software program into a web application to secure email messages. Sam used an encryption software, which is a free implementation of the OpenPGP standard that uses both symmetric-key cryptography and asymmetric-key cryptography for improved speed and secure key exchange. What is the encryption software employed by Sam for securing the email messages?

- A. PGP
- B. S/MIME
- C. SMTP
- D. GPG

Answer: A

NEW QUESTION 325

Which among the following is the best example of the third step (delivery) in the cyber kill chain?

- A. An intruder sends a malicious attachment via email to a target.
- B. An intruder creates malware to be used as a malicious attachment to an email.
- C. An intruder's malware is triggered when a target opens a malicious email attachment.
- D. An intruder's malware is installed on a target's machine.

Answer: A

NEW QUESTION 329

A penetration tester is performing the footprinting process and is reviewing publicly available information about an organization by using the Google search engine. Which of the following advanced operators would allow the pen tester to restrict the search to the organization's web domain?

- A. [allinurl:]
- B. [location:]
- C. [site:]
- D. [link:]

Answer: C

NEW QUESTION 333

Robert, a professional hacker, is attempting to execute a fault injection attack on a target IoT device. In this process, he injects faults into the power supply that can be used for remote execution, also causing the skipping of key instructions. He also injects faults into the clock network used for delivering a synchronized signal across the chip.

Which of the following types of fault injection attack is performed by Robert in the above scenario?

- A. Frequency/voltage tampering
- B. Optical, electromagnetic fault injection (EMFI)
- C. Temperature attack
- D. Power/clock/reset glitching

Answer: D

Explanation:

These types of attacks occur when faults or glitches are INJECTED into the Power supply that can be used for remote execution.

NEW QUESTION 335

Eric, a cloud security engineer, implements a technique for securing the cloud resources used by his organization. This technique assumes by default that a user attempting to access the network is not an authentic entity and verifies every incoming connection before allowing access to the network. Using this technique, he also imposed conditions such that employees can access only the resources required for their role.

What is the technique employed by Eric to secure cloud resources?

- A. Serverless computing
- B. Demilitarized zone
- C. Container technology
- D. Zero trust network

Answer: D

NEW QUESTION 339

An Internet Service Provider (ISP) has a need to authenticate users connecting via analog modems, Digital Subscriber Lines (DSL), wireless data services, and Virtual Private Networks (VPN) over a Frame Relay network.

Which AAA protocol is the most likely able to handle this requirement?

- A. TACACS+
- B. DIAMETER
- C. Kerberos
- D. RADIUS

Answer: D

NEW QUESTION 341

Why would you consider sending an email to an address that you know does not exist within the company you are performing a Penetration Test for?

- A. To determine who is the holder of the root account
- B. To perform a DoS
- C. To create needless SPAM
- D. To illicit a response back that will reveal information about email servers and how they treat undeliverable mail
- E. To test for virus protection

Answer: D

NEW QUESTION 345

Calvin, a software developer, uses a feature that helps him auto-generate the content of a web page without manual involvement and is integrated with SSI directives. This leads to a vulnerability in the developed web application as this feature accepts remote user inputs and uses them on the page. Hackers can exploit this feature and pass malicious SSI directives as input values to perform malicious activities such as modifying and erasing server files. What is the type of injection attack Calvin's web application is susceptible to?

- A. Server-side template injection
- B. Server-side JS injection
- C. CRLF injection
- D. Server-side includes injection

Answer: D

NEW QUESTION 348

what is the port to block first in case you are suspicious that an IoT device has been compromised?

- A. 22
- B. 443
- C. 48101
- D. 80

Answer: C

Explanation:

TCP port 48101 uses the Transmission management Protocol. transmission control protocol is one in all the most protocols in TCP/IP networks. transmission

control protocol could be a connection-oriented protocol, it needs acknowledgement to line up end-to-end communications. only a association is about up user's knowledge may be sent bi-directionally over the association.

Attention! transmission control protocol guarantees delivery of knowledge packets on port 48101 within the same order during which they were sent. bonded communication over transmission control protocol port 48101 is that the main distinction between transmission control protocol and UDP. UDP port 48101 wouldn't have bonded communication as transmission control protocol.

UDP on port 48101 provides Associate in Nursing unreliable service and datagrams might arrive duplicated, out of order, or missing unexpectedly. UDP on port 48101 thinks that error checking and correction isn't necessary or performed within the application, avoiding the overhead of such process at the network interface level.

UDP (User Datagram Protocol) could be a borderline message-oriented Transport Layer protocol (protocol is documented in IETF RFC 768).

Application examples that always use UDP: vocalisation IP (VoIP), streaming media and period multiplayer games. several internet applications use UDP, e.g. the name System (DNS), the Routing info Protocol (RIP), the Dynamic Host Configuration Protocol (DHCP), the straightforward Network Management Protocol (SNMP).

NEW QUESTION 349

While using your bank's online servicing you notice the following string in the URL bar:

"http: // www. MyPersonalBank. com/ account?id=368940911028389&Damount=10980&Camount=21"

You observe that if you modify the Damount & Camount values and submit the request, that data on the web page reflects the changes.

Which type of vulnerability is present on this site?

- A. Cookie Tampering
- B. SQL Injection
- C. Web Parameter Tampering
- D. XSS Reflection

Answer: C

NEW QUESTION 354

Which Nmap switch helps evade IDS or firewalls?

- A. -n/-R
- B. -0N/-0X/-0G
- C. -T
- D. -D

Answer: C

NEW QUESTION 357

What type of analysis is performed when an attacker has partial knowledge of inner-workings of the application?

- A. Black-box
- B. Announced
- C. White-box
- D. Grey-box

Answer: D

NEW QUESTION 358

What type of virus is most likely to remain undetected by antivirus software?

- A. Cavity virus
- B. Stealth virus
- C. File-extension virus
- D. Macro virus

Answer: B

NEW QUESTION 359

An LDAP directory can be used to store information similar to a SQL database. LDAP uses a database structure instead of SQL's _____ structure. Because of this, LDAP has difficulty representing many-to-one relationships.

- A. Relational, Hierarchical
- B. Strict, Abstract
- C. Hierarchical, Relational
- D. Simple, Complex

Answer: C

NEW QUESTION 362

What is GINA?

- A. Gateway Interface Network Application
- B. GUI Installed Network Application CLASS
- C. Global Internet National Authority (G-USA)
- D. Graphical Identification and Authentication DLL

Answer: D

NEW QUESTION 365

What does the following command in netcat do? nc -l -u -p55555 < /etc/passwd

- A. logs the incoming connections to /etc/passwd file
- B. loads the /etc/passwd file to the UDP port 55555
- C. grabs the /etc/passwd file when connected to UDP port 55555
- D. deletes the /etc/passwd file when connected to the UDP port 55555

Answer: C

NEW QUESTION 367

A post-breach forensic investigation revealed that a known vulnerability in Apache Struts was to blame for the Equifax data breach that affected 143 million customers. A fix was available from the software vendor for several months prior to the intrusion. This is likely a failure in which of the following security processes?

- A. vendor risk management
- B. Security awareness training
- C. Secure deployment lifecycle
- D. Patch management

Answer: D

Explanation:

Patch management is that the method that helps acquire, test and install multiple patches (code changes) on existing applications and software tools on a pc, enabling systems to remain updated on existing patches and determining that patches are the suitable ones. Managing patches so becomes simple and simple. Patch Management is usually done by software system firms as a part of their internal efforts to mend problems with the various versions of software system programs and also to assist analyze existing software system programs and discover any potential lack of security features or different upgrades. Software patches help fix those problems that exist and are detected solely once the software's initial unharness. Patches mostly concern security while there are some patches that concern the particular practicality of programs as well.

NEW QUESTION 369

A company's policy requires employees to perform file transfers using protocols which encrypt traffic. You suspect some employees are still performing file transfers using unencrypted protocols because the employees do not like changes. You have positioned a network sniffer to capture traffic from the laptops used by employees in the data ingest department. Using Wireshark to examine the captured traffic, which command can be used as display filter to find unencrypted file transfers?

- A. tcp.port == 21
- B. tcp.port == 23
- C. tcp.port == 21 || tcp.port == 22
- D. tcp.port != 21

Answer: A

NEW QUESTION 370

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorot
- C. Zscaler
- D. Trident

Answer: B

NEW QUESTION 373

Dayn, an attacker, wanted to detect if any honeypots are installed in a target network. For this purpose, he used a time-based TCP fingerprinting method to validate the response to a normal computer and the response of a honeypot to a manual SYN request. Which of the following techniques is employed by Dayn to detect honeypots?

- A. Detecting honeypots running on VMware
- B. Detecting the presence of Honeyd honeypots
- C. Detecting the presence of Snort-inline honeypots
- D. Detecting the presence of Sebek-based honeypots

Answer: C

NEW QUESTION 374

Clark is a professional hacker. He created and configured multiple domains pointing to the same host to switch quickly between the domains and avoid detection. Identify the behavior of the adversary in the above scenario.

- A. use of command-line interface
- B. Data staging
- C. Unspecified proxy activities
- D. Use of DNS tunneling

Answer: C

Explanation:

A proxy server acts as a gateway between you and therefore the internet. It's an intermediary server separating end users from the websites they browse. Proxy servers provide varying levels of functionality, security, and privacy counting on your use case, needs, or company policy. If you're employing a proxy server, internet traffic flows through the proxy server on its thanks to the address you requested. A proxy server is essentially a computer on the web with its own IP address that your computer knows. once you send an internet request, your request goes to the proxy server first. The proxy server then makes your web request on your behalf, collects the response from the online server, and forwards you the online page data so you'll see the page in your browser.

NEW QUESTION 378

Firewalls are the software or hardware systems that are able to control and monitor the traffic coming in and out the target network based on pre-defined set of rules. Which of the following types of firewalls can protect against SQL injection attacks?

- A. Data-driven firewall
- B. Packet firewall
- C. Web application firewall
- D. Stateful firewall

Answer: C

NEW QUESTION 379

Larry, a security professional in an organization, has noticed some abnormalities in the user accounts on a web server. To thwart evolving attacks, he decided to harden the security of the web server by adopting a countermeasures to secure the accounts on the web server. Which of the following countermeasures must Larry implement to secure the user accounts on the web server?

- A. Enable unused default user accounts created during the installation of an OS
- B. Enable all non-interactive accounts that should exist but do not require interactive login
- C. Limit the administrator or root-level access to the minimum number of users
- D. Retain all unused modules and application extensions

Answer: C

NEW QUESTION 381

Which type of security feature stops vehicles from crashing through the doors of a building?

- A. Bollards
- B. Receptionist
- C. Mantrap
- D. Turnstile

Answer: A

NEW QUESTION 384

An attacker, using a rogue wireless AP, performed an MITM attack and injected an HTML code to embed a malicious applet in all HTTP connections. When users accessed any page, the applet ran and exploited many machines. Which one of the following tools the hacker probably used to inject HTML code?

- A. Wireshark
- B. Ettercap
- C. Aircrack-ng
- D. Tcpdump

Answer: B

NEW QUESTION 388

What is the following command used for?

```
sqlmap.py-u  
„http://10.10.1.20/?p=1  
&forumaction=search" -dbs
```

- A. Creating backdoors using SQL injection
- B. A Enumerating the databases in the DBMS for the URL
- C. Retrieving SQL statements being executed on the database
- D. Searching database statements at the IP address given

Answer: A

NEW QUESTION 389

Don, a student, came across a gaming app in a third-party app store and installed it. Subsequently, all the legitimate apps in his smartphone were replaced by deceptive applications that appeared legitimate. He also received many advertisements on his smartphone after installing the app. What is the attack performed on Don in the above scenario?

- A. SMS phishing attack
- B. SIM card attack
- C. Agent Smith attack
- D. Clickjacking

Answer: C

Explanation:

Agent Smith Attack

Agent Smith attacks are carried out by luring victims into downloading and installing malicious apps designed and published by attackers in the form of games, photo editors, or other attractive tools from third-party app stores such as 9Apps. Once the user has installed the app, the core malicious code inside the application infects or replaces the legitimate apps in the victim's mobile device C&C commands. The deceptive application replaces legitimate apps such as WhatsApp, SHAREit, and MX Player with similar infected versions. The application sometimes also appears to be an authentic Google product such as Google Updater or Themes. The attacker then produces a massive volume of irrelevant and fraudulent advertisements on the victim's device through the infected app for financial gain. Attackers exploit these apps to steal critical information such as personal information, credentials, and bank details, from the victim's mobile device through C&C commands.

NEW QUESTION 390

What is correct about digital signatures?

- A. A digital signature cannot be moved from one signed document to another because it is the hash of the original document encrypted with the private key of the signing party.
- B. Digital signatures may be used in different documents of the same type.
- C. A digital signature cannot be moved from one signed document to another because it is a plain hash of the document content.
- D. Digital signatures are issued once for each user and can be used everywhere until they expire.

Answer: A

NEW QUESTION 395

Eric has discovered a fantastic package of tools named Dsniff on the Internet. He has learnt to use these tools in his lab and is now ready for real world exploitation. He was able to effectively intercept communications between the two entities and establish credentials with both sides of the connections. The two remote ends of the communication never notice that Eric is relaying the information between the two. What would you call this attack?

- A. Interceptor
- B. Man-in-the-middle
- C. ARP Proxy
- D. Poisoning Attack

Answer: B

NEW QUESTION 400

An attacker identified that a user and an access point are both compatible with WPA2 and WPA3 encryption. The attacker installed a rogue access point with only WPA2 compatibility in the vicinity and forced the victim to go through the WPA2 four-way handshake to get connected. After the connection was established, the attacker used automated tools to crack WPA2-encrypted messages. What is the attack performed in the above scenario?

- A. Timing-based attack
- B. Side-channel attack
- C. Downgrade security attack
- D. Cache-based attack

Answer: B

NEW QUESTION 401

Insecure direct object reference is a type of vulnerability where the application does not verify if the user is authorized to access the internal object via its name or key. Suppose a malicious user Rob tries to get access to the account of a benign user Ned.

Which of the following requests best illustrates an attempt to exploit an insecure direct object reference vulnerability?

- A. "GET /restricted/goldtransfer?to=Rob&from=1 or 1=1' HTTP/1.1Host: westbank.com"
- B. "GET /restricted/\r\n\"%00account%00Ned%00access HTTP/1.1 Host: westbank.com"
- C. "GET /restricted/accounts/?name=Ned HTTP/1.1 Host westbank.com"
- D. "GET /restricted/ HTTP/1.1 Host: westbank.com"

Answer: C

NEW QUESTION 406

One of your team members has asked you to analyze the following SOA record.

What is the TTL? Rutgers.edu.SOA NS1.Rutgers.edu ipad.college.edu (200302028 3600 3600 604800 2400.)

- A. 200303028
- B. 3600
- C. 604800
- D. 2400
- E. 60
- F. 4800

Answer: D

NEW QUESTION 411

Thomas, a cloud security professional, is performing security assessment on cloud services to identify any loopholes. He detects a vulnerability in a bare-metal cloud server that can enable hackers to implant malicious backdoors in its firmware. He also identified that an installed backdoor can persist even if the server is reallocated to new clients or businesses that use it as an IaaS.

What is the type of cloud attack that can be performed by exploiting the vulnerability discussed in the above scenario?

- A. Man-in-the-cloud (MITC) attack
- B. Cloud cryptojacking

- C. Cloudborne attack
- D. Metadata spoofing attack

Answer: C

NEW QUESTION 415

You are programming a buffer overflow exploit and you want to create a NOP sled of 200 bytes in the program exploit.c

```
char shellcode[] =  
"\x31\xc0\xb0\x46\x31\xdb\x31\xc9\xcd\x80\xeb\x16\x5b\x31\xc0"  
"\x88\x43\x07\x89\x5b\x08\x89\x43\x0c\xb0\x0b\x8d\x4b\x08\x8d"  
"\x53\x0c\xcd\x80\xe8\xe5\xff\xff\xff\x2f\x62\x69\x6e\x2f\x73"  
"\x68";
```

What is the hexadecimal value of NOP instruction?

- A. 0x60
- B. 0x80
- C. 0x70
- D. 0x90

Answer: D

NEW QUESTION 418

Samuel, a professional hacker, monitored and Intercepted already established traffic between Bob and a host machine to predict Bob's ISN. Using this ISN, Samuel sent spoofed packets with Bob's IP address to the host machine. The host machine responded with <| packet having an Incremented ISN. Consequently, Bob's connection got hung, and Samuel was able to communicate with the host machine on behalf of Bob. What is the type of attack performed by Samuel in the above scenario?

- A. UDP hijacking
- B. Blind hijacking
- C. TCP/IP hacking
- D. Forbidden attack

Answer: C

Explanation:

A TCP/IP hijack is an attack that spoofs a server into thinking it's talking with a sound client, once actually it's communication with an assaulter that has condemned (or hijacked) the tcp session. Assume that the client has administrator-level privileges, which the attacker needs to steal that authority so as to form a brand new account with root-level access of the server to be used afterward. A tcp Hijacking is sort of a two-phased man-in-the-middle attack. The man-in-the-middle assaulter lurks within the circuit between a shopper and a server so as to work out what port and sequence numbers are being employed for the conversation.

First, the attacker knocks out the client with an attack, like Ping of Death, or ties it up with some reasonably ICMP storm. This renders the client unable to transmit any packets to the server. Then, with the client crashed, the attacker assumes the client's identity so as to talk with the server. By this suggests, the attacker gains administrator-level access to the server.

One of the most effective means of preventing a hijack attack is to want a secret, that's a shared secret between the shopper and also the server. looking on the strength of security desired, the key may be used for random exchanges. this is often once a client and server periodically challenge each other, or it will occur with each exchange, like Kerberos.

NEW QUESTION 423

Stella, a professional hacker, performs an attack on web services by exploiting a vulnerability that provides additional routing information in the SOAP header to support asynchronous communication. This further allows the transmission of web-service requests and response messages using different TCP connections. Which of the following attack techniques is used by Stella to compromise the web services?

- A. XML injection
- B. WS-Address spoofing
- C. SOAPAction spoofing
- D. Web services parsing attacks

Answer: B

Explanation:

WS-Address provides additional routing information in the SOAP header to support asynchronous communication. This technique allows the transmission of web service requests and response messages using different TCP connections

<https://www.google.com/search?client=firefox-b-d&q=WS-Address+spoofing> CEH V11 Module 14 Page 1896

NEW QUESTION 424

Which of the following web vulnerabilities would an attacker be attempting to exploit if they delivered the following input?

```
<!DOCTYPE blah [ < IENTITY trustme SYSTEM "file:///etc/passwd" > ] >
```

- A. XXE
- B. SQLi
- C. IDOR
- D. XSS

Answer: A

NEW QUESTION 426

A large mobile telephony and data network operator has a data center that houses network elements. These are essentially large computers running on Linux. The perimeter of the data center is secured with firewalls and IPS systems. What is the best security policy concerning this setup?

- A. Network elements must be hardened with user ids and strong password
- B. Regular security tests and audits should be performed.
- C. As long as the physical access to the network elements is restricted, there is no need for additional measures.
- D. There is no need for specific security measures on the network elements as long as firewalls and IPS systems exist.
- E. The operator knows that attacks and down time are inevitable and should have a backup site.

Answer: A

NEW QUESTION 428

What term describes the amount of risk that remains after the vulnerabilities are classified and the countermeasures have been deployed?

- A. Residual risk
- B. Impact risk
- C. Deferred risk
- D. Inherent risk

Answer: A

NEW QUESTION 429

PGP, SSL, and IKE are all examples of which type of cryptography?

- A. Digest
- B. Secret Key
- C. Public Key
- D. Hash Algorithm

Answer: C

NEW QUESTION 432

An organization is performing a vulnerability assessment for mitigating threats. James, a pen tester, scanned the organization by building an inventory of the protocols found on the organization's machines to detect which ports are attached to services such as an email server, a web server or a database server. After identifying the services, he selected the vulnerabilities on each machine and started executing only the relevant tests. What is the type of vulnerability assessment solution that James employed in the above scenario?

- A. Product-based solutions
- B. Tree-based assessment
- C. Service-based solutions
- D. inference-based assessment

Answer: D

Explanation:

In an inference-based assessment, scanning starts by building an inventory of the protocols found on the machine. After finding a protocol, the scanning process starts to detect which ports are attached to services, such as an email server, web server, or database server. After finding services, it selects vulnerabilities on each machine and starts to execute only those relevant tests.

NEW QUESTION 434

Attacker Steve targeted an organization's network with the aim of redirecting the company's web traffic to another malicious website. To achieve this goal, Steve performed DNS cache poisoning by exploiting the vulnerabilities in the DNS server software and modified the original IP address of the target website to that of a fake website. What is the technique employed by Steve to gather information for identity theft?

- A. Pretexting
- B. Pharming
- C. Wardriving
- D. Skimming

Answer: B

Explanation:

A pharming attacker tries to send a web site's traffic to a faux website controlled by the offender, typically for the aim of collection sensitive data from victims or putting in malware on their machines. Attacker tend to specialize in making look-alike ecommerce and digital banking websites to reap credentials and payment card data.

Though they share similar goals, pharming uses a special technique from phishing. "Pharming attacker are targeted on manipulating a system, instead of tricking people into reaching to a dangerous web site," explains David Emm, principal security man of science at Kaspersky. "When either a phishing or pharming attacker is completed by a criminal, they need a similar driving issue to induce victims onto a corrupt location, however the mechanisms during which this is often undertaken are completely different."

NEW QUESTION 435

Robin, an attacker, is attempting to bypass the firewalls of an organization through the DNS tunneling method in order to exfiltrate data. He is using the NSTX tool for bypassing the firewalls. On which of the following ports should Robin run the NSTX tool?


- A. Port 53
- B. Port 23
- C. Port 50

D. Port 80

Answer: A

Explanation:

DNS uses Ports 53 which is almost always open on systems, firewalls, and clients to transmit DNS queries. Instead of the more familiar Transmission Control Protocol (TCP) these queries use User Datagram Protocol (UDP) due to its low-latency, bandwidth and resource usage compared TCP-equivalent queries. UDP has no error or flow-control capabilities, nor does it have any integrity checking to make sure the info arrived intact. How is internet use (browsing, apps, chat etc) so reliable then? If the UDP DNS query fails (it's a best-effort protocol after all) within the first instance, most systems will retry variety of times and only after multiple failures, potentially switch to TCP before trying again; TCP is additionally used if the DNS query exceeds the restrictions of the UDP datagram size – typically 512 bytes for DNS but can depend upon system settings. Figure 1 below illustrates the essential process of how DNS operates: the client sends a question string (for example, mail.google[.]com during this case) with a particular type – typically A for a number address. I've skipped the part whereby intermediate DNS systems may need to establish where '.com' exists, before checking out where 'google[.]com' are often found, and so on.

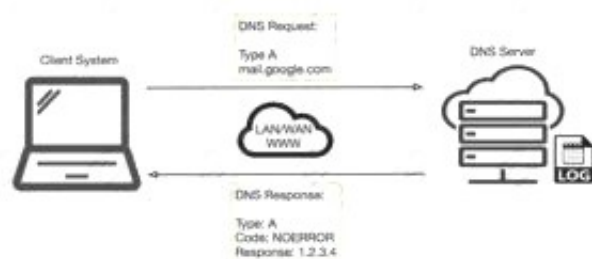

Many worms and scanners are created to seek out and exploit systems running telnet. Given these facts, it's really no surprise that telnet is usually seen on the highest Ten Target Ports list. Several of the vulnerabilities of telnet are fixed. They require only an upgrade to the foremost current version of the telnet Daemon or OS upgrade. As is usually the case, this upgrade has not been performed on variety of devices. This might flow from to the very fact that a lot of systems administrators and users don't fully understand the risks involved using telnet. Unfortunately, the sole solution for a few of telnet's vulnerabilities is to completely discontinue its use. The well-liked method of mitigating all of telnet's vulnerabilities is replacing it with alternate protocols like ssh. Ssh is capable of providing many of an equivalent functions as telnet and a number of other additional services typical handled by other protocols like FTP and Xwindows. Ssh does still have several drawbacks to beat before it can completely replace telnet. It's typically only supported on newer equipment. It requires processor and memory resources to perform the info encryption and decryption. It also requires greater bandwidth than telnet thanks to the encryption of the info. This paper was written to assist clarify how dangerous the utilization of telnet are often and to supply solutions to alleviate the main known threats so as to enhance the general security of the web. Once a reputation is resolved to an IP caching also helps: the resolved name-to-IP is usually cached on the local system (and possibly on intermediate DNS servers) for a period of your time. Subsequent queries for an equivalent name from an equivalent client then don't leave the local system until said cache expires. Of course, once the IP address of the remote service is understood, applications can use that information to enable other TCP-based protocols, like HTTP, to try to to their actual work, for instance ensuring internet cat GIFs are often reliably shared together with your colleagues. So, beat all, a couple of dozen extra UDP DNS queries from an organization's network would be fairly inconspicuous and will leave a malicious payload to beacon bent an adversary; commands could even be received to the requesting application for processing with little difficulty.

NEW QUESTION 436

Which of the following options represents a conceptual characteristic of an anomaly-based IDS over a signature-based IDS?

- A. Produces less false positives
- B. Can identify unknown attacks
- C. Requires vendor updates for a new threat
- D. Cannot deal with encrypted network traffic

Answer: B

NEW QUESTION 437

A large company intends to use Blackberry for corporate mobile phones and a security analyst is assigned to evaluate the possible threats. The analyst will use the Blackjacking attack method to demonstrate how an attacker could circumvent perimeter defenses and gain access to the Prometric Online Testing – Reports https://ibt1.prometric.com/users/custom/report_queue/rq_str... corporate network. What tool should the analyst use to perform a Blackjacking attack?

- A. Paros Proxy
- B. BBProxy
- C. Blooover
- D. BBCrack

Answer: B

NEW QUESTION 440

Stephen, an attacker, targeted the industrial control systems of an organization. He generated a fraudulent email with a malicious attachment and sent it to employees of the target organization. An employee who manages the sales software of the operational plant opened the fraudulent email and clicked on the malicious attachment. This resulted in the malicious attachment being downloaded and malware being injected into the sales software maintained in the victim's system. Further, the malware propagated itself to other networked systems, finally damaging the industrial automation components. What is the attack technique used by Stephen to damage the industrial systems?

- A. Spear-phishing attack
- B. SMishing attack
- C. Reconnaissance attack
- D. HMI-based attack

Answer: A

NEW QUESTION 444

Which of the following is a component of a risk assessment?

- A. Administrative safeguards
- B. Physical security

- C. DMZ
- D. Logical interface

Answer: A

NEW QUESTION 445

Emily, an extrovert obsessed with social media, posts a large amount of private information, photographs, and location tags of recently visited places. Realizing this. James, a professional hacker, targets Emily and her acquaintances, conducts a location search to detect their geolocation by using an automated tool, and gathers information to perform other sophisticated attacks. What is the tool employed by James in the above scenario?

- A. ophcrack
- B. Hootsuite
- C. VisualRoute
- D. HULK

Answer: B

Explanation:

Hootsuite may be a social media management platform that covers virtually each side of a social media manager's role.

With only one platform users area unit ready to do the easy stuff like reverend cool content and schedule posts on social media in all the high to managing team members and measure ROI.

There area unit many totally different plans to decide on from, from one user set up up to a bespoke enterprise account that's appropriate for much larger organizations.

Conducting location search on social media sites such as Twitter, Instagram, and Facebook helps attackers to detect the geolocation of the target. This information further helps attackers to perform various social engineering and non-technical attacks. Many online tools such as Followerwonk, Hootsuite, and Sysomos are available to search for both geotagged and non-geotagged information on social media sites. Attackers search social media sites using these online tools using keywords, usernames, date, time, and so on...

NEW QUESTION 446

Samuel a security administrator, is assessing the configuration of a web server. He noticed that the server permits SSLv2 connections, and the same private key certificate is used on a different server that allows SSLv2 connections. This vulnerability makes the web server vulnerable to attacks as the SSLv2 server can leak key information.

Which of the following attacks can be performed by exploiting the above vulnerability?

- A. DROWN attack
- B. Padding oracle attack
- C. Side-channel attack
- D. DUHK attack

Answer: A

Explanation:

DROWN is a serious vulnerability that affects HTTPS and other services that deem SSL and TLS, some of the essential cryptographic protocols for net security. These protocols allow everyone on the net to browse the net, use email, look on-line, and send instant messages while not third-parties being able to browse the communication.

DROWN allows attackers to break the encryption and read or steal sensitive communications, as well as passwords, credit card numbers, trade secrets, or financial data. At the time of public disclosure on March 2016, our measurements indicated thirty third of all HTTPS servers were vulnerable to the attack.

fortuitously, the vulnerability is much less prevalent currently. As of 2019, SSL Labs estimates that one.2% of HTTPS servers are vulnerable.

What will the attackers gain?Any communication between users and the server. This typically includes, however isn't limited to, usernames and passwords, credit card numbers, emails, instant messages, and sensitive documents. under some common scenarios, an attacker can also impersonate a secure web site and intercept or change the content the user sees.

Who is vulnerable?Websites, mail servers, and other TLS-dependent services are in danger for the DROWN attack. At the time of public disclosure, many popular sites were affected. we used Internet-wide scanning to live how many sites are vulnerable:


	Vulnerable at Disclosure (March 2016)
HTTPS — Top one million domains	25%
HTTPS — All browser-trusted sites	22%
HTTPS — All sites	33%

Operators of vulnerable servers got to take action. there's nothing practical that browsers or end-users will do on their own to protect against this attack.

Is my site vulnerable?Modern servers and shoppers use the TLS encryption protocol. However, because of misconfigurations, several servers also still support SSLv2, a 1990s-era precursor to TLS. This support did not matter in practice, since no up-to-date clients really use SSLv2. Therefore, despite the fact that SSLv2 is thought to be badly insecure, until now, simply supporting SSLv2 wasn't thought of a security problem, is a clients never used it.

DROWN shows that merely supporting SSLv2 may be a threat to fashionable servers and clients. It modern associate degree attacker to modern fashionable TLS connections between up-to-date clients and servers by sending probes to a server that supports SSLv2 and uses the same private key.


SSLv2

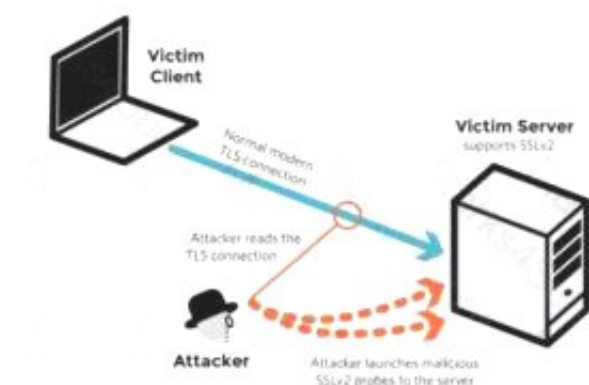

- It allows SSLv2 connections. This is surprisingly common, due to misconfiguration and inappropriate default settings.
- Its private key is used on any other server that allows SSLv2 connections, even for another protocol.

Many companies reuse the same certificate and key on their web and email servers, for instance. In this case, if the email server supports SSLv2 and the web server does not, an attacker can take advantage of the email server to break TLS connections to the web server.

A server is vulnerable to DROWN if:SSLv2

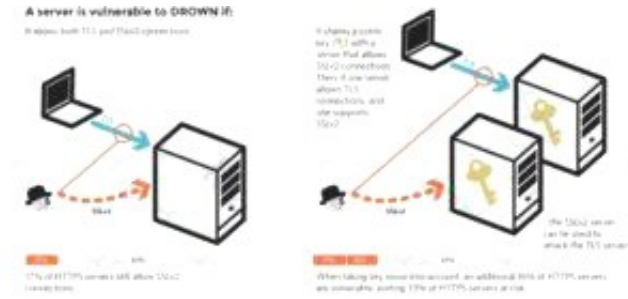

How do I protect my server?To protect against DROWN, server operators need to ensure that their private keys software used anywhere with server computer code that enables SSLv2 connections. This includes net servers, SMTP servers, IMAP and POP servers, and the other software that supports SSL/TLS.

Disabling SSLv2 is difficult and depends on the particular server software. we offer instructions here for many common products:

OpenSSL: OpenSSL may be a science library employed in several server merchandise. For users of OpenSSL, the simplest and recommended solution is to upgrade to a recent OpenSSL version. OpenSSL 1.0.2 users ought to upgrade to 1.0.2g. OpenSSL 1.0.1 users ought to upgrade to one.0.1s. Users of older OpenSSL versions ought to upgrade to either one in every of these versions. (Updated March thirteenth, 16:00 UTC) Microsoft IIS (Windows Server): Support for SSLv2 on the server aspect is enabled by default only on the OS versions that correspond to IIS 7.0 and IIS seven.5, particularly Windows scene, Windows Server 2008, Windows seven and Windows Server 2008R2. This support is disabled within the appropriate SSLv2 subkey for 'Server', as outlined in KB245030. albeit users haven't taken the steps to disable SSLv2, the export-grade and 56-bit ciphers that build DROWN possible don't seem to be supported by default.

Network Security Services (NSS): NSS may be a common science library designed into several server merchandise. NSS versions three.13 (released back in 2012) and higher than ought to have SSLv2 disabled by default. (A little variety of users might have enabled SSLv2 manually and can got to take steps to disable it.) Users of older versions ought to upgrade to a more modern version. we tend to still advocate checking whether or not your non-public secret is exposed elsewhere

Other affected software and in operation systems:

Instructions and data for: Apache, Postfix, Nginx, Debian, Red Hat

Browsers and other consumers: practical nothing practical that net browsers or different client computer code will do to stop DROWN. only server operators are ready to take action to guard against the attack.

NEW QUESTION 447

An Intrusion Detection System (IDS) has alerted the network administrator to a possibly malicious sequence of packets sent to a Web server in the network's external DMZ. The packet traffic was captured by the IDS and saved to a PCAP file. What type of network tool can be used to determine if these packets are genuinely malicious or simply a false positive?

- A. Protocol analyzer
- B. Network sniffer
- C. Intrusion Prevention System (IPS)
- D. Vulnerability scanner

Answer: A

NEW QUESTION 448

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v11 Practice Test Here](#)